

REL-LABS INC.*Hybrid Microelectronic Manufacturing*

30 Midland Avenue
Hicksville, N.Y. 11801
(516) 935-7272
FAX # (516) 935-8568

PRELIMINARY DATA SHEET
RL 75450 / 55450


DUAL POSITIVE AND PERIPHERAL DRIVER

ALL INPUT ELECTRICAL CHARACTERISTICS
SAME AS 75450B / 55450B

OUTPUT VOLTAGE	
DASH No.	VOLTAGE MAX.
-060	60
-080	80
-140	140
-150	150
-160	160
-180	180
-250	250
-300	300
-XXX	TBD *


* - Special characteristics or
transistor outputs.

EQUIVALENT CIRCUIT

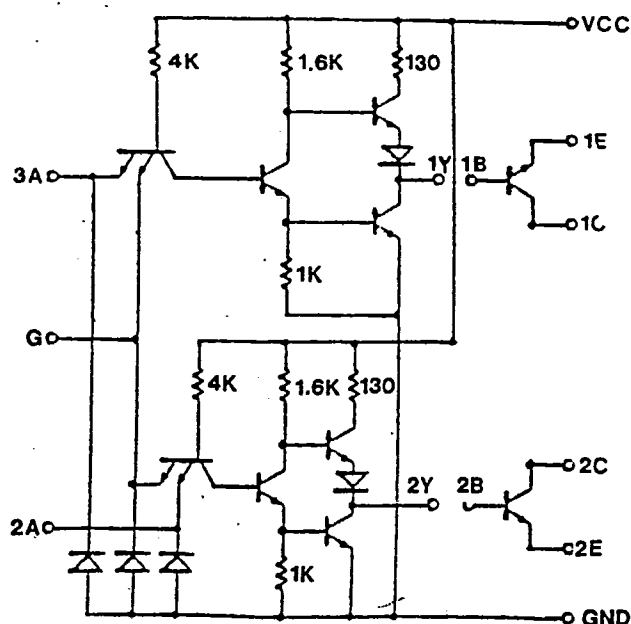

All resisitors in ohms.

CONNECTION DIAGRAM
14 LEAD DIP
(TOP VIEW)

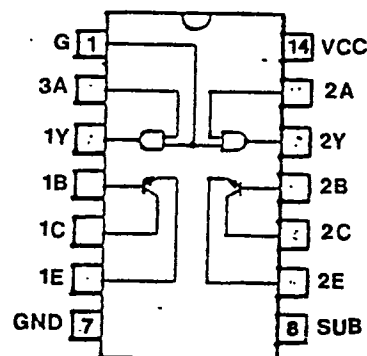

LOGIC FUNCTION

Positive Logic : Y= AG (gate only)
C= AG (gate and transistor)