


AT27C1024/L

T-46-13-29
T-46-13-25

Features

- Low Power CMOS Operation
 - 100 μ A max. Standby
 - 30 mA max. Active at 5 MHz (AT27C1024L)
 - 50 mA max. Active at 5 MHz (AT27C1024)
- Fast Read Access Time - 120ns
- Wide Selection of JEDEC Standard Packages Including OTP
 - 40-Lead 600 mil Cerdip and OTP Plastic DIP
 - 44-Pad LCC and OTP PLCC
- 5V $\pm$ 10% Supply
- High Reliability CMOS Technology
 - 2000V ESD Protection
 - 200mA Latchup Immunity
- Rapid Programming - 100 μ s/word (typical)
- Two-line Control
- CMOS and TTL Compatible Inputs and Outputs
- Integrated Product Identification Code
- Full Military, Commercial and Industrial Temperature Ranges

Block Diagram

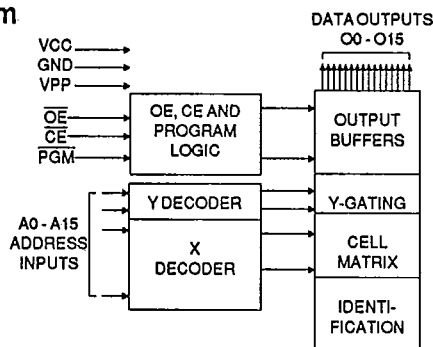

Description



The AT27C1024/L chip family is a low-power, high performance 1,048,576 bit Ultraviolet Erasable and Electrically Programmable Read Only Memory (EPROM) organized 64K x 16. They require only one 5V power supply in normal read mode operation. Any word can be accessed in less than 120ns, eliminating the need for speed reducing WAIT states. The by-16 organization makes these parts ideal for high-performance 16 and 32 bit microprocessor systems.

Two power versions are offered. In read mode, the AT27C1024 typically consumes 30mA while the AT27C1024L takes only 15mA. Standby mode supply current for both parts is typically less than 20 μ A.

Pin Configurations

Pin Name	Function
A0-A15	Addresses
O0-O15	Outputs
CE	Chip Enable
OE	Output Enable
PGM	Program Strobe
NC	No Connect

Note: Both GND pins must be connected.



Note: PLCC Package Pins 1 and 23 are DON'T CONNECT.



1 Megabit
(64K x 16)
UV
Erasable
CMOS
EPROM





T-46-13-29

T-46-13-25

Description (Continued)

The AT27C1024/L come in a choice of industry standard JEDEC-approved packages including; 40-pin DIP in ceramic or one time programmable (OTP) plastic, and 44-pad ceramic leadless chip carrier (LCC), or OTP plastic J-leaded chip carrier (PLCC). All devices feature two line control ($\overline{CE}$, $\overline{OE}$) to give designers the flexibility to prevent bus contention.

With high density 64K word storage capability, the AT27C1024/L allow firmware to be stored reliably and to be accessed by the system without the delays of mass storage media.

Atmel's 27C1024/L have additional features to ensure high quality and efficient production use. The Rapid Programming Algorithm reduces the time required to program the part and guarantees reliable programming. Programming time is typically only 100 μ s/word. The Integrated Product Identification Code electronically identifies the device and manufacturer. This feature is used by industry standard programming equipment to select the proper programming algorithms and voltages.

Absolute Maximum Ratings*

Temperature Under Bias	-55°C to +125°C
Storage Temperature.....	-65°C to +150°C
Voltage on Any Pin with Respect to Ground.....	-2.0V to +7.0V ⁽¹⁾
Voltage on A9 with Respect to Ground	-2.0V to +14.0V ⁽¹⁾
V _{PP} Supply Voltage with Respect to Ground.....	-2.0V to +14.0V ⁽¹⁾
Integrated UV Erase Dose.....	7258 W-sec/cm ²

*NOTICE: Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Erasure Characteristics

The entire memory array of the AT27C1024/L is erased (all outputs read as V_{OH}) after exposure to ultraviolet light at a wavelength of 2537Å. Complete erasure is assured after a minimum of 20 minutes exposure using 12,000 μ W/cm² intensity lamps spaced one inch away from the chip. Minimum erase time for lamps at other intensity ratings can be calculated from the minimum integrated erasure dose of 15W-sec/cm². To prevent unintentional erasure, an opaque label is recommended to cover the clear window on any UV erasable EPROM which will be subjected to continuous fluorescent indoor lighting or sunlight.

Notes:

1. Minimum voltage is -0.6V dc which may undershoot to -2.0V for pulses of less than 20ns. Maximum output pin voltage is V_{CC}+0.75V dc which may overshoot to +7.0V for pulses of less than 20ns.

Operating Modes

MODE \ PIN	$\overline{CE}$	$\overline{OE}$	PGM	Ai	V _{PP}	V _{CC}	Outputs
Read	V _{IL}	V _{IL}	X ⁽¹⁾	Ai	X	V _{CC}	DOUT
Output Disable	X	V _{IH}	X	X	X	V _{CC}	High Z
Standby	V _{IH}	X	X	X	X ⁽⁵⁾	V _{CC}	High Z
Rapid Program ⁽²⁾	V _{IL}	V _{IH}	V _{IL}	Ai	V _{PP}	V _{CC}	DIN
PGM Verify	V _{IL}	V _{IL}	V _{IH}	Ai	V _{PP}	V _{CC}	DOUT
PGM Inhibit	V _{IH}	X	X	X	V _{PP}	V _{CC}	High Z
Product Identification ⁽⁴⁾	V _{IL}	V _{IL}	X	A9=V _{IH} ⁽³⁾ A0=V _{IH} or V _{IL} A1-A15=V _{IL}	V _{CC}	V _{CC}	Identification Code

- Notes:
1. X can be V_{IL} or V_{IH}.
 2. Refer to Programming characteristics.
 3. V_{IH} = 12.0 $\pm$ 0.5V.
 4. Two identifier bytes may be selected. All Ai inputs are held low (V_{IL}), except A9 which is set to V_{IH}

5. Standby V_{CC} current (I_{SB}) is specified with V_{PP}=V_{CC}. V_{CC} > V_{PP} will cause a slight increase in I_{SB}.

AT27C1024/L

T-46-13-29

D.C. and A.C. Operating Conditions for Read Operation

T-46-13-25

		AT27C1024 / AT27C1024L				
		-12	-15	-17	-20	-25
Operating Temperature (Case)	Com.	0°C - 70°C	0°C - 70°C	0°C - 70°C	0°C - 70°C	0°C - 70°C
	Ind.		-40°C - 85°C	-40°C - 85°C	-40°C - 85°C	-40°C - 85°C
	Mil.		-55°C - 125°C	-55°C - 125°C	-55°C - 125°C	-55°C - 125°C
V _{CC} Power Supply		5V ± 5%	5V ± 10%	5V ± 10%	5V ± 10%	5V ± 10%

D.C. and Operating Characteristics for Read Operation

Symbol	Parameter	Condition	Min	Max	Units	
I _{LI}	Input Load Current	V _{IN} =-0.1V to V _{CC} +1V		5	μA	
I _{LO}	Output Leakage Current	V _{OUT} =-0.1V to V _{CC} +0.1V		10	μA	
I _{PP1} ⁽²⁾	V _{PP} ⁽¹⁾ Read/Standby Current	V _{PP} =3.8 to V _{CC} +0.3V		10	μA	
I _{SB}	V _{CC} ⁽¹⁾ Standby Current	I _{SB1} (CMOS) C _E =V _{CC} -0.3 to V _{CC} +1.0V		100	μA	
		I _{SB2} (TTL) C _E =2.0 to V _{CC} +1.0V		1	mA	
I _{CC}	V _{CC} Active Current	f=5MHz, I _{OUT} =0mA, C _E =V _{IL}	AT27C1024L	Com.	30	mA
				Ind.,Mil.	40	mA
		AT27C1024	Com.	50	mA	
			Ind.,Mil.	60	mA	
V _{IL}	Input Low Voltage		-0.6	0.8	V	
V _{IH}	Input High Voltage		2.0	V _{CC} +1	V	
V _{OL}	Output Low Voltage	I _{OL} =2.1mA		.45	V	
V _{OH}	Output High Voltage	I _{OH} =-100μA		V _{CC} -0.3	V	
		I _{OH} =-2.5mA		3.5	V	
		I _{OH} =-400μA		2.4	V	

Notes: 1. V_{CC} must be applied simultaneously or before V_{PP}, and removed simultaneously or after V_{PP}.

2. V_{PP} may be connected directly to V_{CC}, except during programming. The supply current would then be the sum of I_{CC} and I_{PP}.

A.C. Characteristics for Read Operation

				AT27C1024 / AT27C1024L										Units
				-12		-15		-17		-20		-25		
Symbol	Parameter	Condition		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	
t _{ACC} ⁽³⁾	Address to Output Delay	$\overline{CE}=\overline{OE}$ =V _{IL}	Com. Ind.,Mil.	120		150		170		200		250		ns
t _{CE} ⁽²⁾	$\overline{CE}$ to Output Delay	$\overline{OE}=\text{V}_{IL}$		120		150		170		200		250		ns
t _{OE} ^(2,3)	$\overline{OE}$ to Output Delay	$\overline{CE}=\text{V}_{IL}$		60		65		65		75		100		ns
t _{DF} ^(4,5)	$\overline{OE}$ High to Output Float	$\overline{CE}=\text{V}_{IL}$		30		40		50		55		60		ns
t _{OH}	Output Hold from Address, $\overline{CE}$ or $\overline{OE}$, whichever occurred first	$\overline{CE}=\overline{OE}$ =V _{IL}		0		0		0		0		0		ns

Notes: 2, 3, 4, 5. - see AC Waveforms for Read Operation.






T-46-13-29


A.C. Waveforms for Read Operation ⁽¹⁾

T-46-13-25

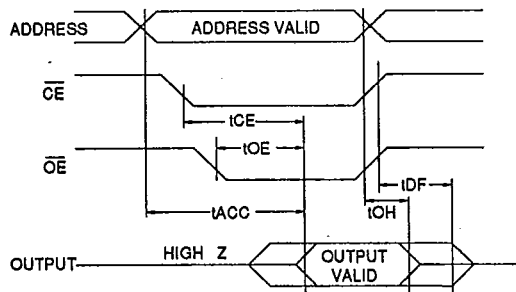


- Notes:
- 1. Timing measurement references are 0.8V and 2.0V. Input AC driving levels are 0.45V and 2.4V, unless otherwise specified.
 - 2. OE may be delayed up to t_{CE-tOE} after the falling edge of CE without impact on t_{CE} .
 - 3. OE may be delayed up to $t_{ACC-tOE}$ after the address is valid without impact on t_{ACC} .
 - 4. This parameter is only sampled and is not 100% tested.
 - 5. Output float is defined as the point when data is no longer driven.

Input Test Waveforms and Measurement Levels



$t_R, t_F < 20ns$ (10% to 90%)

Output Test Load

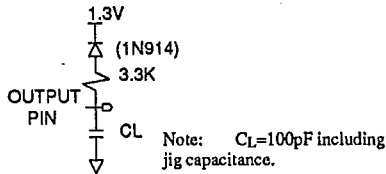


Pin Capacitance ($f=1MHz$ $T=25^{\circ}C$) ⁽¹⁾

	Typ	Max	Units	Conditions
C _{IN}	4	8	pF	V _{IN} = 0V
C _{OUT}	8	12	pF	V _{OUT} = 0V

Notes: 1. Typical values for nominal supply voltage. This parameter is only sampled and is not 100% tested.

Programming Waveforms ⁽¹⁾

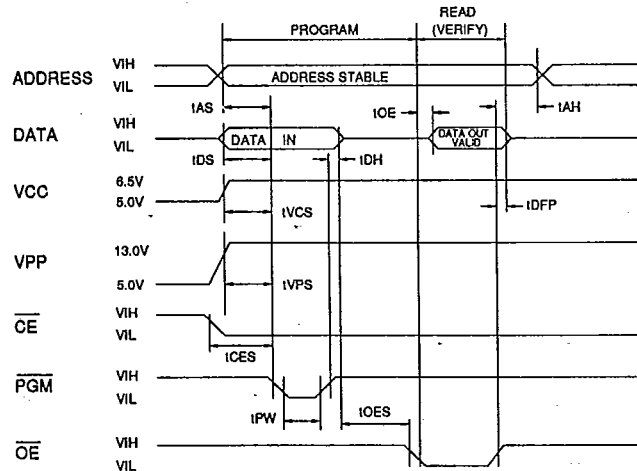

- Notes:
- 1. The Input Timing Reference is 0.8V for V_{IL} and 2.0V for V_{IH}.
 - 2. t_{OE} and t_{DFP} are characteristics of the device but must be accommodated by the programmer.
 - 3. When programming the AT27C1024/L a 0.1μF capacitor is required across V_{PP} and ground to suppress spurious voltage transients.

AT27C1024/L

T-46-13-29

T-46-13-25

D.C. Programming Characteristics

 $T_A = 25 \pm 5^\circ\text{C}$, $V_{CC} = 6.5 \pm 0.25\text{V}$, $V_{PP} = 13.0 \pm 0.25\text{V}$

Sym- bol	Parameter	Test Conditions	Limits		Units
			Min	Max	
I_{LI}	Input Load Current	$V_{IN} = V_{IL}, V_{IH}$	10		μA
V_{IL}	Input Low Level	(All Inputs)	-0.6	0.8	V
V_{IH}	Input High Level		2.0	$V_{CC} + 1$	V
V_{OL}	Output Low Volt.	$I_{OL} = 2.1\text{mA}$	.45		V
V_{OH}	Output High Volt.	$I_{OH} = -400\mu\text{A}$	2.4		V
I_{CC2}	Vcc Supply Current (Program and Verify)		50		mA
I_{PP2}	Vpp Supply Current	$\overline{CE} = \overline{PGM} = V_{IL}$	30		mA
V_{ID}	A9 Product Identifi- cation Voltage		11.5	12.5	V

Atmel's 27C1024/L Integrated
Product Identification Code:

Codes	Pins										Hex Data
	A0	015-08	07	06	05	04	03	02	01	00	
Manufacturer	0	0	0	0	0	1	1	1	1	0	001E
Device Type	1	0	1	1	1	1	0	0	0	1	00F1

Rapid Programming Algorithm

A 100 μs PGM pulse width is used to program. The address is set to the first location. Vcc is raised to 6.5V and Vpp is raised to 13.0V. Each address is first programmed with one 100 μs PGM pulse without verification. Then a verification / reprogramming loop is executed for each address. In the event a word fails to pass verification, up to 10 successive 100 μs pulses are applied with a verification after each pulse. If the word fails to verify after 10 pulses have been applied, the part is considered failed. After the word verifies properly, the next address is selected until all have been checked. Vpp is then lowered to 5.0V and Vcc to 5.0V. All words are read again and compared with the original data to determine if the device passes or fails.

A.C. Programming Characteristics

 $T_A = 25 \pm 5^\circ\text{C}$, $V_{CC} = 6.5 \pm 0.25\text{V}$, $V_{PP} = 13.0 \pm 0.25\text{V}$


Sym- bol	Parameter	Test Conditions* (see Note 1)	Limits		Units
			Min	Max	
t_{AS}	Address Setup Time		2		μs
t_{CES}	$\overline{CE}$ Setup Time		2		μs
t_{OES}	$\overline{OE}$ Setup Time		2		μs
t_{DS}	Data Setup Time		2		μs
t_{AH}	Address Hold Time		0		μs
t_{DH}	Data Hold Time		2		μs
t_{DFP}	$\overline{OE}$ High to Out- put Float Delay	(Note 2)	0	130	ns
t_{VPS}	Vpp Setup Time		2		μs
t_{VCS}	Vcc Setup Time		2		μs
t_{PW}	PGM Program Pulse Width	(Note 3)	95	105	μs
t_{OE}	Data Valid from $\overline{OE}$			150	ns

*A.C. Conditions of Test:

Input Rise and Fall Times (10% to 90%) 20ns
 Input Pulse Levels 0.45V to 2.4V
 Input Timing Reference Level 0.8V to 2.0V
 Output Timing Reference Level 0.8V to 2.0V

Notes:

1. Vcc must be applied simultaneously or before Vpp and removed simultaneously or after Vpp.
2. This parameter is only sampled and is not 100% tested. Output Float is defined as the point where data is no longer driven — see timing diagram.
3. Program Pulse width tolerance is 100 μs $\pm 5\%$.

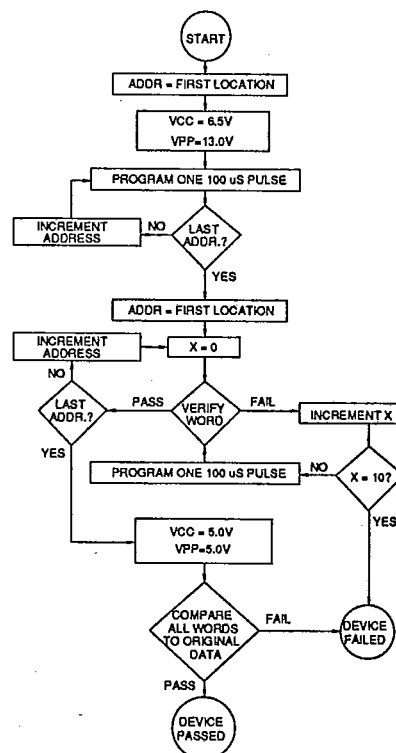



T-46-13-29

T-46-13-25

Ordering Information

t _{acc} (ns)	I _{cc} (mA)		Ordering Code	Package	Operation Range
	Active	Standby			
120	50	0.1	AT27C1024-12DC AT27C1024-12KC AT27C1024-12LC	40DW6 44KW 44LW	Commercial (0°C to 70°C)
150	50	0.1	AT27C1024-15DC AT27C1024-15JC AT27C1024-15KC AT27C1024-15LC AT27C1024-15PC	40DW6 44J 44KW 44LW 40P6	Commercial (0°C to 70°C)
150	60	0.1	AT27C1024-15DI AT27C1024-15JI AT27C1024-15KI AT27C1024-15LI AT27C1024-15PI	40DW6 44J 44KW 44LW 40P6	Industrial (-40°C to 85°C)
			AT27C1024-15DM AT27C1024-15KM AT27C1024-15LM	40DW6 44KW 44LW	Military (-55°C to 125°C)
			AT27C1024-15DM/883 AT27C1024-15KM/883 AT27C1024-15LM/883	40DW6 44KW 44LW	Military/883C Class B, Fully Compliant (-55°C to 125°C)
170	50	0.1	AT27C1024-17DC AT27C1024-17JC AT27C1024-17KC AT27C1024-17LC AT27C1024-17PC	40DW6 44J 44KW 44LW 40P6	Commercial (0°C to 70°C)
170	60	0.1	AT27C1024-17DI AT27C1024-17JI AT27C1024-17KI AT27C1024-17LI AT27C1024-17PI	40DW6 44J 44KW 44LW 40P6	Industrial (-40°C to 85°C)
			AT27C1024-17DM AT27C1024-17KM AT27C1024-17LM	40DW6 44KW 44LW	Military (-55°C to 125°C)
			AT27C1024-17DM/883 AT27C1024-17KM/883 AT27C1024-17LM/883	40DW6 44KW 44LW	Military/883C Class B, Fully Compliant (-55°C to 125°C)
200	50	0.1	AT27C1024-20DC AT27C1024-20JC AT27C1024-20KC AT27C1024-20LC AT27C1024-20PC	40DW6 44J 44KW 44LW 40P6	Commercial (0°C to 70°C)
200	60	0.1	AT27C1024-20DI AT27C1024-20JI AT27C1024-20KI AT27C1024-20LI AT27C1024-20PI	40DW6 44J 44KW 44LW 40P6	Industrial (-40°C to 85°C)
			AT27C1024-20DM AT27C1024-20KM AT27C1024-20LM	40DW6 44KW 44LW	Military (-55°C to 125°C)

AT27C1024/L

T-46-13-29

T-46-13-25

Ordering Information

tACC (ns)	Icc (mA)		Ordering Code	Package	Operation Range
	Active	Standby			
200	60	0.1	AT27C1024-20DM/883 AT27C1024-20KM/883 AT27C1024-20LM/883	40DW6 44KW 44LW	Military/883C Class B, Fully Compliant (-55°C to 125°C)
250	50	0.1	AT27C1024-25DC AT27C1024-25JC AT27C1024-25KC AT27C1024-25LC AT27C1024-25PC	40DW6 44J 44KW 44LW 40P6	Commercial (0°C to 70°C)
250	60	0.1	AT27C1024-25DI AT27C1024-25JI AT27C1024-25KI AT27C1024-25LI AT27C1024-25PI	40DW6 44J 44KW 44LW 40P6	Industrial (-40°C to 85°C)
			AT27C1024-25DM AT27C1024-25KM AT27C1024-25LM	40DW6 44KW 44LW	Military (-55°C to 125°C)
			AT27C1024-25DM/883 AT27C1024-25KM/883 AT27C1024-25LM/883	40DW6 44KW 44LW	Military/883C Class B, Fully Compliant (-55°C to 125°C)
170	60	0.1	5962-86805 04 QX 5962-86805 04 XX	40DW6 44LW	Military/883C Class B, Fully Compliant (-55°C to 125°C)
200	60	0.1	5962-86805 03 QX 5962-86805 03 XX	40DW6 44LW	Military/883C Class B, Fully Compliant (-55°C to 125°C)
250	60	0.1	5962-86805 02 QX 5962-86805 02 XX	40DW6 44LW	Military/883C Class B, Fully Compliant (-55°C to 125°C)
300	60	0.1	5962-86805 01 QX 5962-86805 01 XX	40DW6 44LW	Military/883C Class B, Fully Compliant (-55°C to 125°C)

Package Type

40DW6	40 Lead, 0.600" Wide, Windowed, Ceramic Dual Inline Package (Cerdip)
44J	44 Lead, Plastic J-Leaded Chip Carrier OTP (PLCC)
44KW	44 Lead, Windowed, Ceramic J-Leaded Chip Carrier (JLCC)
44LW	44 Pad, Windowed, Ceramic Leadless Chip Carrier (LCC)
40P6	40 Lead, 0.600" Wide, Plastic Dual Inline package OTP (PDIP)





T-46-13-25

Ordering Information

tacc (ns)	Icc (mA)		Ordering Code	Package	Operation Range
	Active	Standby			
120	30	0.1	AT27C1024L-12DC AT27C1024L-12KC AT27C1024L-12LC	40DW6 44KW 44LW	Commercial (0°C to 70°C)
150	30	0.1	AT27C1024L-15DC AT27C1024L-15JC AT27C1024L-15KC AT27C1024L-15LC AT27C1024L-15PC	40DW6 44J 44KW 44LW 40P6	Commercial (0°C to 70°C)
150	40	0.1	AT27C1024L-15DI AT27C1024L-15JI AT27C1024L-15KI AT27C1024L-15LI AT27C1024L-15PI	40DW6 44J 44KW 44LW 40P6	Industrial (-40°C to 85°C)
			AT27C1024L-15DM AT27C1024L-15KM AT27C1024L-15LM	40DW6 44KW 44LW	Military (-55°C to 125°C)
			AT27C1024L-15DM/883 AT27C1024L-15KM/883 AT27C1024L-15LM/883	40DW6 44KW 44LW	Military/883C Class B, Fully Compliant (-55°C to 125°C)
170	30	0.1	AT27C1024L-17DC AT27C1024L-17JC AT27C1024L-17KC AT27C1024L-17LC AT27C1024L-17PC	40DW6 44J 44KW 44LW 40P6	Commercial (0°C to 70°C)
170	40	0.1	AT27C1024L-17DI AT27C1024L-17JI AT27C1024L-17KI AT27C1024L-17LI AT27C1024L-17PI	40DW6 44J 44KW 44LW 40P6	Industrial (-40°C to 85°C)
			AT27C1024L-17DM AT27C1024L-17KM AT27C1024L-17LM	40DW6 44KW 44LW	Military (-55°C to 125°C)
			AT27C1024L-17DM/883 AT27C1024L-17KM/883 AT27C1024L-17LM/883	40DW6 44KW 44LW	Military/883C Class B, Fully Compliant (-55°C to 125°C)
200	30	0.1	AT27C1024L-20DC AT27C1024L-20JC AT27C1024L-20KC AT27C1024L-20LC AT27C1024L-20PC	40DW6 44J 44KW 44LW 40P6	Commercial (0°C to 70°C)
200	40	0.1	AT27C1024L-20DI AT27C1024L-20JI AT27C1024L-20KI AT27C1024L-20LI AT27C1024L-20PI	40DW6 44J 44KW 44LW 40P6	Industrial (-40°C to 85°C)

AT27C1024/L

T-46-13-29

T-46-13-25

Ordering Information

t _{acc} (ns)	I _{cc} (mA)		Ordering Code	Package	Operation Range
	Active	Standby			
200	40	0.1	AT27C1024L-20DM AT27C1024L-20KM AT27C1024L-20LM	40DW6 44KW 44LW	Military (-55°C to 125°C)
			AT27C1024L-20DM/883 AT27C1024L-20KM/883 AT27C1024L-20LM/883	40DW6 44KW 44LW	Military/883C Class B, Fully Compliant (-55°C to 125°C)
250	30	0.1	AT27C1024L-25DC AT27C1024L-25JC AT27C1024L-25KC AT27C1024L-25LC AT27C1024L-25PC	40DW6 44J 44KW 44LW 40P6	Commercial (0°C to 70°C)
250	40	0.1	AT27C1024L-25DI AT27C1024L-25JI AT27C1024L-25KI AT27C1024L-25LI AT27C1024L-25PI	40DW6 44J 44KW 44LW 40P6	Industrial (-40°C to 85°C)
			AT27C1024L-25DM AT27C1024L-25KM AT27C1024L-25LM	40DW6 44KW 44LW	Military (-55°C to 125°C)
			AT27C1024L-25DM/883 AT27C1024L-25KM/883 AT27C1024L-25LM/883	40DW6 44KW 44LW	Military/883C Class B, Fully Compliant (-55°C to 125°C)

Package Type

40DW6	40 Lead, 0.600" Wide, Windowed, Ceramic Dual Inline Package (Cerdip)
44J	44 Lead, Plastic J-Leaded Chip Carrier OTP (PLCC)
44KW	44 Lead, Windowed, Ceramic J-Leaded Chip Carrier (JLCC)
44LW	44 Pad, Windowed, Ceramic Leadless Chip Carrier (LCC)
40P6	40 Lead, 0.600" Wide, Plastic Dual Inline Package OTP (PDIP)

