


Product Brief ISAR34 PSB 7115

Enhanced ISDN Data Access Controller

The ISAR 34, ISDN Data Access Controller forms an enhanced solution for ISDN applications communicating with remote ISDN as well as analog terminals. The new ISAR 34 supports modem modulation up to 33600 bit/s (V.34+), fax up to 14400 bit/s and 3 HDLC controllers. The ISAR 34 platform is upgradable to standards like modem V.PCM or audio compression G.728.

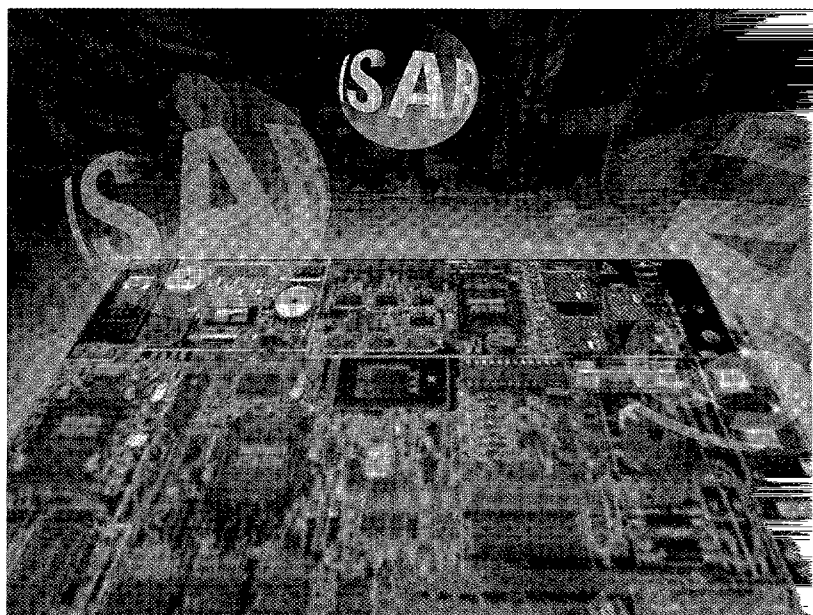

Potential Application

- ISDN PC/Workstation Adapter
- ISDN Voice/Data Terminal
- Analog Voice/Data Modem
- Analog Videophone
- Embedded Modem (e.g. Set-Top-Box)

Features

- Modem modulation up to 33600 bit/s (V.34bis) including fallback modes

- Fax modulation up to 14400 bit/s (V.17) including fallback modes
- Bit rate adaptation according to V.110 for both B-channels (except during datamodem modulation)
- Two Channel DTMF generation and detection
- Two universal formatter supporting ASYNC (ITU-T V.14), HDLC and binary framing of data for B-channel applications

- ISDN C/I-channel and MONITOR channel handler
- IOM-2 terminal mode (1.536 MHz), line card mode (4.096 MHz)
- External memory interface to connect external program and data memory
- Supports host based (program download to external SRAM) and standalone (flash memory) applications
- Mailbox interface for host communication
- 253 byte FIFO per direction for host interface communication of B-channel data
- 3.3 V / 5 V power supply
- Advanced CMOS technology


Packing

Type	Ordering Code	Package
ISAR34 PSB 7115 F V2.1	Q67227-H1015	P-TQFP-144-2

Product status

Product	Step	Status	Changes
ISAR34 PSB 7115 F	V2.1	ES Q4/97	—

ISAR34 Block Diagram

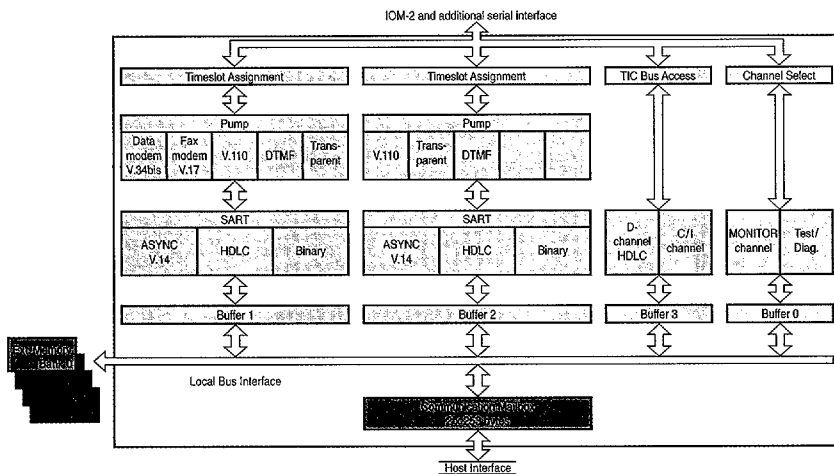

Design-In material (Please contact our sales office for details)


	Date of issue/version	Type of material
ISAR34 PSB 7115 Product overview	7/97	Copy

Development Tooling


	Availability	Ordering number
SIPB 7115 ISAR34 Demo Board with S- and ALIS Interface	Q4/97	Q67220-H1053
SIPB 7115 ISAR34 Demo Board with S- and ALIS Interface, complete package	1/98 SW, β release	Q67220-H1053

Applications

Standalone Videophone (H.320, H.324, kompatibel)

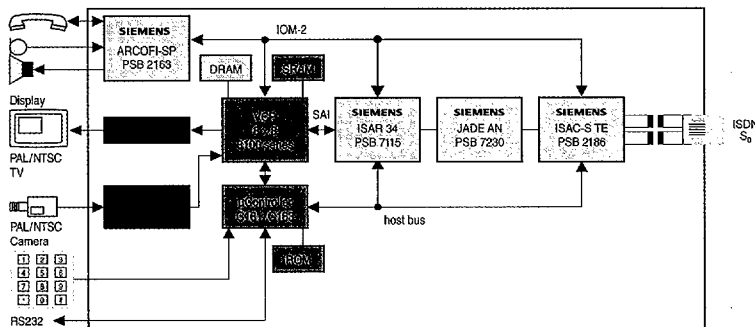

ISDN PC-card featuring ISDN, modem, fax

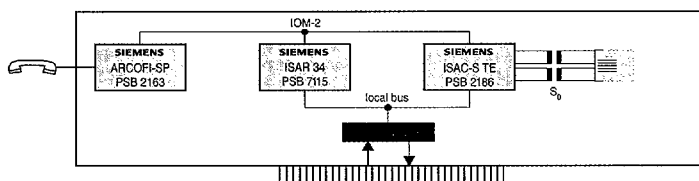

A Wien ☎ (1) 17 07-356 11	IRL Dublin ☎ (01) 668 47 27
AUS Richmond (Melbourne) Vic. 3121 ☎ (03) 420 71 11	J Tokyo ☎ (81) 3-54 49-64
B Brussel/Bruxelles ☎ (2) 536 23 48	N Oslo ☎ (02) 63 30 00
BR São Paulo-SP ☎ (55) 118 36 25 47	NL Den Haag ☎ (70) 333 24 29
CDN Mississauga, Ontario L5T 1P2 ☎ (416) 905-819-80 00	P Amadora ☎ (01) 417 00 11
CH Zürich ☎ (01) 495-31 11	PL Warszawa ☎ (022) 670-91-52
D Düsseldorf ☎ (0211) 399-29 30 Laaten (Hannover) ☎ (0511) 877-22 22 München ☎ (089) 92 21-40 86 Nürnberg ☎ (0911) 654-76 99 Stuttgart ☎ (0711) 137-33 14	PRC North Shanghai ☎ (86) 21-63 61 2618/19 Beijing ☎ (86) 10-6857 90 06/07
DK Ballerup ☎ 44 77 44 77	RC Taipei ☎ (02) 523 79 90
E Tres Cantos-Madrid ☎ (1) 514 80 00	RUS Moskau ☎ (095) 237-64 76, -69 11
F Saint-Denis CEDEX 2 ☎ (1) 49 22 31 00	S Kista ☎ (08) 703 35 00
GB Berkshire RG12 8FZ ☎ (0344) 39 60 00	SE Espoo ☎ (0) 510 51
GR Amaroussio/Athen ☎ (01) 6 86 41 11	SGP Singapore ☎ (65) 741 74 18
HK Hong Kong ☎ (852) 28 32 05 00	TR Findikli ☎ (01) 251 09 00
I Milano ☎ (02) 66 76-1	USA Cupertino ☎ (408) 777-45 00
IND Bombay ☎ (022) 493 87 86	ZA Halfway House ☎ (11) 652-20 00, -27 00

How to reach us:

[http://www.siemens.de/semiconductor/
address/address.htm](http://www.siemens.de/semiconductor/address/address.htm)

© Siemens AG 1998.

All Rights Reserved.

Please note that any information contained in this publication may be subject to change. Siemens reserves the right to make changes to or to discontinue any product or service identified in this publication without notice.

Please contact our regional offices to receive the latest version of the relevant information to verify, before placing orders, that the information being relied upon is current.

Published by Semiconductor Group

Siemens Aktiengesellschaft

96707

Ordering No. B118-H7202-X-X-7600
Printed in Germany
PS 02982.

1102980021

8235605 0104358 530

2