

Am99C641/Am99CL641

65,536 x 1 Static Read/Write Random-Access Memory



Am99C641/Am99CL641

Advanced Micro Devices

DISTINCTIVE CHARACTERISTICS

- High-performance CMOS circuit design and process
- High Speed – access times as fast as 25 ns
- Single 5-V $\pm 10\%$ power-supply operation
- Low power – 550 mW active
110 mW TTL – Standby
- 2 V data retention for battery back up applications
- Fully static — no clocks or timing signals required
- Standard 22-pin slim (0.300 inch) DIP, (plastic and ceramic), and 22-pin rectangular ceramic leadless chip carriers.


GENERAL DESCRIPTION

The Am99C641 is a high-performance, Static CMOS, read/write random-access memory organized as 65,536 words with 1 bit per word. The Am99C641 features single 5-V operation with automatic power-down capability. All inputs and outputs are fully TTL-compatible. There are separate data input and output pins which, along with the two control

signals $\overline{CE}$ and $\overline{WE}$, provide ease of expansion in large memory-array applications.

In addition to low TTL-level standby power, this device offers a low CMOS-level standby power of 1.65 mW and a low data retention current of 0.1 mA with V_{CC} at 2 V.

BLOCK DIAGRAM

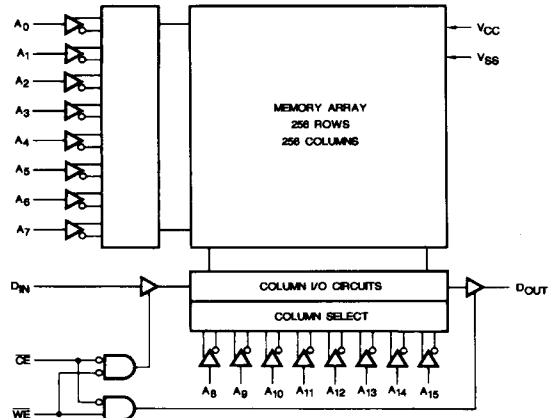

BD005691

3
4769

004769

Orig

AMD

1

Publication #	Rev.	Amendment
07438	D	/0
Issue Date: June 1987		

PRODUCT SELECTOR GUIDE


Family Part No.			Am99C641/Am99CL641				
Ordering Part No.			-25	-35	-45	-55	-70
Access Time (ns)			25	35	45	55	70
Commercial (C) Devices: 0 to +70°C	Symbol	Power*					
	I _{CC} (mA)	S	120	110	100	90	85
		L	100	90	85	80	80
	I _{SB1} (mA)	S	55	45	40	40	40
		L	20	20	20	20	20
	I _{SB2} (mA)	S	20	20	20	20	20
		L	10	10	10	10	10
	I _{SB3} (mA)	S	15	15	15	15	15
		L	0.3	0.3	0.3	0.3	0.3
	I _{CCDR} (mA) @ 2 V	S	-	-	-	-	-
		L	0.1	0.1	0.1	0.1	0.1
Extended Commercial (E) and Military (M) Devices -55 to +125°C	I _{CC} (mA)	S	-	120	110	100	95
		L	-	100	95	90	90
	I _{SB1} (mA)	S	-	50	45	45	45
		L	-	20	20	20	20
	I _{SB2} (mA)	S	-	30	30	30	30
		L	-	15	15	15	15
	I _{SB3} (mA)	S	-	20	20	20	20
		L	-	1.5	1.5	1.5	1.5
	I _{CCDR} (mA) @ 2 V	S	-	-	-	-	-
		L	-	0.3	0.3	0.3	0.3

*S = Standard Power (Am99C641)

L = Low Power (Am99CL641)


CONNECTION DIAGRAMS **Top View**

DIPs

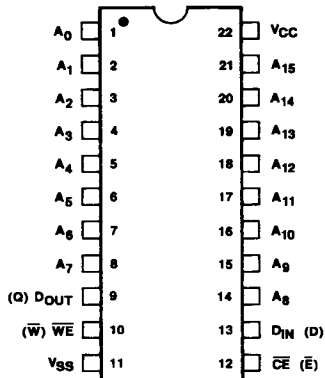

CD008092


LCC

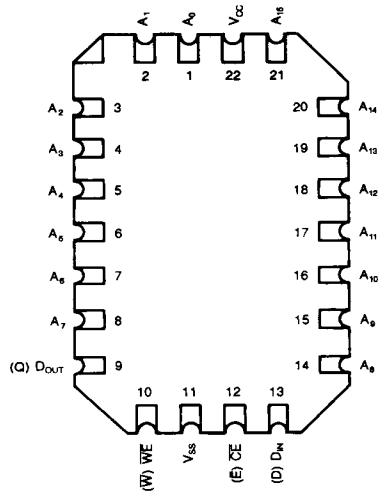

CD009284

Note: Pin 1 is marked for orientation.
IEEE Nomenclature in Brackets.

LOGIC SYMBOL

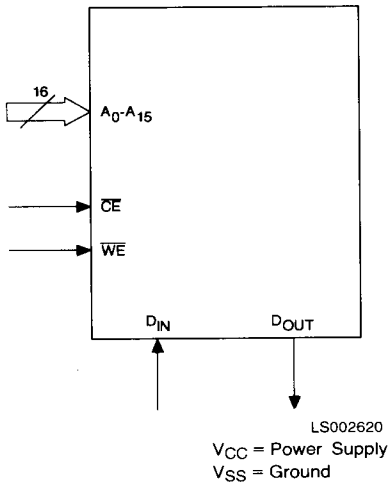


Address Designators	
External	Internal
A ₀	A ₂
A ₁	A ₃
A ₂	A ₅
A ₃	A ₆
A ₄	A ₇
A ₅	A ₁₂
A ₆	A ₁₀
A ₇	A ₁₁
A ₈	A ₉
A ₉	A ₈
A ₁₀	A ₁₄
A ₁₁	A ₁₃
A ₁₂	A ₀
A ₁₃	A ₁
A ₁₄	A ₄
A ₁₅	A ₁₅

ORDERING INFORMATION

Standard Products

AMD products are available in several packages and operating ranges. The order number (Valid Combination) is formed by a combination of:

- a. **Device Number**
- b. **Speed Option** (if applicable)
- c. **Package Type**
- d. **Temperature Range**
- e. **Optional Processing**

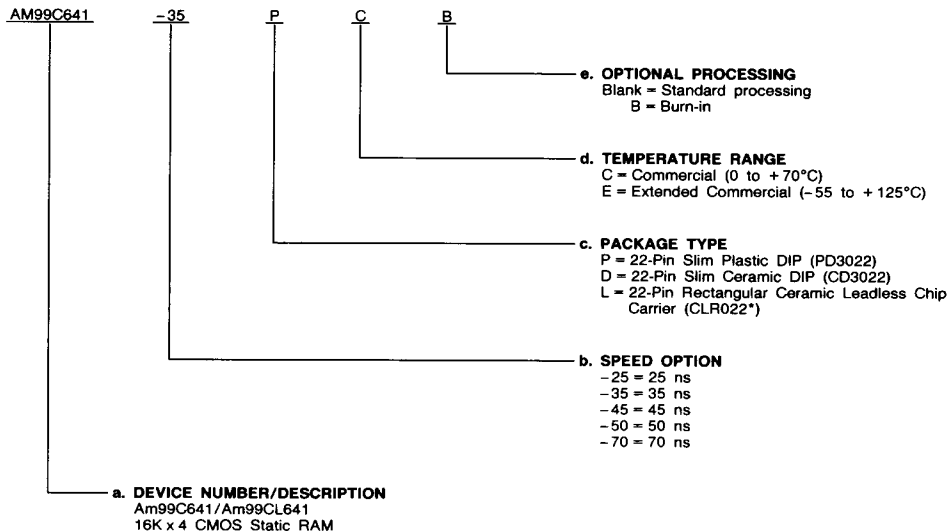

Valid Combinations	
AM99C641-25	PC, PCB, DC, DCB, LC, LCB
AM99CL641-25	
AM99C641-35	PC, PCB, DC, DCB, DE, DEB, LC, LCB, LE, LEB
AM99CL641-35	
AM99C641-45	
AM99CL641-45	
AM99C641-55	
AM99CL641-55	
AM99C641-70	
AM99CL641-70	

Valid Combinations

Valid Combinations list configurations planned to be supported in volume for this device. Consult the local AMD sales office to confirm availability of specific valid combinations, to check on newly released combinations, and to obtain additional data on AMD's standard military grade products.

*Preliminary. Subject to Change.

ORDERING INFORMATION (Cont'd.)

APL and CPL Products

AMD products for Aerospace and Defense applications are available in several packages and operating ranges. APL (Approved Products List) products are fully compliant with MIL-STD-883C requirements. CPL (Controlled Products List) products are processed in accordance with MIL-STD-883C, but are inherently non-compliant because of package, solderability, or surface treatment exceptions to those specifications. The order number (Valid Combination) is formed by a combination of:


APL Products:

- a. Device Number
- b. Speed Option (if applicable)
- c. Device Class
- d. Package Type
- e. Lead Finish

CPL Products:

- a. Device Number
- b. Speed Option (if applicable)
- c. Package Type
- d. Temperature Range
- e. CPL Status


APL Products

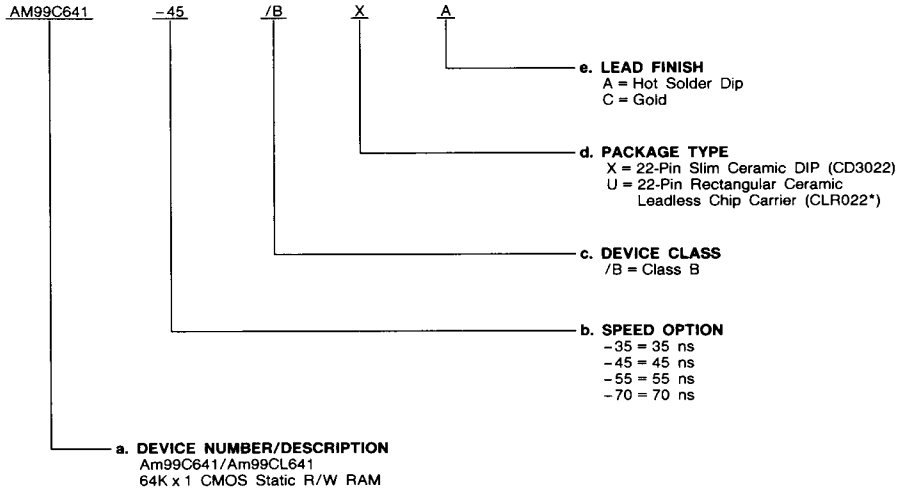

*Preliminary. Subject to Change.

ORDERING INFORMATION (Cont'd.)

CPL Products

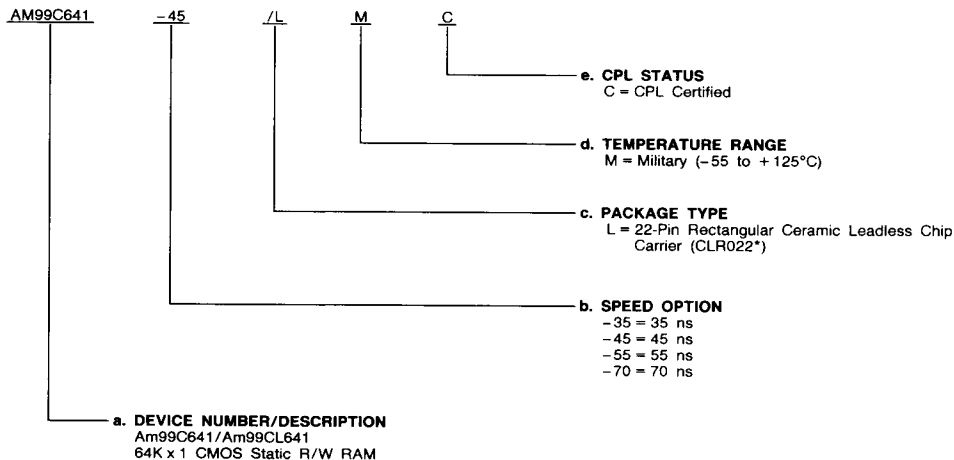

*Preliminary. Subject to Change.

Valid Combinations		
A P L	AM99C641-35	/BXA, /BXC, /BUA
	AM99CL641-35	
	AM99C641-45	
	AM99CL641-45	
	AM99C641-55	
	AM99CL641-55	
	AM99C641-70	
C P L	AM99CL641-70	
	AM99C641-35	/LMC
	AM99CL641-35	
	AM99C641-45	
	AM99CL641-45	
	AM99C641-55	
	AM99CL641-55	
	AM99C641-70	
	AM99CL641-70	

Valid Combinations

Valid Combinations list configurations planned to be supported in volume for this device. Consult the local AMD sales office to confirm availability of specific valid combinations or to check for newly released valid combinations.

Group A Tests

Group A tests consist of Subgroups
1, 2, 3, 7, 8, 9, 10, 11.

PIN DESCRIPTION

A₀-A₁₅ Address (Inputs)

The Address input lines select the RAM location to be read or written.

$\overline{\text{CE}}$ Chip Enable (Input, Active LOW)

The Chip Enable selects the memory device. $\overline{\text{WE}}$ is ignored when $\overline{\text{CE}}$ is HIGH.

$\overline{\text{WE}}$ Write Enable (Input, Active LOW)

When $\overline{\text{WE}}$ is LOW and $\overline{\text{CE}}$ is LOW, data will be written into the location specified on the Address pins. When $\overline{\text{WE}}$ is

HIGH and $\overline{\text{CE}}$ is LOW, data will be read out and placed on the D_{OUT} pin.

D_{IN} Data Input

This pin is used for entering data during write operations.

D_{OUT} Data Output (Three-State)

This pin is three-state during write operations. It becomes active when $\overline{\text{CE}}$ is LOW and $\overline{\text{WE}}$ is HIGH.

V_{CC} Power Supply

V_{SS} Ground

ABSOLUTE MAXIMUM RATINGS (Note 1)

Storage Temperature	
Ceramic Packages.....	-65 to +150°C
Plastic Packages.....	-55 to +125°C
Ambient Temperature with Power Applied	
Ceramic Packages.....	-55 to +125°C
Plastic Packages.....	-10 to +85°C
DC Supply Voltage	
to Ground Potential Continuous.....	-0.5 to +7.0 V
All Signal Voltages.....	-0.5 to +7.0 V
DC Output Current.....	20 mA
Power Dissipation.....	1.0 W

Stresses above those listed under **ABSOLUTE MAXIMUM RATINGS** may cause permanent device failure. Functionality at or above these limits is not implied. Exposure to absolute maximum ratings for extended periods may affect device reliability.

DC CHARACTERISTICS over operating range unless otherwise specified (for APL Products, Group A, Subgroups 1, 2, 3 are tested unless otherwise noted)

OPERATING RANGES (Note 2)

Commercial (C) Devices	
Temperature (T _A).....	0 to +70°C
Supply Voltage (V _{CC}).....	4.5 to +5.5 V
Extended Commercial (E) and Military (M) Devices	
Temperature (T _A).....	-55 to +125°C
Supply Voltage (V _{CC}).....	+4.5 to +5.5 V

Operating ranges define those limits between which the functionality of the device is guaranteed.

Parameter Symbol	Parameter Description	Test Conditions	Min.	Max.	Units
V _{OH}	Output HIGH Voltage	V _{CC} = Min., I _{OH} = -4 mA	2.4		V
V _{OL}	Output LOW Voltage	V _{CC} = Min., I _{OL} = 8 mA		0.4	V
V _{IH}	Input HIGH Voltage		2.2	V _{CC} + 1.0	V
V _{IL}	Input LOW Voltage	(Note 9)	-0.5	0.8	V
I _{IX}	Input Load Current	GND ≤ V _{IN} ≤ V _{CC}		2.0	μA
I _{OZ}	Output Leakage Current	GND ≤ V _{OUT} ≤ V _{CC} , CE ≥ V _{IH}		2.0	μA

DC CHARACTERISTICS over Commercial (0 to +70°C) Operating Range*

Parameter Symbol	Parameter Description	Test Conditions	Power**	Am99C641/Am99CL641					Units
				-25	-35	-45	-55	-70	
I _{CC}	Dynamic Operating Supply Current	Cycle = Min., Duty = 100%, CE ≤ V _{IL} , I/O = 0 mA	S	120	110	100	90	85	mA
			L	100	90	85	80	80	mA
I _{CC1}	Static Operating Supply Current	CE ≤ V _{IL} , I/O = 0 mA	S	90	90	80	80	80	mA
			L	60	60	50	50	50	mA
I _{SB1}	Standby Current, Cycling TTL Levels	CE ≥ V _{IH} , V _{CC} = Max., Cycle = Min.	S	55	45	40	40	40	mA
			L	40	35	30	25	20	mA
I _{SB2}	Standby Current, Stable TTL Levels	CE ≥ V _{IH} , V _{IN} ≥ V _{IH} or ≤ V _{IL}	S	20	20	20	20	20	mA
			L	10	10	10	10	10	mA
I _{SB3}	Standby Current, Stable CMOS Input Levels	CE ≥ V _{CC} - 0.2 V, V _{IN} ≥ V _{CC} - 0.2 V or ≤ 0.2 V	S	15	15	15	15	15	mA
			L	0.3	0.3	0.3	0.3	0.3	mA

Notes: See notes following Capacitance table on the following page.

*All values are guaranteed maximum limits.

**S = Standard Power (Am99C641)

L = Low Power (Am99CL641)

DC CHARACTERISTICS over Extended Commercial and Military (–55 to +125°C) Operating Ranges*

Parameter Symbol	Parameter Description	Test Conditions	Power**	Am99C641/Am99CL641				Unit
				–35	–45	–55	–70	
I _{CC}	Dynamic Operating Supply Current	Cycle = Min., Duty = 100%, $\overline{CE} \leq V_{IL}$, I/O = 0 mA	S	120	110	100	95	mA
			L	100	95	90	90	mA
I _{CC1}	Static Operating Supply Current	$\overline{CE} \leq V_{IL}$, I/O = 0 mA	S	100	100	100	100	mA
			L	60	50	50	50	mA
I _{SB1}	Standby Current, Cycling TTL Levels	$\overline{CE} \geq V_{IH}$, V _{CC} = Max., Cycle = Min.	S	50	45	45	45	mA
			L	35	30	25	20	mA
I _{SB2}	Standby Current, Stable TTL Levels	$\overline{CE} \geq V_{IH}$, V _{IN} = V _{IH} or $\leq V_{IL}$	S	30	30	30	30	mA
			L	15	15	15	15	mA
I _{SB3}	Standby Current, Stable CMOS Input Levels	$\overline{CE} \geq V_{CC} - 0.2$ V, V _{IN} $\geq V_{CC} - 0.2$ V or ≤ 0.2 V	S	20	20	20	20	mA
			L	1.5	1.5	1.5	1.5	mA

*All values are guaranteed maximum limits.

**S = Standard Power (Am99C641)

L = Low Power (Am99CL641)

CAPACITANCE†

Parameter Symbol	Parameter Description	Test Conditions	Min.	Max.	Units
C _I ††	Input Capacitance	f = 1 MHz, V _{IN} = 0 V		6.0	pF
C _O ††	Output Capacitance	V _{OUT} = 0 V		7.0	

† These capacitances are not 100% tested, but are evaluated at initial characterization and at any time the product is modified where capacitance may be affected. Measurement performed at T_A = +25°C.

†† Not included in Group A tests.

Notes:


1. Absolute Maximum Ratings are intended for user guidelines and are not tested.
2. For test and correlation purposes, ambient temperature is defined as the stabilized case temperature.
3. Parameter not tested—guaranteed by characterization.
4. Test conditions assume signal transition times of 5 ns or less, timing reference levels of 1.5 V, input-pulse levels of 0 to 3.0 V, and output loading of specified I_{OL}/I_{OH} and 30-pF load capacitance. Output timing reference is 1.5 V (see Test Load A in Switching Test Circuits section).
5. The internal write time of the memory is defined by the overlap of $\overline{CE}$ active and $\overline{WE}$ LOW. Both signals must be active to initiate a write and either signal can terminate a write by going inactive. The data input setup and hold timing should be referenced to the transition edge that terminates the write.
6. The minimum limit is not tested and is included for design information only.
7. Parameter not tested, guaranteed by characterization using the load shown in Test Load B—Switching Test Circuits. Transition is measured ± 500 mV from steady state voltage.
8. Address input rise and fall times must not exceed 1 μ s when $\overline{CE}$ is active. The limit is not tested and is intended for design information only.
9. Undershoot to –3.0 V for a duration of 10 ns between the 50% amplitude point is permissible.

KEY TO SWITCHING WAVEFORMS


WAVEFORM	INPUTS	OUTPUTS
	MUST BE STEADY	WILL BE STEADY
	MAY CHANGE FROM H TO L	WILL BE CHANGING FROM H TO L
	MAY CHANGE FROM L TO H	WILL BE CHANGING FROM L TO H
	DON'T CARE; ANY CHANGE PERMITTED	CHANGING; STATE UNKNOWN
	DOES NOT APPLY	CENTER LINE IS HIGH IMPEDANCE "OFF" STATE

KS000010

SWITCHING TEST CIRCUITS




Test Load A



Test Load B

SWITCHING TEST WAVEFORM

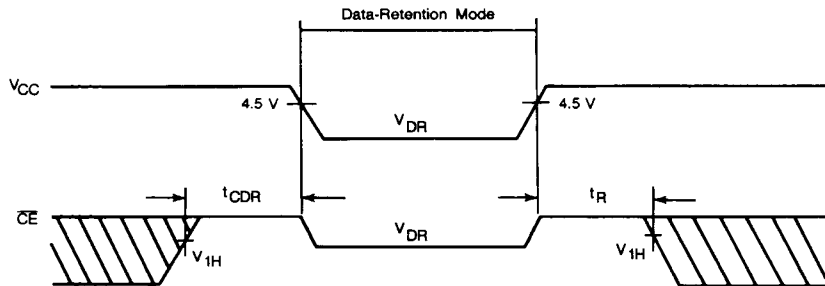

WF021434

Low V_{CC} Data Retention Characteristics (Low-Power Version Only)

Parameter Symbol	Parameter Description	Test Conditions		Min.	Max.	Units
V_{DR}	V_{CC} for Data Retention	$\overline{CE} \geq V_{CC} - 0.2 \text{ V}$		2.0		V
I_{CCDR}	Data Retention Current	$V_{CC} = 2 \text{ V}$	COM'L MIL		0.1 0.3	mA
I_{CCDR}	Data Retention Current	$V_{CC} = 3 \text{ V}$	COM'L MIL		0.15 0.45	mA
t_{CDR}	Chip Deselect to Data Retention Time (Note 1)	See waveform (Note 2)		0		ns
t_R	Operating Recovery Time (Note 1)			t_{RC}		ns

Notes: 1. Parameter not tested, guaranteed by design.
2. Waveforms shown are not actual and may vary in use.

SWITCHING CHARACTERISTICS over operating range unless otherwise specified (for APL Products, Group A, Subgroups 7, 8, 9 10, 11 are tested unless otherwise noted) (Note 1)

(Table 1 of 2)

No.	Parameter Symbols	Parameter Description	Am99C641/Am99CL641						Units	
			- 25		- 35		- 45			
			Min.	Max.	Min.	Max.	Min.	Max.		
READ CYCLES ONE AND TWO (Note 8)										
1	t _{ELQV}	t _{ACS}	Chip Enable Access Time		25		35		45	ns
2	t _{AVAV}	t _{RC}	Read Cycle Time	25		35		45		ns
3	t _{AVQV}	t _{AA}	Address Access Time		25		35		45	ns
4	t _{AXQX}	t _{OH}	Output Hold After Address	3		5		5		ns
5†	t _{ELQX}	t _{LZ}	Chip Enable to Output Active (Note 7)	3		5		5		ns
6†	t _{EHQZ}	t _{HZ}	Chip Disable to Output Disable (Note 7)		15		15		15	ns
7†	t _{ELICCH}	t _{PU}	Chip Enable to Power Up (Note 3)	0		0		0		ns
8†	t _{EHICCL}	t _{PD}	Chip Disable to Power Down (Note 3)	0	25	0	35	0	45	ns
WRITE CYCLES ONE AND TWO (Note 8)										
9	t _{AVAV}	t _{WC}	Write Cycle Time	25		35		45		ns
10	t _{WLWH}	t _{WP}	Write Pulse Width (Note 5)	20		25		25		ns
11	t _{ELWH}	t _{CW}	Chip Enable to End of Write (Note 5)	25		35		40		ns
12	t _{DVWH}	t _{DW}	Data Setup to End of Write	20		25		25		ns
13	t _{WHDX}	t _{DH}	Data Hold After End of Write	0		0		0		ns
14	t _{AVWH}	t _{AW}	Address Setup to End of Write (Note 5)	20		30		40		ns
15	t _{AVWL}	t _{AS}	Address Setup to Beginning of Write	0		0		0		ns
16	t _{WHAX}	t _{WR}	Address Hold After End of Write	0		0		0		ns
17†	t _{WLQZ}	t _{WZ}	Write Enable to Output Disable (Notes 6 & 7)	0	10	0	15	0	20	ns
18†	t _{WHQX}	t _{OW}	Output Active After End of Write (Notes 6 & 7)	0		0		0		ns

SWITCHING CHARACTERISTICS (Cont'd.)

(Table 2 of 2)

No.	Parameter Symbols		Parameter Description	Am99C641/Am99C641				Units
				-55		-70		
				Min.	Max.	Min.	Max.	
READ CYCLES ONE AND TWO (Note 8)								
1	t _{ELQV}	t _{ACS}	Chip Enable Access Time		55		70	ns
2	t _{AVAV}	t _{RC}	Read Cycle Time	55		70		ns
3	t _{AVQV}	t _{AA}	Address Access Time		55		70	ns
4	t _{AXQX}	t _{OH}	Output Hold After Address	5		5		ns
5†	t _{ELQX}	t _{LZ}	Chip Enable to Output Active (Note 7)	5		5		ns
6†	t _{EHQZ}	t _{HZ}	Chip Disable to Output Disable (Note 7)		20		20	ns
7†	t _{ELICCH}	t _{PU}	Chip Enable to Power Up (Note 3)	0		0		ns
8†	t _{EHICCL}	t _{PD}	Chip Disable to Power Down (Note 3)	0	55	0	70	ns
WRITE CYCLES ONE AND TWO (Note 8)								
9	t _{AVAV}	t _{WC}	Write Cycle Time	55		70		ns
10	t _{WLWH}	t _{WP}	Write Pulse Width (Note 5)	30		40		ns
11	t _{ELWH}	t _{CW}	Chip Enable to End of Write (Note 5)	50		55		ns
12	t _{DVWH}	t _{DW}	Data Setup to End of Write	30		30		ns
13	t _{WHDX}	t _{DH}	Data Hold After End of Write	0		0		ns
14	t _{AVWH}	t _{AW}	Address Setup to End of Write (Note 5)	50		55		ns
15	t _{AVWL}	t _{AS}	Address Setup to Beginning of Write	0		0		ns
16	t _{WHAX}	t _{WR}	Address Hold After End of Write		0		0	ns
17†	t _{WLQZ}	t _{WZ}	Write Enable to Output Disable (Notes 6 & 7)	0	25	0	30	ns
18†	t _{WHQX}	t _{OW}	Output Active After End of Write (Notes 6 & 7)	0		0		ns

† Not included in Group A tests.

Notes:


1. Absolute Maximum Ratings are intended for user guidelines and are not tested.
2. For test and correlation purposes, ambient temperature is defined as the stabilized case temperature.
3. Parameter not tested—guaranteed by characterization.
4. Test conditions assume signal transition times of 5 ns or less, timing reference levels of 1.5 V, input-pulse levels of 0 to 3.0 V, and output loading of specified I_{OL}/I_{OH} and 30-pF load capacitance. Output timing reference is 1.5 V (see Test Load A in Switching Test Circuits section).
5. The internal write time of the memory is defined by the overlap of $\overline{CE}$ active and $\overline{WE}$ LOW. Both signals must be active to initiate a write and either signal can terminate a write by going inactive. The data input setup and hold timing should be referenced to the transition edge that terminates the write.
6. The minimum limit is not tested and is included for design information only.
7. Parameter not tested, guaranteed by characterization using the load shown in Test Load B—Switching Test Circuits. Transition is measured ± 500 mV from steady state voltage.
8. Address input rise and fall times must not exceed 1 μ s when $\overline{CE}$ is active. The limit is not tested and is intended for design information only.
9. Undershoot to -3.0 V for a duration of 10 ns between the 50% amplitude point is permissible.

SWITCHING WAVEFORMS

KEY TO SWITCHING WAVEFORMS


WAVEFORM	INPUTS	OUTPUTS
	MUST BE STEADY	WILL BE STEADY
	MAY CHANGE FROM H TO L	WILL BE CHANGING FROM H TO L
	MAY CHANGE FROM L TO H	WILL BE CHANGING FROM L TO H
	DON'T CARE; ANY CHANGE PERMITTED	CHANGING; STATE UNKNOWN
	DOES NOT APPLY	CENTER LINE IS HIGH IMPEDANCE "OFF" STATE

KS000010

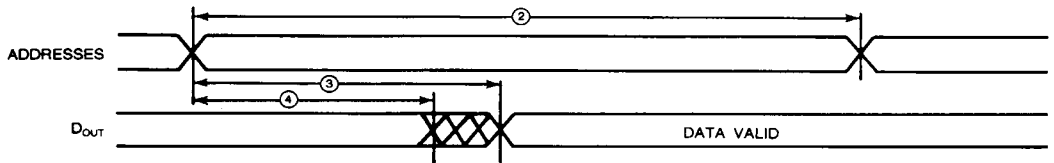

WF021460


Read Cycle One

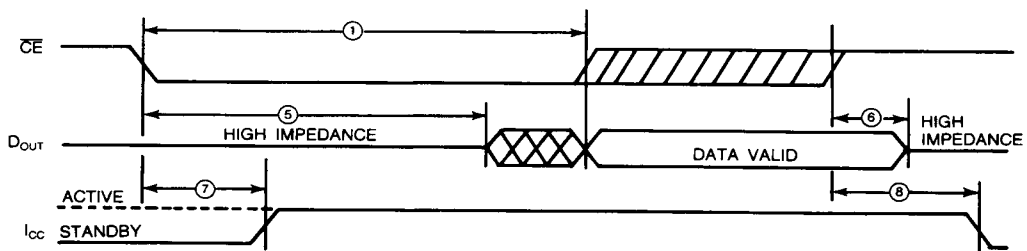

WF021470


Read Cycle Two

SWITCHING WAVEFORMS (Cont'd.)

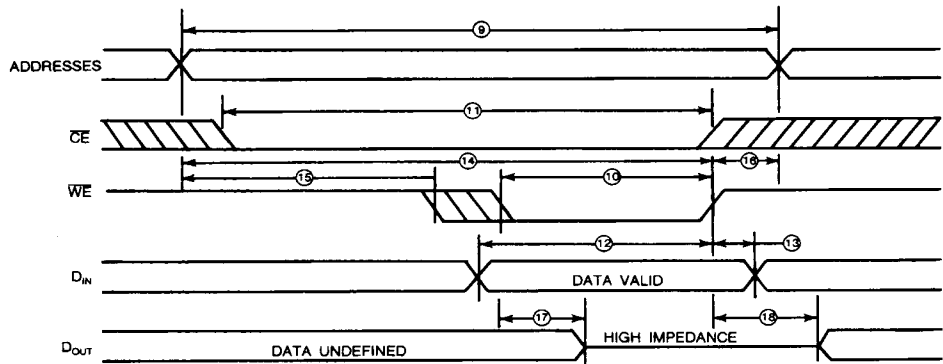

WF021440






Write Cycle One

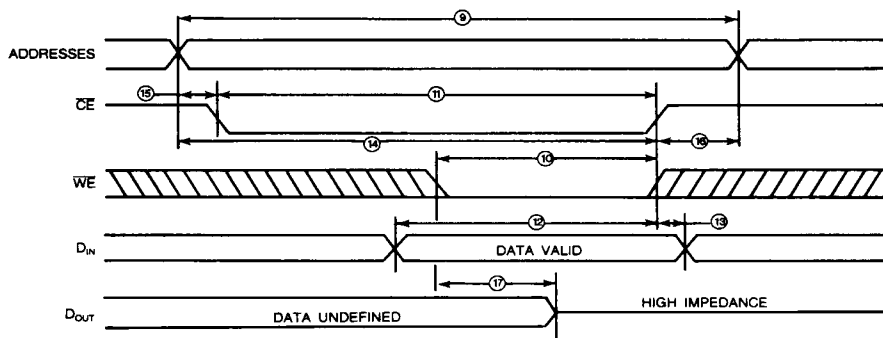

WF021453


Write Cycle Two

TYPICAL PERFORMANCE CURVES

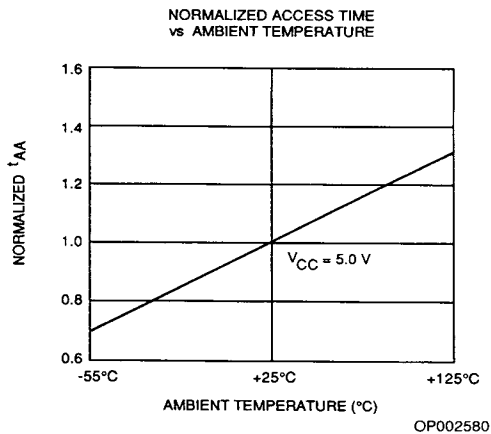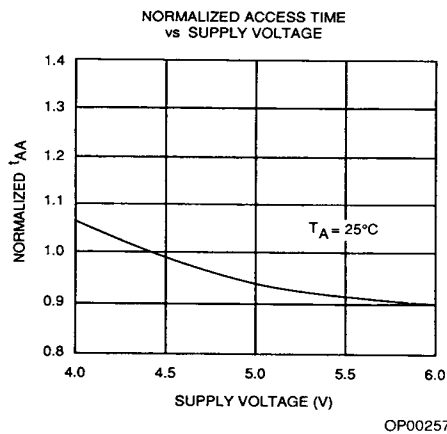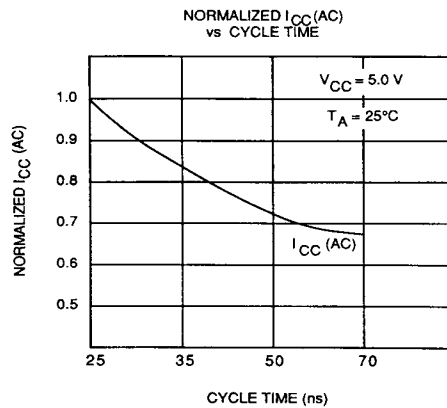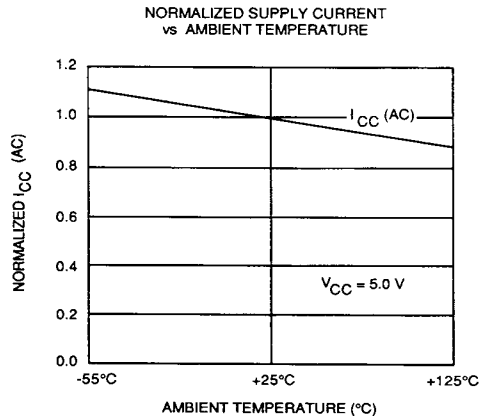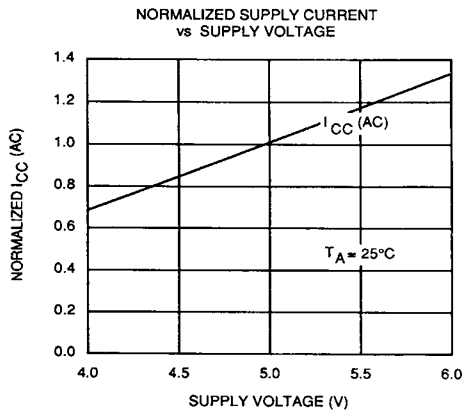


PHYSICAL DIMENSIONS*

PD3022

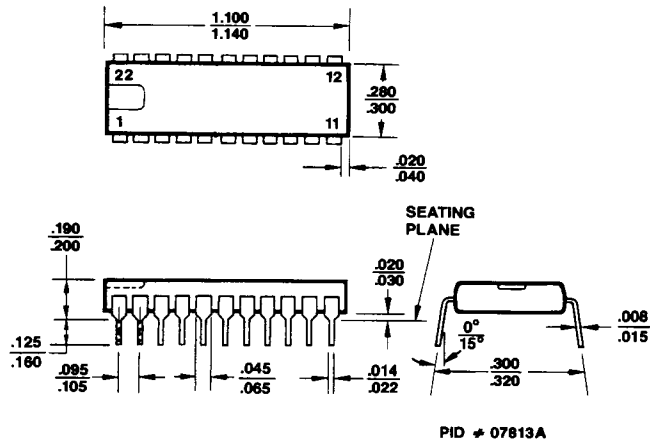


CD3022

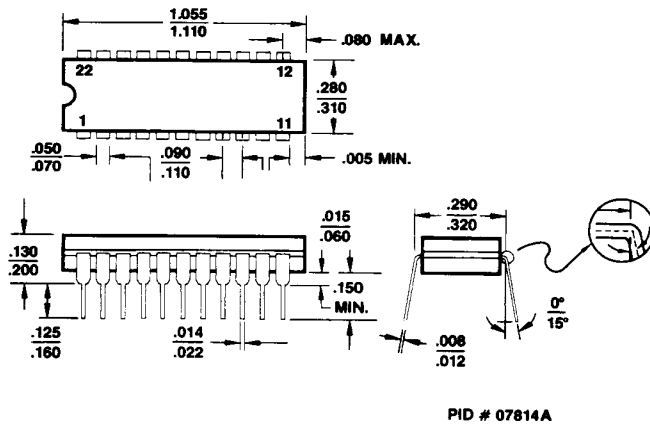

*For reference only.

PHYSICAL DIMENSIONS (Cont'd.)

CLR022*

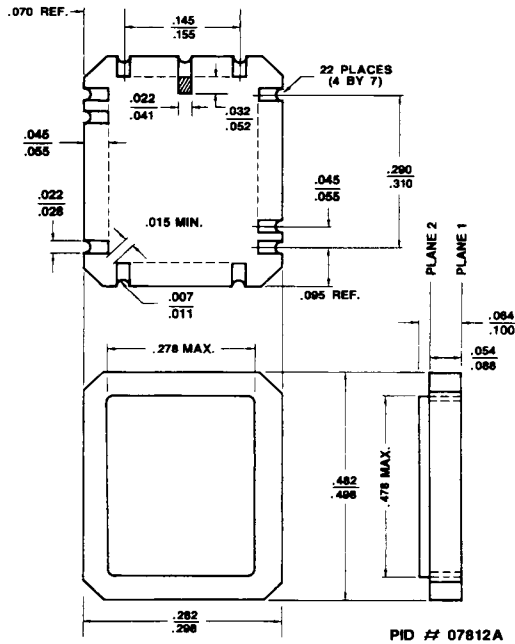

*Preliminary. Subject to Change.

ADVANCED MICRO DEVICES DOMESTIC SALES OFFICES

ALABAMA (205) 882-9122
ARIZONA, (602) 242-4400
 Tempe
CALIFORNIA,
 Culver City (213) 645-1524
 Newport Beach (714) 752-6262
 San Diego (619) 560-7030
 Santa Clara (408) 727-3270
 Woodland Hills (818) 992-4155
COLORADO (303) 741-2900
CONNECTICUT (203) 264-7800
FLORIDA,
 Clearwater (813) 530-9971
 Ft. Lauderdale (305) 484-8600
 Melbourne (305) 729-0496
 Orlando (305) 859-0831
GEORGIA (404) 449-7920
ILLINOIS (312) 773-4422
INDIANA (317) 244-7207
KANSAS (913) 451-3115
MARYLAND (301) 796-9310

MASSACHUSETTS (617) 273-3970
MINNESOTA (612) 938-0001
MISSOURI (314) 275-4415
NEW JERSEY (201) 299-0002
NEW YORK,
 Liverpool (315) 457-5400
 Poughkeepsie (914) 471-8180
 Woodbury (516) 364-8020
NORTH CAROLINA, (919) 847-8471
OREGON (503) 245-0080
OHIO (614) 891-6455
PENNSYLVANIA,
 Allentown (215) 398-8006
 Willow Grove (215) 657-3101
TEXAS,
 Austin (512) 346-7830
 Dallas (214) 934-9099
 Houston (713) 785-9001
WASHINGTON (206) 455-3600
WISCONSIN (414) 782-7748

INTERNATIONAL SALES OFFICES

BELGIUM,
 Bruxelles TEL: (02) 771 99 93
 FAX: (02) 762-3716
 TLX: 61028
CANADA, Ontario,
 Kanata TEL: (613) 592-0090
 Willowdale TEL: (416) 224-5193
 FAX: (416) 224-0056
FRANCE,
 Paris TEL: (01) 45 60 00 55
 FAX: (01) 46 86 21 85
 TLX: 202053F
GERMANY,
 Hannover area TEL: (05143) 50 55
 FAX: (05143) 55 53
 TLX: 925287
 München TEL: (089) 41 14-0
 FAX: (089) 406490
 TLX: 523883
 Stuttgart TEL: (0711) 62 33 77
 FAX: (0711) 625187
 TLX: 721882
HONG KONG,
 Kowloon TEL: 3-695377
 FAX: 1234276
 TLX: 50426

ITALY, Milano TEL: (02) 3390541
 FAX: (02) 3498000
 TLX: 315286
JAPAN,
 Tokyo TEL: (03) 345-8241
 FAX: 3425196
 TLX: J24064 AMDTKOJ
 Osaka TEL: 06-243-3250
 FAX: 06-243-3253
KOREA, Seoul TEL: 82-733-1021/7
 FAX: 82-733-1028
 TLX: K22652
LATIN AMERICA,
 Ft. Lauderdale, TEL: (305) 484-8600
 FAX: (305) 485-9736
 TLX: 5109554261 AMDFTL
SWEDEN, Stockholm TEL: (08) 733 03 50
 FAX: (08) 733 22 85
 TLX: 11602
UNITED KINGDOM,
 Manchester area TEL: (0925) 828008
 FAX: (0925) 827693
 TLX: 628524
 London area TEL: (04862) 22121
 FAX: (04862) 22179
 TLX: 859103

NORTH AMERICAN REPRESENTATIVES

CALIFORNIA
 I² INC OEM (408) 988-3400
 DISTI (408) 496-6868
IDAHO
 INTERMOUNTAIN TECH MKGT (208) 888-6071
INDIANA
 ELECTRONIC MARKETING CONSULTANTS,
 INC (317) 253-1668
IOWA
 LORENZ SALES (319) 377-4666
KANSAS
 LORENZ SALES (913) 384-6556
MICHIGAN
 SAI MARKETING CORP (313) 750-1922
MISSOURI
 LORENZ SALES (314) 997-4558

NEBRASKA
 LORENZ SALES (402) 475-4660
NEW MEXICO
 THORSON DESERT STATES (505) 293-8555
NEW YORK
 NYCOM, INC (315) 437-8343
OHIO
 Dayton
 DOLFUSS ROOT & CO (513) 433-6776
 Strongsville
 DOLFUSS ROOT & CO (216) 238-0300
PENNSYLVANIA
 DOLFUSS ROOT & CO (412) 221-4420
UTAH
 R² MARKETING (801) 595-0631

Advanced Micro Devices reserves the right to make changes in its product without notice in order to improve design or performance characteristics. The performance characteristics listed in this document are guaranteed by specific tests, correlated testing, guard banding, design and other practices common to the industry. For specific testing details, contact your local AMD sales representative. The company assumes no responsibility for the use of any circuits described herein.

 **ADVANCED MICRO DEVICES** 901 Thompson Pl., P.O. Box 3453, Sunnyvale, CA 94088, USA
TEL: (408) 732-2400 • TWX: 910-339-9280 • TELEX: 34-6306 • TOLL FREE: (800) 538-8450

© 1987 Advanced Micro Devices, Inc.
Printed in U.S.A. AIS-WCP-10M-7/87-0