

SERIES 45L(R), 150K/ KS(R)

STANDARD RECOVERY DIODES

Stud Version

Features

- Alloy diode
- High current carrying capability
- High surge current capabilities
- Stud cathode and stud anode version



150A

Typical Applications

- Battery charges
- Welders
- Machine tool controls
- High power drives
- Medium traction applications
- Freewheeling diodes

Major Ratings and Characteristics

Parameters	45L /150K	Units
$I_{F(AV)}$	150	A
$@ T_C$	150	°C
$I_{F(RMS)}$	235	A
I_{FSM}	@ 50Hz 3570	A
	@ 60Hz 3740	A
I^2t	@ 50Hz 64	KA ² s
	@ 60Hz 58	KA ² s
V_{RRM} range	100 to 600	V
T_J	- 40 to 200	°C

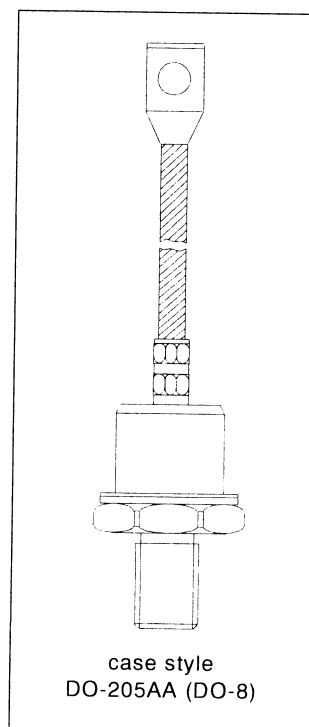

ELECTRICAL SPECIFICATIONS

Voltage Ratings

Type number	Voltage Code	V_{RRM} , maximum repetitive peak reverse voltage V	V_{RSM} , maximum non-repetitive peak rev. voltage V	I_{RRM} max. @ $T_J = 175^\circ\text{C}$ mA
45L(R) 150K(R) 150KS(R)	10	100	200	35
	20	200	300	
	30	300	400	
	40	400	500	
	60	600	720	

Forward Conduction

Parameter	45L /150K	Units	Conditions
$I_{F(AV)}$ Max. average forward current @ Case temperature	150 150	A $^\circ\text{C}$	180° conduction, half sine wave
$I_{F(RMS)}$ Max. RMS forward current	235	A	DC @ 142°C case temperature
I_{FSM} Max. peak, one-cycle forward, non-repetitive surge current	3570 3740 3000 3140	A	$t = 10\text{ms}$ No voltage $t = 8.3\text{ms}$ reapplied $t = 10\text{ms}$ 100% V_{RRM} $t = 8.3\text{ms}$ reapplied Sinusoidal half wave, Initial $T_J = T_J \text{ max.}$
I^2t Maximum I^2t for fusing	64 58 45 41	KA^2s	$t = 10\text{ms}$ No voltage $t = 8.3\text{ms}$ reapplied $t = 10\text{ms}$ 100% V_{RRM} $t = 8.3\text{ms}$ reapplied

Thermal and Mechanical Specifications

Parameter			45L /150K	Units	Conditions
T _J	Max. junction operating temperature range		-40 to 200	°C	
T _{stg}	Max. storage temperature range		-40 to 200		
R _{thJC}	Max. thermal resistance, junction to case		0.25	K/W	DC operation
R _{thCS}	Max. thermal resistance, case to heatsink		0.10		Mounting surface, smooth, flat and greased
T	Mounting torque 45L	Min.	14.1 (125)	Nm (lbf-in)	Not lubricated threads
		Max.	17.0 (150)		
		Min.	12.2 (108)		Lubricated threads
		Max.	15.0 (132)		
	150K 150KS	Min.	11.3 (100)	Nm (lbf-in)	Not lubricated threads
		Max.	14.1 (125)		
		Min.	9.5 (85)		Lubricated threads
		Max.	12.5 (110)		
wt	Approximate weight		100 (3.5)	g (oz)	
Case style	45L	DO-205AC (DO-30)		See Outline Table	
	150K-A	DO-205AA (DO-8)			
	150KS	B-42			

ΔR_{thJC} Conduction

(The following table shows the increment of thermal resistance R_{thJC} when devices operate at different conduction angles than DC)

Conduction angle	Sinusoidal conduction	Rectangular conduction	Units	Conditions
180°	0.031	0.023	K/W	$T_J = T_{J \text{ max.}}$
120°	0.038	0.040		
90°	0.048	0.053		
60°	0.071	0.075		
30°	0.120	0.121		

Ordering Information Table

Device Code

45

L

R

60

1

2

3

4

1

 - 45 = Standard version

2

 - L = Essential Part Number

3

 - R = Stud Reverse Polarity (Anode to Stud)
None = Stud Normal Polarity (Cathode to Stud)

4

 - Voltage code: Code x 10 = V_{RRM} (See Voltage Ratings table)

Ordering Information Table

Device Code

15

0

K

R

60

A

1

2

3

4

5

6

1

 - 15 = Essential Part Number

2

 - 0 = Standard Device

3

 - Case Style
K = DO205AA (DO-8)
KS = B-42

4

 - R = Stud Reverse Polarity (Anode to Stud)
None = Stud Normal Polarity (Cathode to Stud)


5

 - Voltage code: Code x 10 = V_{RRM} (See Voltage Ratings table)

6

 - A = Essential Part Number for 150K (Omitted for 150KS)

Outline Table

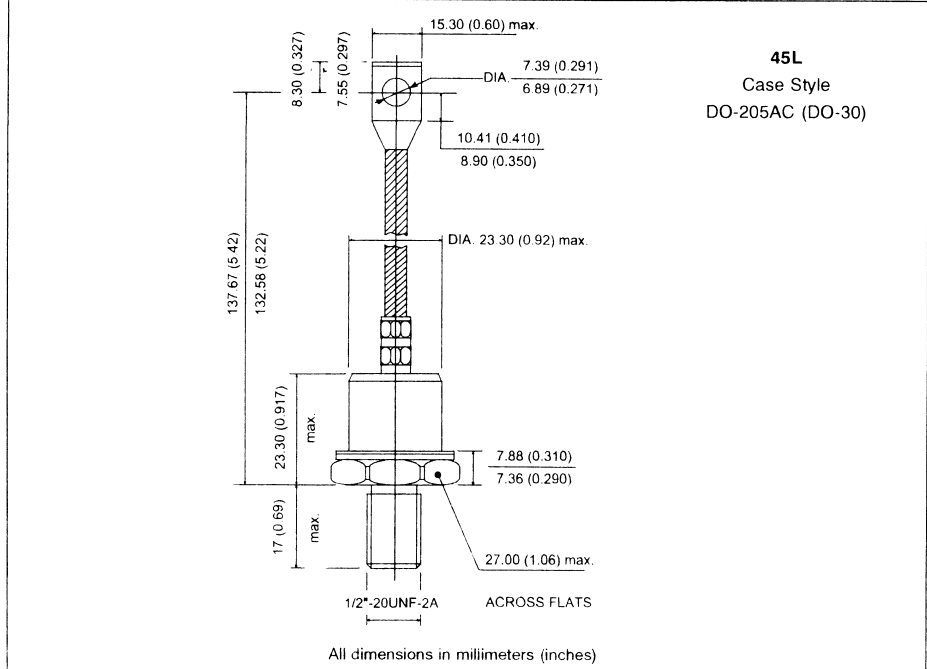

Outline Table

