


32-Bit BusSwitch/Exchange

Product Features:

- Near-zero propagation delay
- Low noise, 25ohm version (PI5C32383)
- 5ohm switches connect inputs to outputs (PI5C3383)
- Direct bus connection when switches are ON
- Ultra-low quiescent power (0.2 μ A typical) – Ideally suited for notebook applications
- Packages available:
–80-pin 150-mil wide plastic BQSOP (B)

Logic Block Diagram

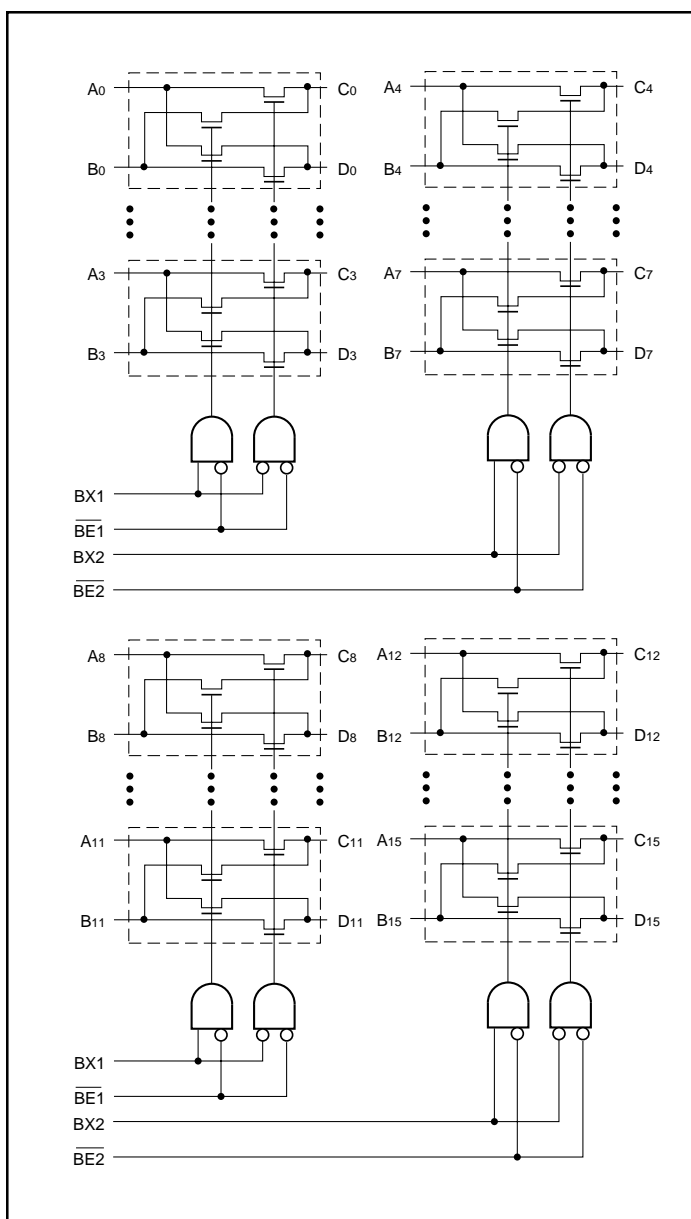

Product Description:

Pericom Semiconductor's PI5C series of logic circuits are produced in the Company's advanced submicron CMOS technology, achieving industry leading performance.

The PI5C34X383 and PI5C34X2383 are 32-bit bus switches with exchange designed with a low ON resistance allowing inputs to be connected directly to outputs. The bus switch creates no additional propagational delay or additional ground bounce noise. The switches are turned ON by the Bus Enable (\overline{BE}) input signal, and the Bus Exchange (BX) input signal offers nibble swapping of the AB and CD pairs of signals. This exchange configuration allows byte swapping of buses in systems. It can also be used as a quad 2-to-1 multiplexer and to create low delay barrel shifters, etc. The PI5C34X2383 is designed with an internal 25ohm resistor reducing noise reflection in high-speed applications.

Applications:

16-wide 2:1 MUX, Byte Swapping, and Hot Insertion.

Truth Table⁽¹⁾

Function	\overline{BE}_N	BX _n	A0-A15	B0-B15
Disconnect	H	X	Hi-Z	Hi-Z
Connect	L	L	C0-C15	D0-D15
Exchange	L	H	D0-D15	C0-C15

Note: 1. H = High Voltage Level, X = Don't Care,
L = Low Voltage Level, Hi-Z = High Impedance

Product Pin Configuration

BE1	1	80	Vcc
C0	2	79	D3
A0	3	78	B3
B0	4	77	A3
D0	5	76	C3
C1	6	75	D2
A1	7	74	B2
B1	8	73	A2
D1	9	72	C2
GND	10	71	BX1
BE2	11	70	Vcc
C4	12	69	D7
A4	13	68	B7
B4	14	67	A7
D4	15	66	C7
C5	16	65	D6
A5	17	64	B6
B5	18	63	A6
D5	19	62	C6
GND	20	61	BX2
BE3	21	60	Vcc
C8	22	59	D11
A8	23	58	B11
B8	24	57	A11
D8	25	56	C11
C9	26	55	D10
A9	27	54	B10
B9	28	53	A10
D9	29	52	C10
GND	30	51	BX3
BE4	31	50	Vcc
C12	32	49	D15
A12	33	48	B15
B12	34	47	A15
D12	35	46	C15
C13	36	45	D14
A13	37	44	B14
B13	38	43	A14
D13	39	42	C14
GND	40	41	BX4

**80-Pin
B80**

Product Pin Description

Pin Name	Description
$\overline{B}En$	Bus Enable Input (Active LOW)
BXn	Bus Exchange Input
Ax	Bus A
Bx	Bus B
Cx	Bus C
Dx	Bus D
GND	Ground
Vcc	Power

Maximum Ratings

(Above which the useful life may be impaired. For user guidelines, not tested.)

Storage Temperature	-65°C to +150°C
Ambient Temperature with Power Applied	-40°C to +85°C
Supply Voltage to Ground Potential (Inputs & Vcc Only)	-0.5V to +7.0V
Supply Voltage to Ground Potential (Outputs & D/O Only)	-0.5V to +7.0V
DC Input Voltage	-0.5V to +7.0V
DC Output Current	120 mA
Power Dissipation	0.5W

Note:

Stresses greater than those listed under MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

DC Electrical Characteristics (Over the Operating Range, TA = -40°C to +85°C, VCC = 5V ±5%)

Parameters	Description	Test Conditions ⁽¹⁾	Min.	Typ ⁽²⁾	Max.	Units
V _{IH}	Input HIGH Voltage	Guaranteed Logic HIGH Level	2.0	—	—	V
V _{IL}	Input LOW Voltage	Guaranteed Logic LOW Level	-0.5	—	0.8	V
I _{IH}	Input HIGH Current	V _{CC} = Max., V _{IN} = V _{CC}	—	—	±1	μA
I _{IL}	Input LOW Current	V _{CC} = Max., V _{IN} = GND	—	—	±1	μA
I _{OZH}	High Impedance Output Current	0 - AB, CD - V _{CC}	—	—	±1	μA
V _{IK}	Clamp Diode Voltage	V _{CC} = Min., I _{IN} = -18 mA	—	-0.7	-1.2	V
I _{OS}	Short Circuit Current ⁽³⁾	AB (CD) = 0V, CD (AB) = V _{CC}	100	—	—	mA
V _H	Input Hysteresis at Control Pins		—	150	—	mV
R _{ON}	Switch On Resistance ⁽⁴⁾	V _{CC} = Min., V _{IN} = 0.0V, I _{ON} = 48 mA	—	5	7	ohm
		PI5C3383	18	28	40	
		PI5C32383	—	10	15	ohm
		V _{CC} = Min., V _{IN} = 2.4V, I _{ON} = 15 mA	18	35	48	

Capacitance (TA = 25°C, f = 1 MHz)

Parameters ⁽⁵⁾	Description	Test Conditions	Typ	Max.	Units
C _{IN}	Input Capacitance	V _{IN} = 0V	—	6	pF
C _{OFF}	AB/CD Capacitance, Switch Off	V _{IN} = 0V	—	6	pF
C _{ON}	AB/CD Capacitance, Switch On	V _{IN} = 0V	—	8	pF

Notes:

1. For Max. or Min. conditions, use appropriate value specified under Electrical Characteristics for the applicable device type.
2. Typical values are at V_{CC} = 5.0V, TA = 25°C ambient and maximum loading.
3. Not more than one output should be shorted at one time. Duration of the test should not exceed one second.
4. Measured by the voltage drop between AB and CD pin at indicated current through the switch. ON resistance is determined by the lower of the voltages on the two (A or B, C or D) pins.
5. This parameter is determined by device characterization but is not production tested.

Power Supply Characteristics

Parameters	Description	Test Conditions ⁽¹⁾		Min.	Typ ⁽²⁾	Max.	Units
I _{CC}	Quiescent Power Supply Current	V _{CC} = Max.	V _{IN} = GND or V _{CC}	—	0.1	3.0	μA
ΔI _{CC}	Supply Current per Input @ TTL HIGH	V _{CC} = Max.	V _{IN} = 3.4V ⁽³⁾	—	—	2.5	mA
I _{CCD}	Supply Current per Input per MHz ⁽⁴⁾	V _{CC} = Max., AB and CD Pins Open BE = GND Control Input Toggling 50% Duty Cycle		—	—	0.25	mA/ MHz

Notes:

- For conditions shown as Max. or Min., use appropriate value specified under Electrical Characteristics for the applicable device.
- Typical values are at V_{CC} = 5.0V, +25°C ambient.
- Per TTL driven input (V_{IN} = 3.4V, control inputs only); A, B, C, and D pins do not contribute to I_{CC}.
- This current applies to the control inputs only and represent the current required to switch internal capacitance at the specified frequency. The A, B, C, and D inputs generate no significant AC or DC currents as they transition. This parameter is not tested, but is guaranteed by design.

PI5C34X383 Switching Characteristics over Operating Range

Parameters	Description	Conditions ⁽¹⁾	PI5C34X383			Unit
			Com			
			Min	Typ	Max	
t _{PLH} t _{PHL}	Propagation Delay ^(2,3) Ax to Cx, Bx to Dx	CL = 50 pF RL = 500ohm	—	0.25	—	ns
t _{PZH} t _{PZL}	Bus Enable Time BE to Cx or Dx		1.5	—	6.5	ns
t _{PHZ} t _{PLZ}	Bus Disable Time BE to Cx or Dx		1.5	—	5.5	ns
t _{BX}	Bus Exchange Time BX to Cx or Dx		1.5	—	6.5	ns

Notes:

- See test circuit and waveforms.
- This parameter is guaranteed but not tested on Propagation Delays.
- The bus switch contributes no propagational delay other than the RC delay of the ON resistance of the switch and the load capacitance. The time constant for the switch alone is of the order of 0.25 ns for 50 pF load. Since this time constant is much smaller than the rise/fall times of typical driving signals, it adds very little propagational delay to the system. Propagational delay of the bus switch when used in a system is determined by the driving circuit on the driving side of the switch and its interaction with the load on the driven side.

PI5C34X2383 Switching Characteristics over Operating Range

Parameters	Description	Conditions ⁽¹⁾	PI5C34X2383			Unit
			Com			
			Min	Typ	Max	
tPLH tPHL	Propagation Delay ^(2,3) Ax to Cx, Bx to Dx	CL = 50 pF RL = 500ohm	—	1.25	—	ns
tpZH tpZL	Bus Enable Time BE to Cx or Dx		1.5	—	6.5	ns
tpHZ tplZ	Bus Disable Time BE to Cx or Dx		1.5	—	5.5	ns
tbX	Bus Exchange Time BX to Cx or Dx		1.5	—	6.5	ns

Notes:

1. See test circuit and waveforms.
2. This parameter is guaranteed but not tested on Propagation Delays.
3. The bus switch contributes no propagational delay other than the RC delay of the ON resistance of the switch and the load capacitance. The time constant for the switch alone is of the order of 0.25 ns for 50 pF load. Since this time constant is much smaller than the rise/fall times of typical driving signals, it adds very little propagational delay to the system. Propagational delay of the bus switch when used in a system is determined by the driving circuit on the driving side of the switch and its interaction with the load on the driven side.