
PF0310

MOS FET Power Amplifier Module for VHF Band

HITACHI

ADE-208-103B (Z)

3rd Edition

July 1996

Application


VHF Band 136 to 150 MHz

Features

- Small package: $30 \times 10 \times 5.9$ mm
- High efficiency: 55% Typ
- Low power control current: 0.5 mA Max

Pin Arrangement


• RF-J



1: Pin
2: V_{PC}
3: V_{DD}
4: Pout
5: GND (Flange)

PF0310

Internal Diagram and External Circuit

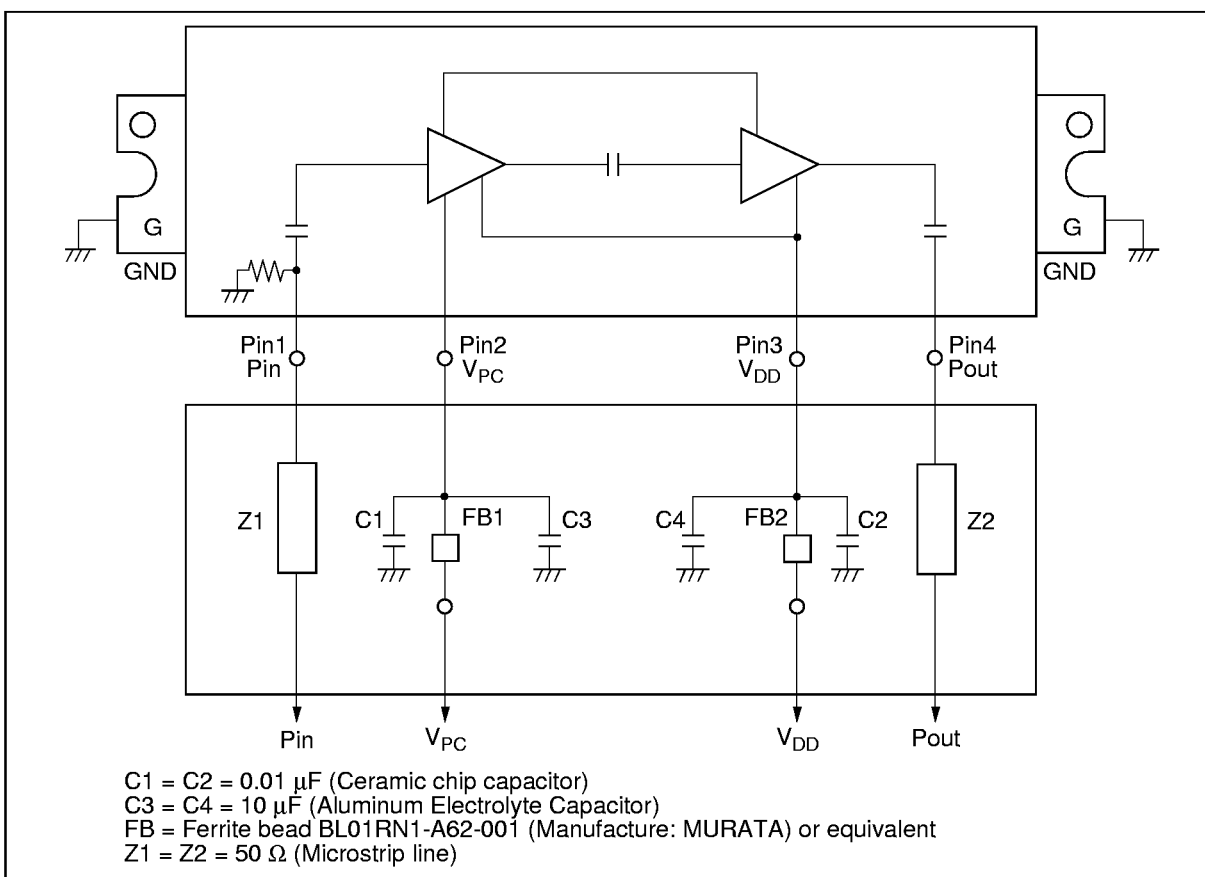


Absolute Maximum Ratings ($T_c = 25^\circ\text{C}$)

Item	Symbol	Rating	Unit
Supply voltage	V_{DD}	17	V
Supply current	I_{DD}	3	A
PC voltage	V_{PC}	7	V
Input power	Pin	100	mW
Operating case temperature	T_c (op)	-30 to +100	$^\circ\text{C}$
Storage temperature	T_{stg}	-40 to +110	$^\circ\text{C}$

Electrical Characteristics (Tc = 25°C)


Item	Symbol	Min	Typ	Max	Unit	Test Condition
Frequency range	f	136	—	150	MHz	—
Drain cutoff current	I_{DS}	—	—	100	μA	$V_{DD} = 17 V$, $V_{PC} = 0 V$, $R_L = R_g = 50 \Omega$
Total efficiency	η_T	45	55	—	%	Pin = 20 mW, $V_{DD} = 9.6 V$, Pout = 7 W (at V_{APC} controlled), $R_L = R_g = 50 \Omega$, Tc = 25°C
2nd harmonic distortion	2nd H.D.	—	-25	-20	dBc	
3rd harmonic distortion	3rd H.D.	—	-35	-30	dBc	
4th harmonic distortion	4th H.D.	—	-40	-30	dBc	
Input VSWR	VSWR (in)	—	1.5	3	—	
Output power (1)	Pout (1)	7	8	—	W	Pin = 20 mW, $V_{DD} = 9.6 V$, $V_{PC} = 6 V$, $R_L = R_g = 50 \Omega$
Output power (2)	Pout (2)	2.5	3	—	W	Pin = 20 mW, $V_{DD} = 6 V$, $V_{PC} = 5.5 V$, $R_L = R_g = 50 \Omega$
Load VSWR tolerance	—	No degradation			—	Pin = 20 mW, $V_{DD} = 15 V$, Pout $\leq 7 W$, (V_{PC} controlled), Output VSWR = 6:1 All phases
Stability	—	No parasitic oscillation			—	Pin = 20 mW, $V_{DD} = 6$ to 15 V, Pout $\leq 7 W$, (V_{PC} controlled), Output VSWR = 3:1 All phases

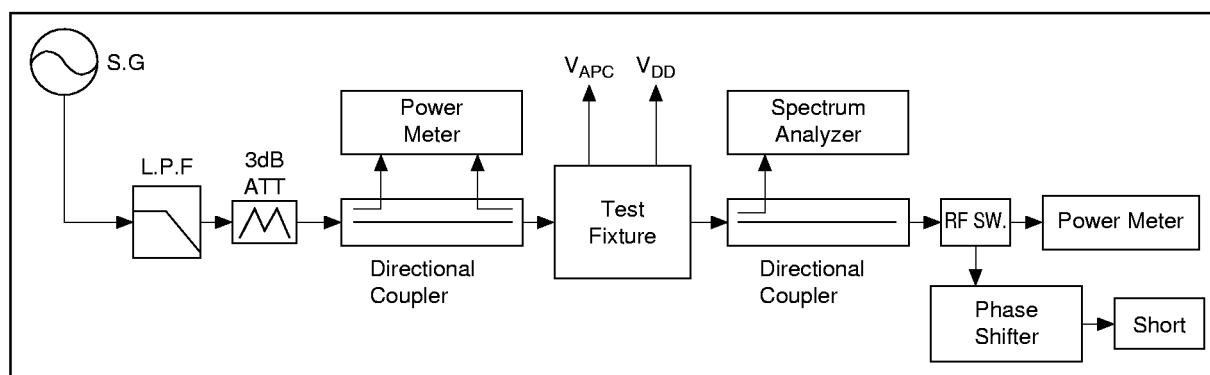Test System Diagram


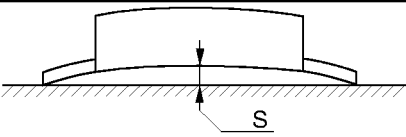
PF0310

Test Fixture Pattern

Unit: mm

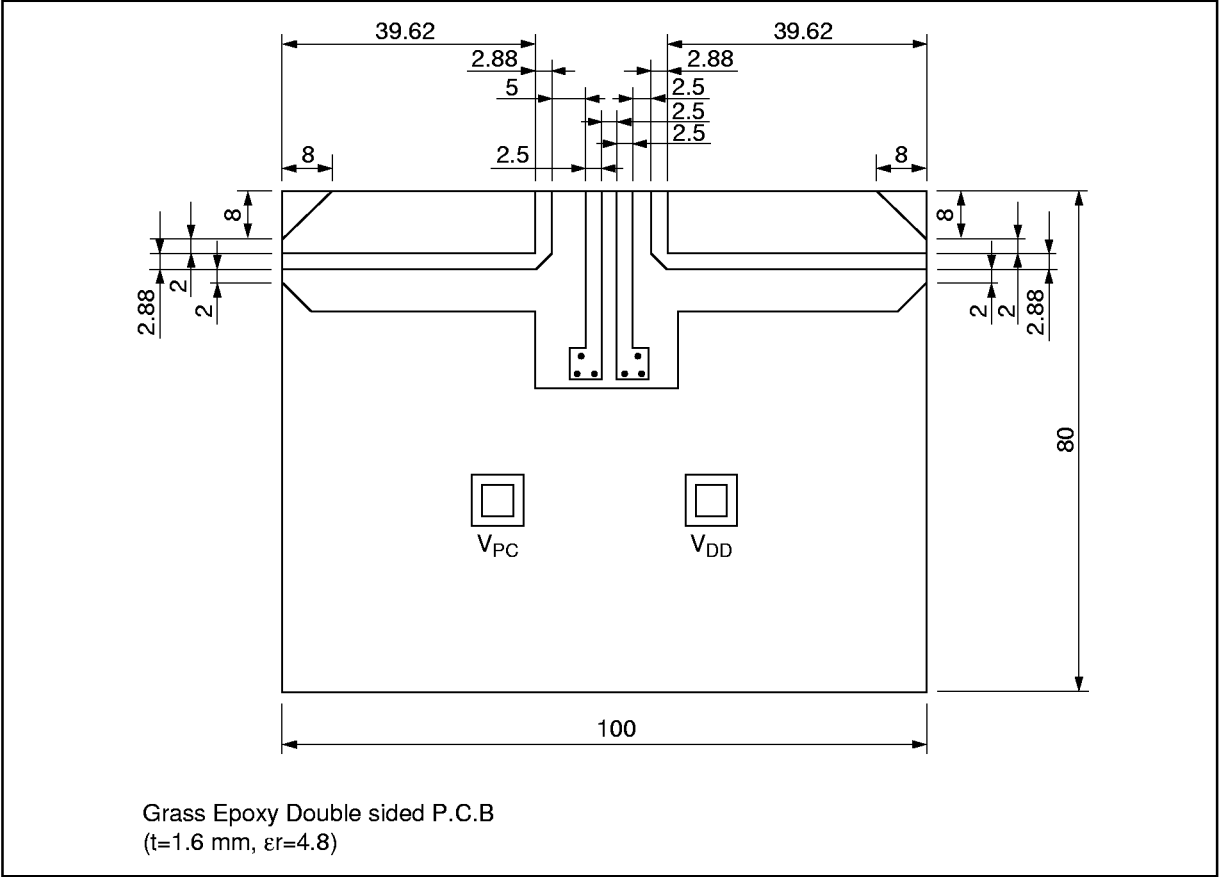

Mechanical Characteristics

Item	Measuring Conditions	Spec
Torque for screw up the heatsink flange	M2.6 Screw Bolts	1.5 to 3.5 kg•cm
Warp size of the heatsink flange: S		S = 0 +0.1/-0 mm

Note for Use

- Unevenness and distortion at the surface of the heatsink attached module should be less than 0.05 mm.
- It should not be existed any dust between module and heatsink.
- Torque for screw up the heatsink flange should be 1.5 to 3.5 kg · cm with M2.6 screw bolts.
- Don't solder the flange directly.
- Soldering temperature and soldering time should be less than 230°C, 10 sec.
(Soldering position spaced from the root point of the lead frame: 2 mm).
- It should not be given mechanical and thermal stress to lead and flange of the module.
- To protect devices from electro-static damage, soldering iron, measuring-equipment and human body etc. should be grounded.
- Don't washing the module except lead pins.
- When the external parts (Isolator, Duplexer, etc.) of the module are changed, the electrical characteristics should be evaluated enough.
- To get good stability, ground impedance between the module GND flange and PCB GND pattern should be designed as low as possible.

Characteristic Curves

