

### Surface Mount, Dual, 2000 Vrms



- Meets pulse waveform template of CCITT I.430 when recommended transformer and chip pair are used
- Excellent longitudinal balance
- 2 KVrms isolation voltage
- Available in tape and reel, tray or tube packaging Recognized by BABT and UL


	Electrical Specifications @ 25°C — Operating Temperature 0°C to 70°C													
Part		t <b>io <sup>A</sup></b> 2%)	OCL Pri <sup>B</sup> (mH MIN)		Sec MAX)	C <sub>W/w</sub> (pF MAX)	<b>CD</b> (pF N		DCF (Ω ±2		DCR (Ω ±2		Δ Inc c	Package/
Number	Α	В	A&B	Α	В	A&B	Α	В	Α	В	Α	В	(mA MAX)	Schematic
PE-65792	1:1	1:2	22	5	15	100	42	80	2.4	2.3	2.4	4.0	1	SC-1
PE-65793	1:1	1:1	22	5	5	100	42	42	2.4	2.4	2.4	2.4	1	SC-1
PE-65795	1:2	1:2	22	15	15	100	80	80	2.5	2.5	4.3	4.3	1	SC-1
PE-65798	1:2.5	1:2.5	22	8-40	8-40	100	110	110	2.5	2.5	5.8	5.8	1	SC-1
PE-65799	1:2	1:2	22	11	11	100	180	180	2.4	2.4	4.4	4.4	1	SC-1


NOTE: For low profile version of products listed above, refer to data sheet T613.


(See Pages 4 and 5 for Table Notes)

#### **Mechanical**

#### **Schematic**

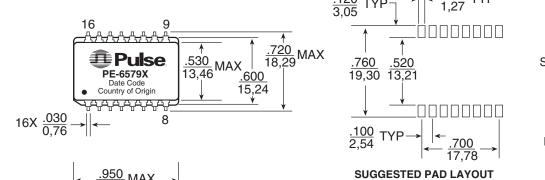

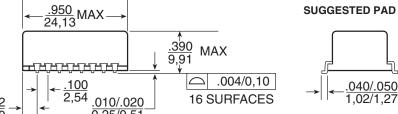



SC-1

Unless otherwise specified all tolerances are  $\pm \frac{.010}{0.25}$ 

See page 4 for packaging information.

Through Hole, Single, 2000 Vrms





- Meets the pulse waveform template of CCITT I.430 when recommended transformer and chip pair are used
- Excellent longitudinal balance
- 2 KVrms or higher voltage isolation
- Recognized by BABT and UL


### Electrical Specifications @ 25°C — Operating Temperature 0°C to 70°C


<b>2KV</b> ISOLATION.	THROUGH	HOLE, SINGLE	<b>TRANSFORMERS</b>
-----------------------	---------	--------------	---------------------

Part Number	Ratio <sup>A</sup> (±2%)	OCL Pri (mH MIN)	<b>L</b> L <b>Sec</b> (μΗ MAX)	Cw/w (pF MAX)	CD Pri (pF MAX)	DCR Pri (Ω ±25%)	<b>DCR Sec</b> (Ω ±25%)	Isolation (Vrms MIN)	Δ Ioc <sup>c</sup> (mA MAX)	Package/ Schematic
PE-64993	1CT:1CT	22	5	100	42	2.4	2.4	2000	1	IS-1
PE-64994	1CT:1.8CS	22	15	100	160	2.5	4.2	2000	1	IS-2
PE-64995	1CT:2CT	22	15	100	80	2.5	4.3	2000	1	IS-1
PE-64996	1CT:2.5CS	22	30	100	150	2.5	5.8	2000	1	IS-2
PE-64998	1CS:2.5CS	22	15-40	100	110	2.5	5.8	2000	1	IS-3
PE-64999	1CT:2CT	22	11	100	180	2.4	4.4	2000	1	IS-1

(See Pages 4 and 5 for Table Notes)



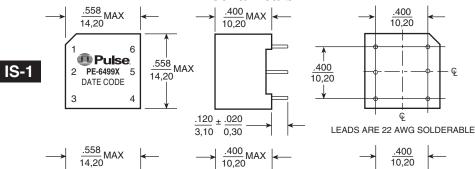

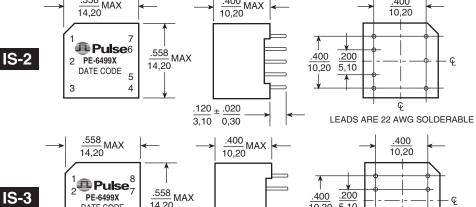

.120 ± .020

0,30 3.10

Dimensions: Inches Unless otherwise specified, all tolerances are  $\pm \frac{.010}{0.25}$ 


14,20

PE-6499X


DATE CODE

**IS-3** 


### **Schematics**



See page 4 for packaging information.



See page 4 for packaging information.



See page 4 for packaging information.

LEADS ARE 22 AWG SOLDERABLE

.400

10,20  $\overline{5,10}$ 



### **Dual and Single Through Hole**


	Electrical Specifications @ 25°C — Operating Temperature 0°C to 70°C												
Part		COI	LA			CO	IL B		Package/				
Number	Ratio <sup>A</sup>	Equivalent Single	Primary Pins	Secondary Pins	Ratio <sup>A</sup>	Equivalent Single	Primary Pins	Secondary Pins	Schematic Schematic				
PE-65492	1:1	PE-64993	1-4	16-13	1:2	PE-64995	5-8	12-9	ID-1				
PE-65493	1:1	PE-64993	1-4	16-13	1:1	PE-64993	5-8	12-9	ID-1				
PE-65495	1:2	PE-64995	1-4	16-13	1:2	PE-64995	5-8	12-9	ID-1				
PE-65498	1:2.5	PE-64998	1-4	16-13	1:2.5	PE-64998	5-8	12-9	ID-1				
PE-65499	1:2	PE-64999	1-4	16-13	1:2	PE-64999	5-8	12-9	ID-1				

NOTE: Refer to the equivalent single part number for electrical specifications.

(See Pages 4 and 5 for Table Notes)

#### **Mechanical**

#### **Schematic**

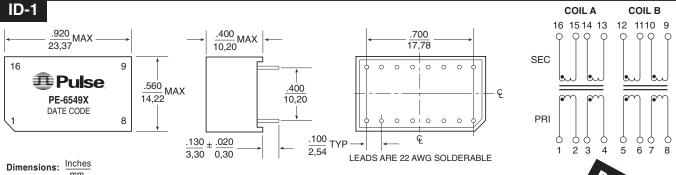

Dimensions: mm

Unless otherwise specified all tolerances are ±.010

See page 4 for packaging information.

#### Electrical Specifications @ 25°C — Operating Temperature 0°C to 70°C

#### 3KV REINFORCED INSULATION, THROUGH HOLE, SINGLE TRANSFORMERS


D:	Pulse art Number	<b>Ratio <sup>A</sup></b> ± 2%	OCL Pri (mH MIN)	L <sub>L</sub> Sec (µH MAX)	C <sub>W/w</sub> (pF MAX)	<b>C</b> <sub>D</sub> (pF MAX)	<b>D</b> ( (Ω ±		Unbalanced I <sub>DC</sub> <sup>C</sup>	Package/ Schematic
	art Number	(Pri:Sec)	i:Sec) (MH MIIN) (	(μι ι ινιλλ)	(pi wax)	(pi wax)	Primary	Secondary	(mA MAX)	Schematic
	PE-68992	1CS:2CT	22	15	60	80	3.0	5.5	5	WD-1/B
	PE-68993	1CS:1	22	5	40	40	2.8	2.7	5	WD-1/A
	PE-68995	1CS:2	22	15	60	80	3.0	5.5	5	WD-1/A
	PE-68998	1CS:2.5	22	8-40	60	110	3.0	7.0	5	WD-1/A
	PE-68999	1CS:2	22	11	50	110	2.8	5.5	5	WD-1/A

NOTE: Parts comply with EN 41003/EN 60950 and IEC-950. For SMT versions of reinforced products, refer to data sheet T633.

(See Pages 4 and 5 for Table Notes)

#### **Mechanical**

### **Schematic**

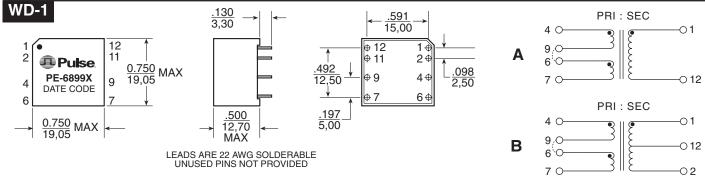

Dimensions: Inches mm

Unless otherwise specified, all tolerances are  $\pm \frac{.010}{0.25}$ 

See page 4 for packaging information.



### **Transformer Selection and Packaging**

IC Manufacturer	IC Part Number	Dual Surface Mount	Single Through Hole, 2 KVrms		Dual Through Hole		igle ble, 3 KVrms
		Trans & Rec	Transmit	Receive	Trans & Rec	Transmit	Receive
AMD	Am 79C30A/79C32A	PE-65799	PE-64999	PE-64999	PE-65499	PE-68999	PE-68999
AT&T/Lucent	T7250/7256/7259 T7903	PE-65798 PE-65795	PE-64998 PE-64995	PE-64998 PE-64995	PE-65498 PE-65495	PE-68998 PE-68995	PE-68998 PE-68995
Mietec	MTC-2072	PE-65795	PE-64995	PE-64995	PE-65495	PE-68995	PE-68995
Mitel	MT8930	PE-65795	PE-64995	PE-64995	PE-65495	PE-68995	PE-68995
Motorola	MC145474/145475 MC145574	PE-65793 PE-65798	PE-64993 PE-64998	PE-64993 PE-64998	PE-65493 PE-65498	PE-68993 PE-68998	PE-68993 PE-68998
National <sup>D</sup>	TP3420/3421	PE-65795	PE-64995	PE-64995	PE-65495	PE-68995	PE-68992
SGS Thomson	ST5420, ST5421	PE-65795	PE-64995	PE-64995	PE-65495	PE-68995	PE-68995
Siemens	PEB 2080/2081/2085 PSB 2186 PEB 2084/2086	PE-65795	PE-64995	PE-64995	PE-65495	PE-68995	PE-68995
Yamaha	7405B	PE-65795	PE-64995	PE-64995	PE-65495	PE-68995	PE-68995

#### **NOTES**

- A. In this catalog, turns ratio is expressed as "primary:secondary". The term "CT" designates a center tapped winding. The term "CS" designates a split center tap winding. A center tapped winding can be created by connecting two ends of a split center winding together on the printed circuit board. In ISDN-S applications, the primary winding is the line side transformer winding.
- B. The minimum primary inductance and the maximum distributed capacitance satisfy the transmitter output and receiver input impedance requirements of CCITT I.430 for both the TE and the NT. The maximum distributed capacitance allows sufficient margin for the capacitance of the IC and a protection diode network. It is consistent with the overall maximum value specified and the permitted length of the basic access TE cord.
- C. The maximum specified unbalanced DC current capability is based on 20 mH minimum primary OCL.

- D. National recommends a 1:2 receive transformer, but used as a 1:1 ratio by connecting only half the secondary winding. See National's application note.
- E. PE-65950, PE-68613 and PE-65853 are recommended for use with Siemens PEB 2080/2085 and help in meeting the required longitudinal balance.
- F. Standard packaging for all chokes and transformers listed in this catalog is anti-static tubes. Optional anti-static tray packaging can be ordered for the surface mount SC-1 and LA-1 packages by adding an "R" suffix to the part number, (ie: PE-65795R). Optional tape and reel packaging can be ordered for all surface mount packages by adding a "T" suffix to the part number, (ie: PE-65795T).
- G. For PE-65854, OCL at -40°C is 27  $\mu$ H minimum. For maximum performance use windings (1-8) and (2-7) as a pair and windings (3-6) and (4-5) as a pair.
- H. For PCMCIA packages, refer to data sheet T631.
- I. For transformers and choke modules, refer to data sheet **T632**.

	Packaging Information													
Package <sup>F</sup>	Туре	Part Weight	Parts/Tube	Parts/Tray	Parts/Reel	Reel Diameter	Tape Width	Pitch						
LA-1	SMT	2.0 grams	30	60	250	13 inches	24 mm	24 mm						
PA-2	SMT	4.0 grams	35	_	150	13 inches	32 mm	24 mm						
SC-1	SMT	7.0 grams	20	50	150	13 inches	44 mm	24 mm						
SH-4	SMT	0.3 grams	25	_	1500	13 inches	24 mm	12 mm						
ID-1	THT	7.0 grams	20	_	_	-	_	-						
IN-1	THT	2.5 grams	35	_	-	_	_	_						
IS	THT	4.0 grams	35	_	-	-	_	-						
VC-1	THT	3.5 grams	40	_	-	_	_	-						
WD-1	THT	9.0 grams	25	_	-	_	_	-						

(See Pages 4 and 5 for Table Notes)

### **Application Notes**



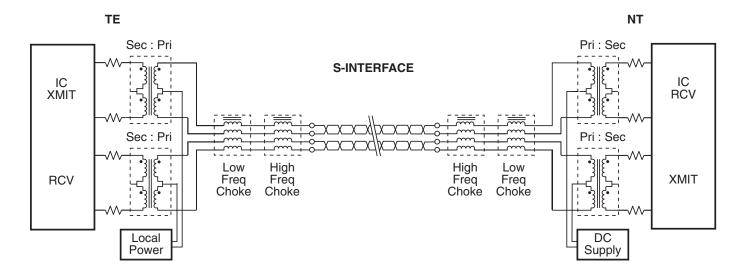


Figure 1. Typical ISDN S-Interface Application Circuit

1. General Information – The S-interface is the standardized four-wire digital telephone access point defined by the CCITT I-series recommendations for the Integrated Services Digital Network. This "basic rate access" accommodates two 64 Kbps "B-channels" for information, one 16 Kbps "D-channel" intended for signaling and control, and 48 Kbps for framing and other purposes, giving a total rate of 192 Kbps. The CCITT physical layer recommends that the user network interface be transformer coupled. A typical application circuit is presented in Figure 1.

The transformer provides isolation for the line card or the terminal from the line. It is also a way to provide phantom power feeding to the terminal over the S-loop. Each end requires a transmit and a receive transformer. Chokes are used in some applications to reduce common mode noise (see note 5).

The transformers described in this data sheet are matched to the transceivers offered by the major IC manufacturers listed. The use of a transformer-chip pair assures that all requirements of CCITT I.430 are met with respect to pulse waveform templates, impedance and longitudinal balance. In addition, the transformers provide the isolation voltages required by the regulatory agencies and are capable of passing surge voltage tests.

2. Safety Standards Recognition – All transformers listed in this data sheet are UL 1459 recognized, file number

E133523 (S), and have received a certificate of recognition from the British Approvals Board for Telecommunications (BABT) for compliance with BS 6301:1989/BS 415 and EN 41003/EN 60 950 as a supplementary barrier. Please consult Pulse regarding additional agency recognitions.

All of the 3 kV reinforced insulation transformers in the PE-6899X series are certified by TÜV to comply with EN41003 and EN60950 as reinforced insulation under certificate R9371358.04-.06. This series is also certified by BABT to comply with EN41003, EN60950 and BS6301 under certificate CR/0079 as reinforced insulation.

3. Longitudinal Balance for Transformers - The longitudinal conversion loss specification in I.430 includes a test setup that is intended for system evaluation, whether TE or NT. Such a test is performed with DC current present. The transformer plays an essential role in achieving the required balance. However, all other elements in the circuit should be also designed to provide the highest possible symmetry. These elements include the protection circuitry, series resistors, chip transmitter output and receiver input, as well as the cables used and the TE cord where applicable. A high level of transformer balance compensates for some circuit AC-unbalance, and assures compliance of the system with I.430 on longitudinal conversion loss (LCL) and signal balance. This is accomplished by a well AC-balanced winding configuration (continued on next page)

### **Application Notes**



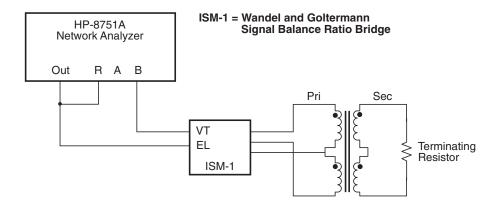


Figure 2. Longitudinal Balance Test Circuit

(continued from previous page)

whereby the capacitive coupling between primary and secondary windings is evenly distributed. Also, both halves of the lineside winding are well balanced. The transformers meet the following LCL specifications:

- 10 kHz to 300 kHz: 60 dB minimum
- 300 kHz to 1 MHz: Minimum value decreasing 20 dB/decade.


A recommended test setup is shown in **Figure 2.** A high inductance "low frequency" common mode choke, such as PE-65950 or PE-65853, is recommended to improve balance, or to correct inherent unbalances of some circuits.

4. Impedance Requirements - The requirements for minimum impedance in the inactive and powered-down states are expressed by impedance templates for both transmitter and receiver in NT and TE. At the low frequency end of 1 MHz, it is reasonable to assume that the impedance seen from the line is entirely capacitive. The maximum capacitance budget, derived from the templates, is somewhat different for the NT and the TE. Contributors to the total capacitance are: the chip output, the protection circuit, the transformer, common mode choke and any other element that may be present. In the TE case, there is also the maximum allowable TE cord impedance. Here the maximum budget is 800 pF. As a rule, the capacitances should be kept as low as possible in the interface circuit design. With the specified transformer capacitances, it is possible to remain within budget and have a reasonable margin for measurement errors.

- 5. Common Mode Chokes The "high frequency" 4-wire common mode chokes shown on pages 7 and 8 provide an effective means of compliance with national and international regulations on EMI. They are designed to be used in conjunction with either Pulse's ISDN S-Interface or T1/CEPT transformers as shown in Figure 1. A high inductance "low frequency" common mode choke is recommended to improve balance, or to correct inherent unbalances of some ISDN S-Interface circuits.
- 6. Surge Voltage Capability for Transformers and Chokes
  - Longitudinal Voltage Peak: 2,400 V 10/700 µsec
  - Metallic Voltage Peak: 800 V 10/560 μsec
- 7. Behavior Under Fault Conditions Telephony voltages may accidentally appear on the ISDN S-Interface line to the transformer. The transformer will withstand a DC current of 0.5 Amps for 15 minutes without permanent damage. Such current may be caused by the telephone central battery. The transformer will also survive ringing voltages. These are nominally 120 V or 200 V maximum at 20 to 60 Hz, limited by 1500  $\Omega$  resistive or 400 to 600  $\Omega$  inductive limiting. These may cause peak currents.
- Flammability Materials used in the products are recognized UL94-VO. Products meet the requirements of IEC 695-2-2 (Needle Flame Test).

## **Common Mode Chokes for Telecom Applications**



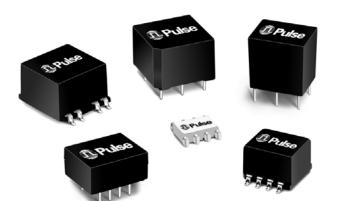


- Designed for 4-wire links, ISDN-S/T and T1/E1/CEPT
- High frequency chokes for EMI reduction
- Low frequency chokes improve longitudinal balance in ISDN-S/T links
- Surface mount and through hole models available


	Electrical Specifications @ 25°C — Operating Temperature 0°C to 70°C												
Part Number	OCL Pri	<b>L</b> L <b>Sec</b> (μΗ MAX)	C <sub>W/W</sub> (pF MAX)	DCR (Ω MAX)	Isolation (Vrms MIN)	Package/ Schematic							
Low Frequency													
PE-65541	6.0 mH MIN	35	25	1.40	1,500	IS-4/1C (Through Hole)							
PE-65542	1.0 mH MIN	10	10	0.70	1,500	IS-4/1C (Through Hole)							
PE-65853 <sup>E</sup>	4.7 mH ±30%	1	60	1.20	500	PA-2/5C (Surface Mount)							
PE-65950 <sup>E</sup>	4.7 mH ±30%	1	50	1.00	500	IS-4/1C (Through Hole)							
PE-68613 <sup>E</sup>	4.7 mH ±30%	1	60	1.00	500	VC-1/5C (Through Hole)							
HIGH FREQUENCY													
PE-65554	24.0 μH MIN	.20	15	0.30	500	IN-1/C (Through Hole)							
PE-65555	8.0 μH MIN	.20	10	0.25	500	IN-1/C (Through Hole)							
PE-65854 F	47.0 μH MIN	.18	20	0.40	500	SH-4/C (Surface Mount)							
PE-65857	22.5 μH MIN	.23	17	0.30	500	LA-1/C (Surface Mount)							

NOTE: For additional Common Mode Chokes, refer to data sheet G002.


Typical common mode attenuation for low frequency common mode chokes based on a 100  $\Omega$  system.

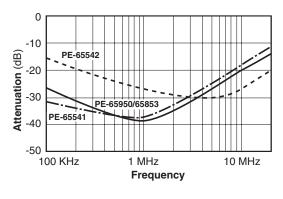


Typical impedance for low frequency common mode chokes based on a 100  $\Omega$  system.



Typical common mode attenuation for high frequency common mode chokes based on a 100  $\Omega$  system.

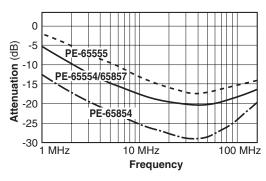

Typical impedance for high frequency common mode chokes based on a 100  $\Omega$  system.




U.S: 858 674 8100 • U.K: 44 1483 401 700 • France: 33 3 84 35 04 04 • Singapore: 65 287 8998 • Taiwan: 886 2 2698 0228 • http://www.pulseeng.com


### **Common Mode Chokes for Telecom Applications**




#### **Mechanicals**

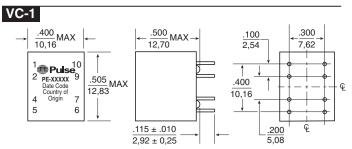

See page 4 for packaging information.

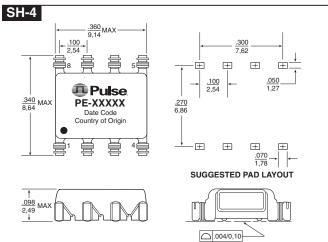

See page 4 for packaging information.

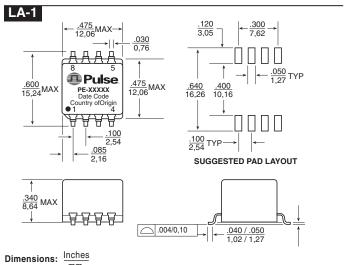

For More Information:

Unless otherwise specified all tolerances are  $\pm .010$ 

### **UNITED STATES** (Worldwide)

12220 World Trade Drive San Diego, CA 92128 U.S.A.

http://www.pulseeng.com TEL: 858 674 8100 FAX: 858 674 8262

#### **UNITED KINGDOM** (Northern Europe)

FAX: 44 1483 401701

1 & 2 Huxley Road The Surrey Research Park Guildford, Surrey GU2 5RE United Kingdom TEL: 44 1483 401700

### **FRANCE** (Southern Europe)

See page 4 for packaging information.


> Zone Industrielle F-39270 Orgelet France TEL: 33 3 84 35 04 04 FAX: 33 3 84 25 46 41

#### **SINGAPORE** (Southern Asia)


150 Kampong Ampat #07-01/02 KA Centre Singapore 368324 TEL: 65 287 8998 FAX:65 280 0080

#### TAIWAN, R.O.C. (Northern Asia)


3F-4, No. 81, Sec. 1 HsinTai Wu Road Hsi-Chih, Taipei Hsien Taiwan, R.O.C. Tel: 886 2 2698 0228 FAX: 886 2 2698 0948

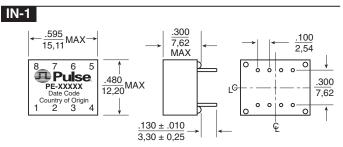


See page 4 for packaging information.

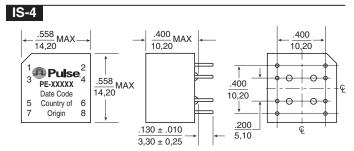

See page 4 for packaging information.

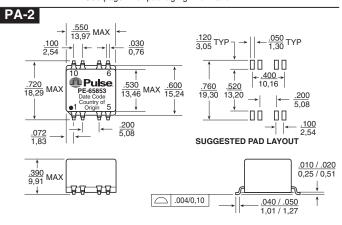

See page 4 for packaging information.

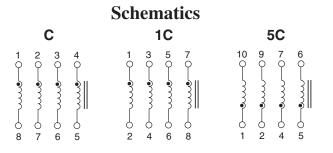

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be products and/or registered trademarks of their respective owners.

**DISTRIBUTOR**