



ai Alpha

1


Typical Performance Data (0, -5 V)

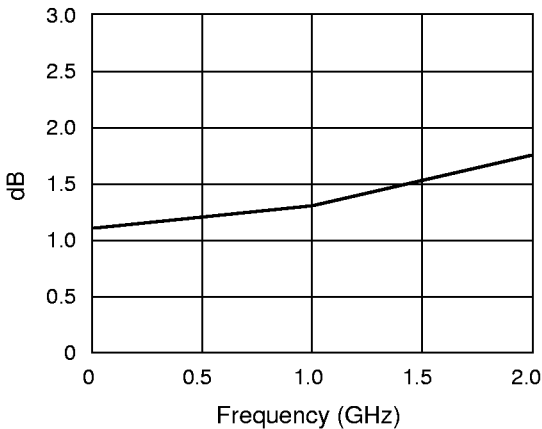

Insertion Loss vs. Frequency

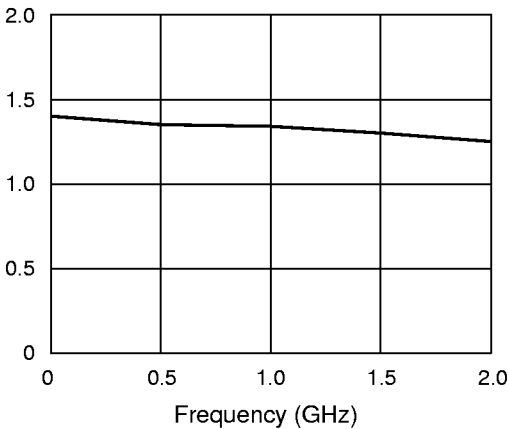

VSWR vs. Frequency (All States)

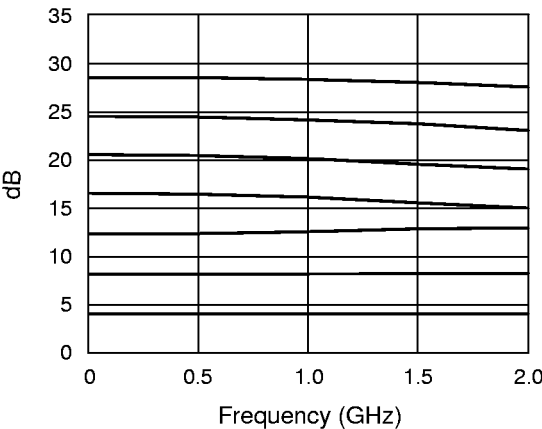

Attenuation vs. Frequency (All States)

Truth Table

4 dB		8 dB		16 dB		Attenuation J ₁ –J ₂
V ₁	V ₂	V ₃	V ₄	V ₅	V ₆	
-5	0	-5	0	-5	0	Reference I.L.
0	-5	-5	0	-5	0	4 dB
-5	0	0	-5	-5	0	8 dB
-5	0	-5	0	0	-5	16 dB
0	-5	0	-5	0	-5	28 dB

Absolute Maximum Ratings

Characteristic	Value
RF Input Power	2 W > 500 MHz 0/-8 V 0.5 W @ 50 MHz 0/-8 V
Control Voltage	+0.2 V, -8 V
Operating Temperature	-40°C to 85°C
Storage Temperature	-65°C to 150°C

Note: Exceeding these parameters may cause irreversible damage.

Pin Out

