


UDN2981A thru UDN2984A

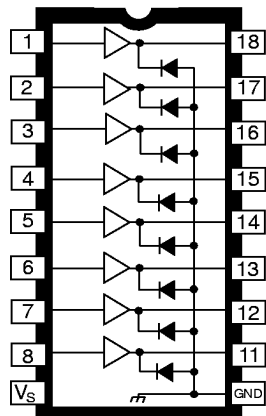

Dwg. No. A-10, 243

Note that the UDN2980A series (dual in-line package) and UDN2980LW series (small-outline IC package) are electrically identical and share a common terminal number assignment.

ABSOLUTE MAXIMUM RATINGS at 25°C Free-Air Temperature

Output Voltage Range, V_{CE} (UDN2981A, UDN2982A, UDN2982LW, and A2982SLW) . . .	5 V to 50 V
(UDN2983A, UDN2984A, UDN2984LW, and A2984SLW) . . .	35 V to 80 V
Input Voltage, V_{IN} (UDN2981A and UDN2983A)	15 V
(UDN2982A, UDN2984A, UDN2982LW, UDN2984LW, A2982SLW, and A2984SLW)	20 V
Output Current, I_{OUT}	-500 mA
Package Power Dissipation, P_D	See Graph
Operating Temperature Range, T_A	-20°C to +85°C
Storage Temperature Range, T_S	-55°C to +150°C

Recommended for high-side switching applications that benefit from separate logic and load grounds, these devices encompass load supply voltages to 80 V and output currents to -500 mA. These 8-channel source drivers are useful for interfacing between low-level logic and high-current loads. Typical loads include relays, solenoids, lamps, stepper and/or servo motors, print hammers, and LEDs.

All devices may be used with 5 V logic systems — TTL, Schottky TTL, DTL, and 5 V CMOS. The UDN2981A, UDN2982A, UDN2982LW, and A2982SLW are electrically interchangeable, will withstand a maximum output OFF voltage of 50 V, and operate to a minimum of 5 V; the UDN2983A, UDN2984A, UDN2984LW, and A2984SLW drivers are electrically interchangeable, will withstand an output voltage of 80 V, and operate to a minimum of 35 V. All devices in this series integrate input current limiting resistors and output transient suppression diodes, and are activated by an active high input.

The suffix 'A' (all devices) indicates an 18-lead plastic dual in-line package with copper lead frame for optimum power dissipation. Under normal operating conditions, these devices will sustain 120 mA continuously for each of the eight outputs at an ambient temperature of +50°C and a supply of 15 V.

The suffix 'LW' (UDN2982LW and UDN2984LW only) indicates an 18-lead surface-mountable wide-body SOIC package; the A2982SLW and A2984SLW are provided in a 20-lead wide-body SOIC package with improved thermal characteristics.

The UDN2982A, UDN2982LW, A2982SLW, UDN2984A, UDN2984LW, and A2984SLW drivers are also available for operation over an extended temperature range to -40°C. To order, change the prefix 'UDN' to 'UDQ' or the suffix 'SLW' to 'ELW'.

FEATURES


- TTL, DTL, PMOS, or CMOS Compatible Inputs
- 500 mA Output Source Current Capability
- Transient-Protected Outputs
- Output Breakdown Voltage to 80 V
- DIP or SOIC Packaging

Always order by complete part number, e.g., **UDN2981A**.
Note that all devices are not available in all package styles.




2981 THRU 2984 8-CHANNEL SOURCE DRIVERS


One of Eight Drivers

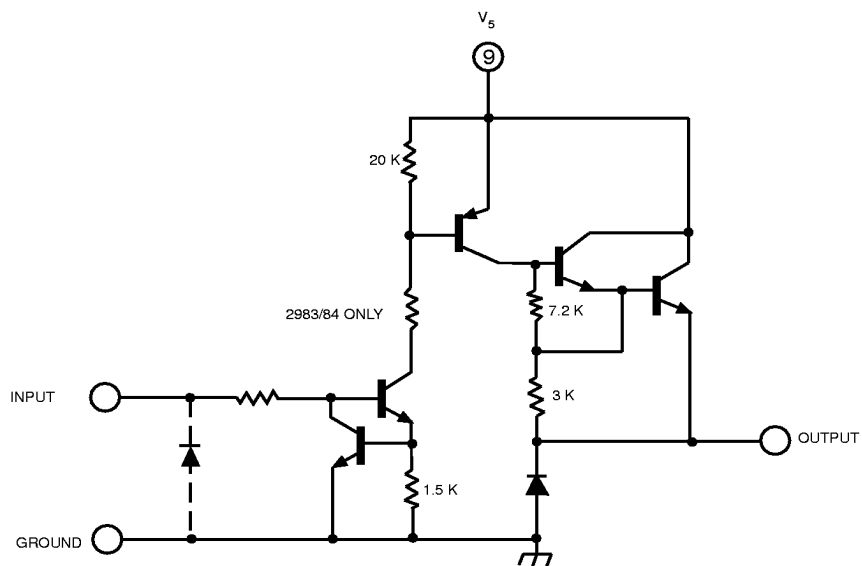

A2982SLW and A2984SLW

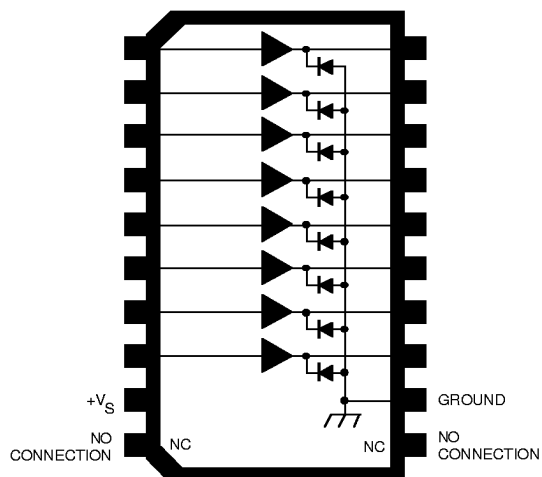

Dwg. PP-064-2

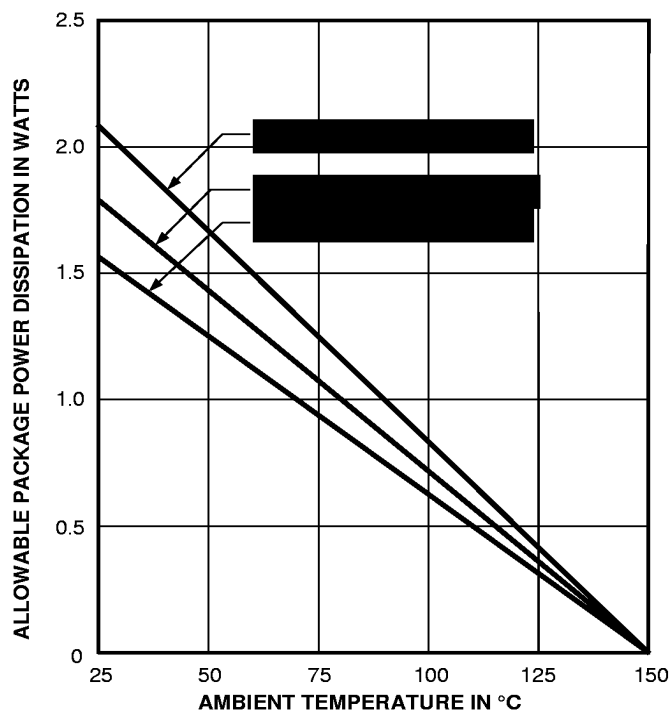

Dwg. GP-022-4



115 Northeast Cutoff, Box 15036
Worcester, Massachusetts 01615-0036 (508) 853-5000
Copyright © 1977, 1999 Allegro Microsystems, Inc.

2981 THRU 2984

8-CHANNEL

SOURCE DRIVERS

ELECTRICAL CHARACTERISTICS at $T_A = +25^\circ\text{C}$ (unless otherwise specified).

Characteristic	Symbol	Applicable Devices	Test Conditions	Test Fig.	Limits			
					Min.	Typ.	Max.	Units
Output Leakage Current	I_{CEX}	2981/82†	$V_{\text{IN}} = 0.4 \text{ V}^*$, $V_{\text{S}} = 50 \text{ V}$, $T_A = +70^\circ\text{C}$	1	—	—	200	μA
		2983/84†	$V_{\text{IN}} = 0.4 \text{ V}^*$, $V_{\text{S}} = 80 \text{ V}$, $T_A = +70^\circ\text{C}$	1	—	—	200	μA
Output Sustaining Voltage	$V_{\text{CE(SUS)}}$	2981/82†	$I_{\text{OUT}} = -45 \text{ mA}$	—	35	—	—	V
		2983/84†	$I_{\text{OUT}} = -70 \text{ mA}$	—	45	—	—	V
Collector-Emitter Saturation Voltage	$V_{\text{CE(SAT)}}$	All	$V_{\text{IN}} = 2.4 \text{ V}$, $I_{\text{OUT}} = -100 \text{ mA}$	2	—	1.6	1.8	V
			$V_{\text{IN}} = 2.4 \text{ V}$, $I_{\text{OUT}} = -225 \text{ mA}$	2	—	1.7	1.9	V
			$V_{\text{IN}} = 2.4 \text{ V}$, $I_{\text{OUT}} = -350 \text{ mA}$	2	—	1.8	2.0	V
Input Current	$I_{\text{IN(ON)}}$	2981/83A	$V_{\text{IN}} = 2.4 \text{ V}$	3	—	140	200	μA
			$V_{\text{IN}} = 3.85 \text{ V}$	3	—	310	450	μA
		2982/84†	$V_{\text{IN}} = 2.4 \text{ V}$	3	—	140	200	μA
			$V_{\text{IN}} = 12 \text{ V}$	3	—	1.25	1.93	mA
Output Source Current (Outputs Open)	I_{OUT}	2981/83A	$V_{\text{IN}} = 2.4 \text{ V}$, $V_{\text{CE}} = 2.0 \text{ V}$	2	-350	—	—	mA
		2982/84†	$V_{\text{IN}} = 2.4 \text{ V}$, $V_{\text{CE}} = 2.0 \text{ V}$	2	-350	—	—	mA
Supply Current Leakage Current	I_{S}	2981/82†	$V_{\text{IN}} = 2.4 \text{ V}^*$, $V_{\text{S}} = 50 \text{ V}$	4	—	—	10	mA
		2983/84†	$V_{\text{IN}} = 2.4 \text{ V}^*$, $V_{\text{S}} = 80 \text{ V}$	4	—	—	10	mA
Clamp Diode Forward Voltage	I_{R}	2981/82†	$V_{\text{R}} = 50 \text{ V}$, $V_{\text{IN}} = 0.4 \text{ V}^*$	5	—	—	50	μA
		2983/84†	$V_{\text{R}} = 80 \text{ V}$, $V_{\text{IN}} = 0.4 \text{ V}^*$	5	—	—	50	μA
Clamp Diode	V_{F}	All	$I_{\text{F}} = 350 \text{ mA}$	6	—	1.5	2.0	V
Turn-On Delay	t_{ON}	All	$0.5 E_{\text{IN}}$ to $0.5 E_{\text{OUT}}$, $R_{\text{L}} = 100\Omega$, $V_{\text{S}} = 35 \text{ V}$	—	—	1.0	2.0	μs
Turn-Off Delay	t_{OFF}	All	$0.5 E_{\text{IN}}$ to $0.5 E_{\text{OUT}}$, $R_{\text{L}} = 100\Omega$, $V_{\text{S}} = 35 \text{ V}$, See Note	—	—	5.0	10	μs

NOTES: Turn-off delay is influenced by load conditions. Systems applications well below the specified output loading may require timing considerations for some designs, i.e., multiplexed displays or when used in combination with sink drivers in a totem pole configuration.

Negative current is defined as coming out of (sourcing) the specified device terminal.

* All inputs simultaneously.


† Complete part number includes a prefix (A or UDN) and a suffix (A or SLW) as follows:

UDN2981A,
UDN2982A, UDN2982LW, or A2982SLW,
UDN2983A,
UDN2984A, UDN2984LW, or A2984SLW.

2981 THRU 2984 8-CHANNEL SOURCE DRIVERS


TEST FIGURES

Figure 1




Dwg. No. A-11,083

Figure 2

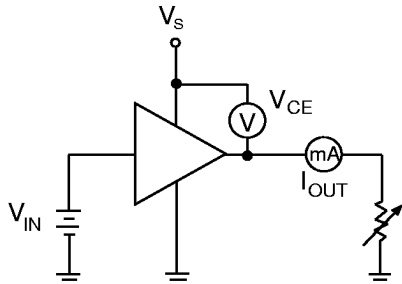


Dwg. No. A-11,084

Figure 3

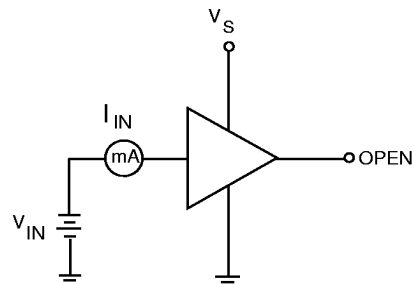


Dwg. No. A-11,085

Figure 4

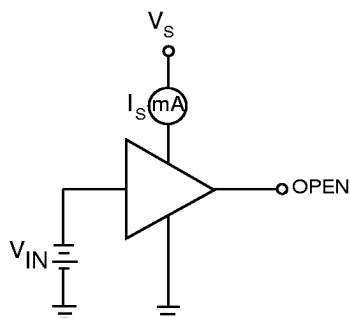


Dwg. No. A-11,086

Figure 5



Dwg. No. A-11,087

Figure 6

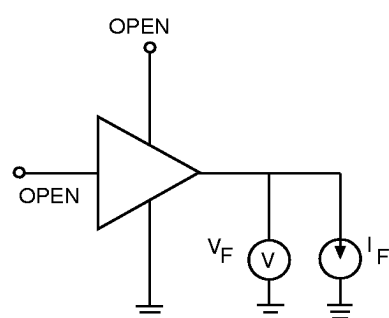

Dwg. No. A-11,088




115 Northeast Cutoff, Box 15036
Worcester, Massachusetts 01615-0036 (508) 853-5000


2981 THRU 2984 8-CHANNEL SOURCE DRIVERS

Allowable peak collector current as a function of duty cycle

Series UDN2980A

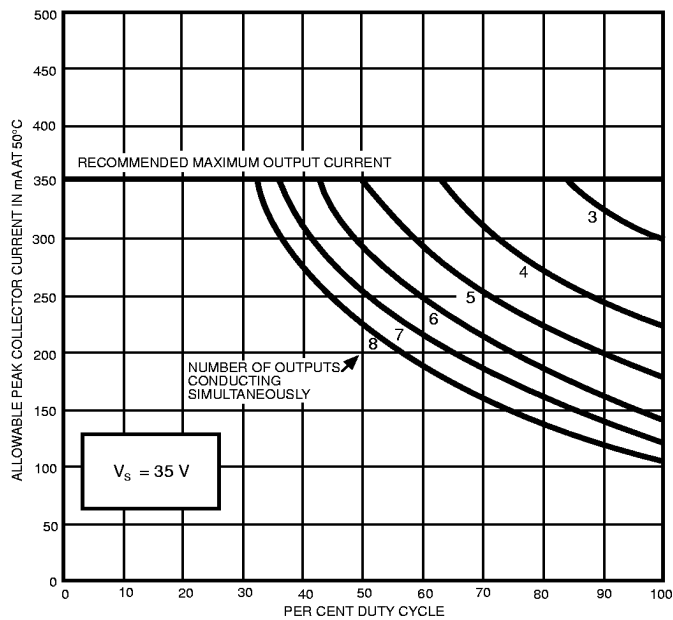


Dwg. No. A-11,106B

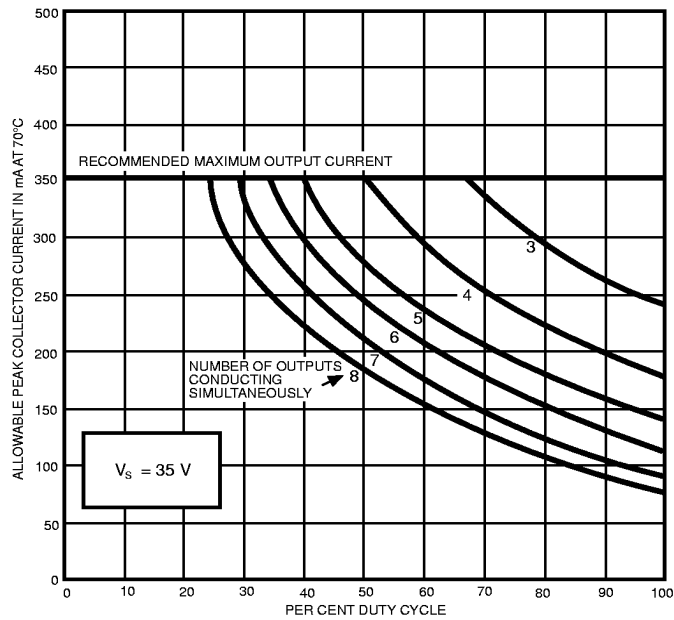


Dwg. No. A-11,111B

UDN2981A and UDN2982A

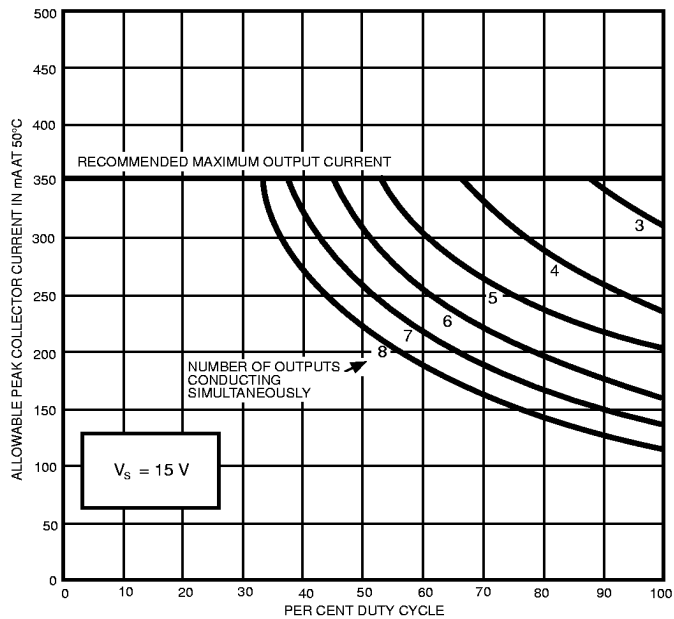

Dwg. No. A-11,107B

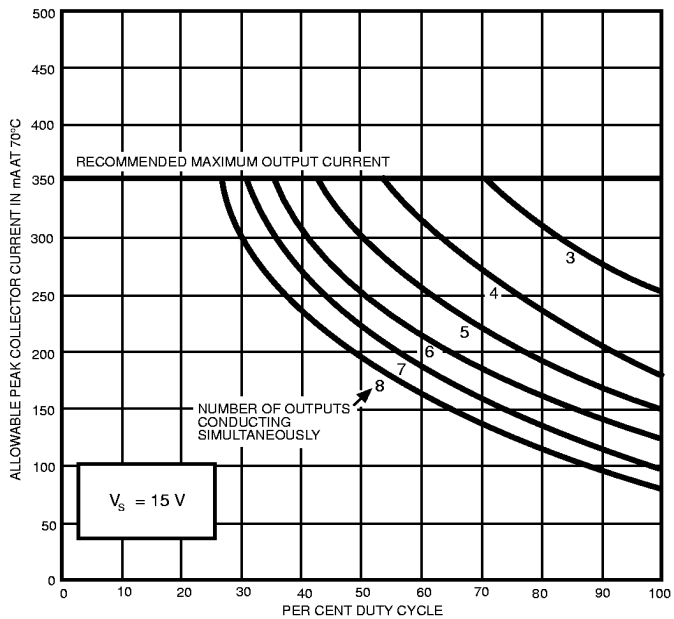


Dwg. No. A-11,108B


2981 THRU 2984 8-CHANNEL SOURCE DRIVERS

Allowable peak collector current as a function of duty cycle

UDN2983A and UDN2984A

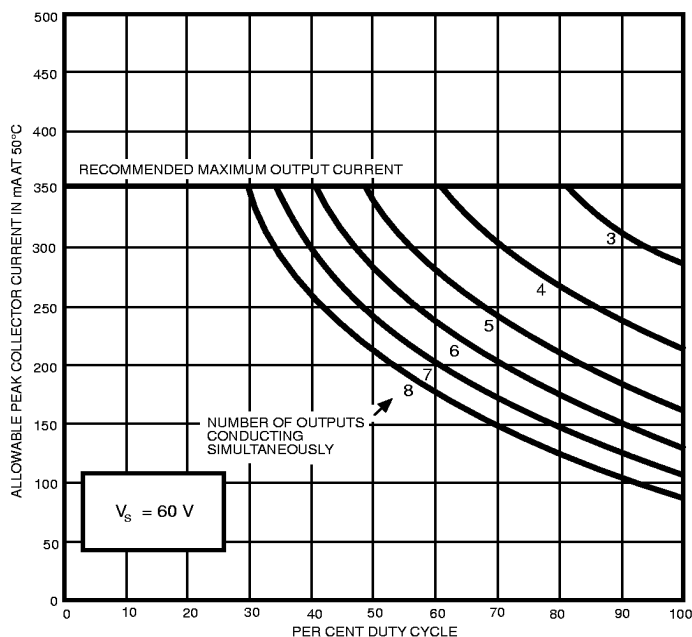


Dwg. No. A-11,109B

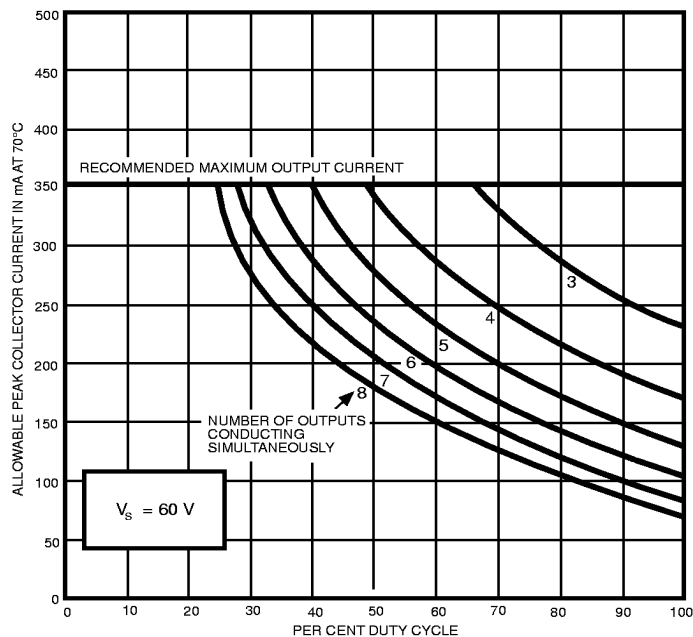


Dwg. No. A-11,110B

Input current as a function of input voltage

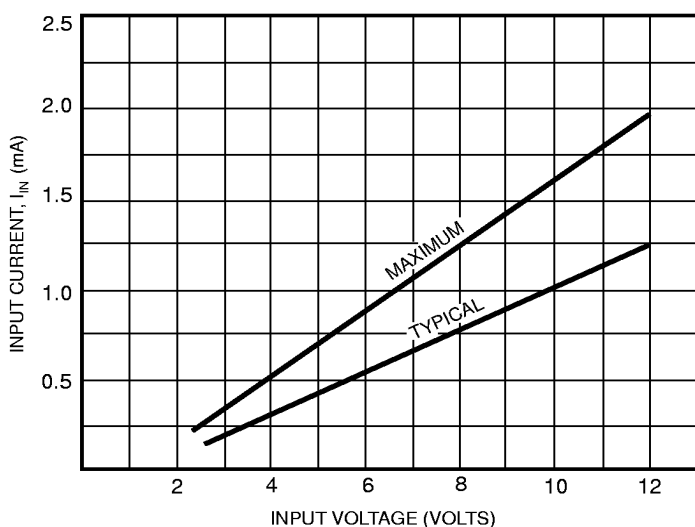

Dwg. No. A-11,115B

Typical electrosensitive printer application

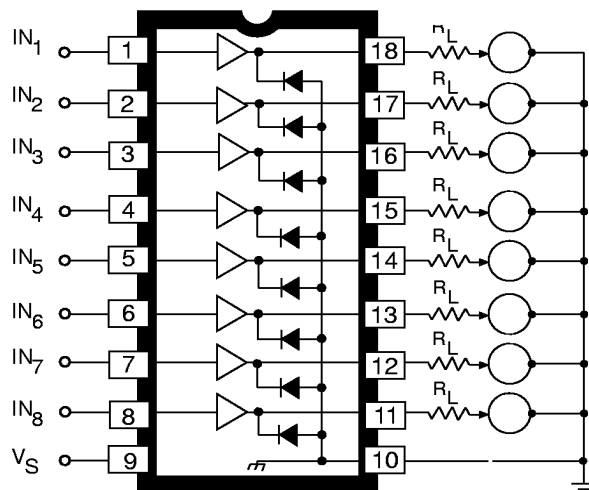

Dwg. No. A-11,113A




115 Northeast Cutoff, Box 15036
Worcester, Massachusetts 01615-0036 (508) 853-5000


2981 THRU 2984
8-CHANNEL
SOURCE DRIVERS

UDN2981A, UDN2982A, UDN2983A, and UDN2984A

Dimensions in Inches
 (controlling dimensions)

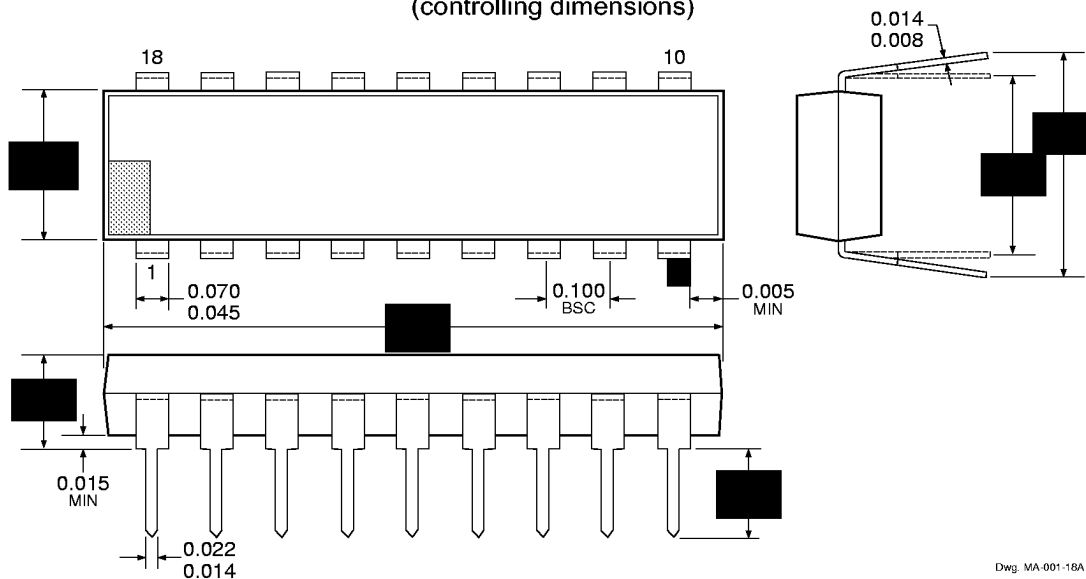

Dimensions in Millimeters
 (for reference only)

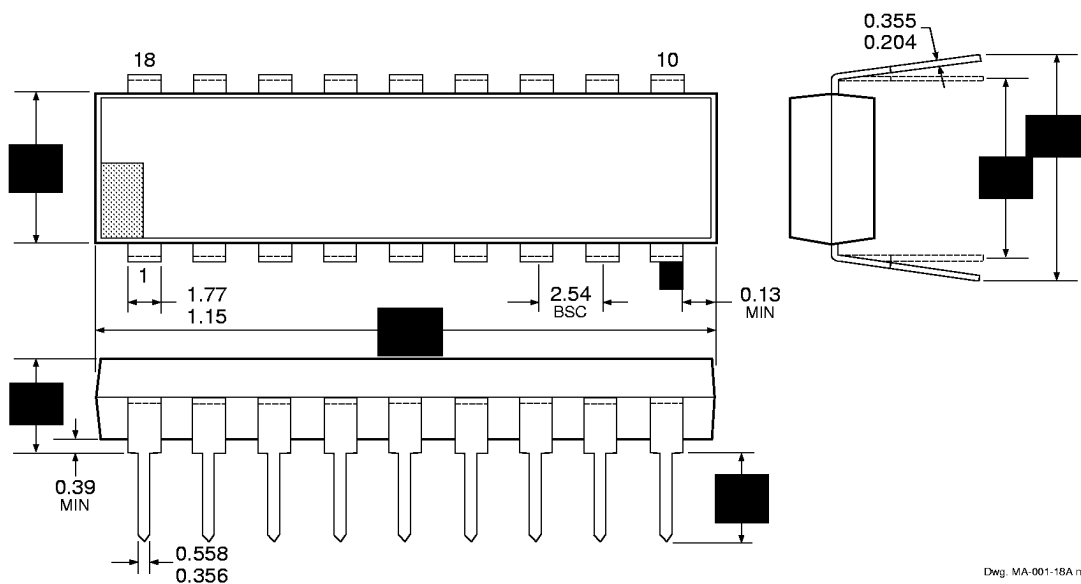


- NOTES: 1. Exact body and lead configuration at vendor's option within limits shown.
 2. Lead spacing tolerance is non-cumulative.
 3. Lead thickness is measured at seating plane or below.


2981 THRU 2984
8-CHANNEL
SOURCE DRIVERS

UDN2982LW and UDN2984LW

Dimensions in Inches
(for reference only)

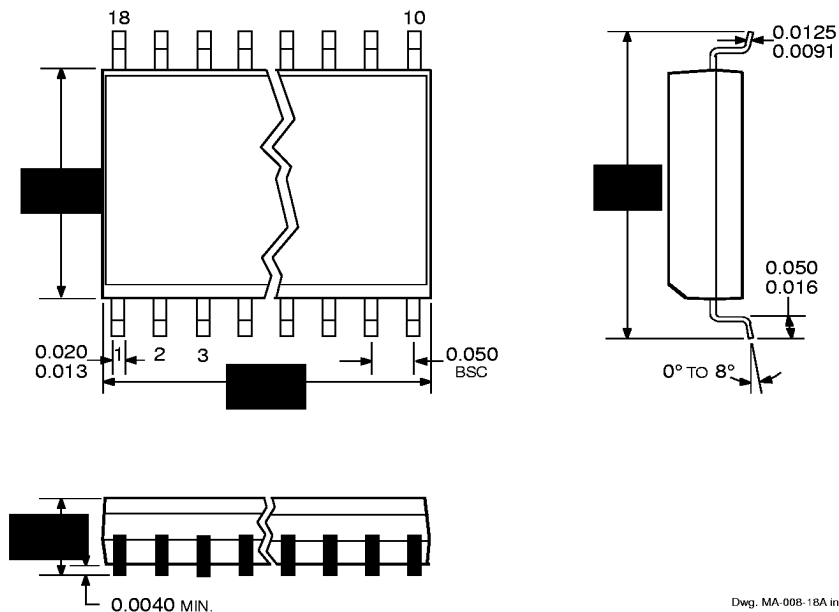

Dimensions in Millimeters
(controlling dimensions)

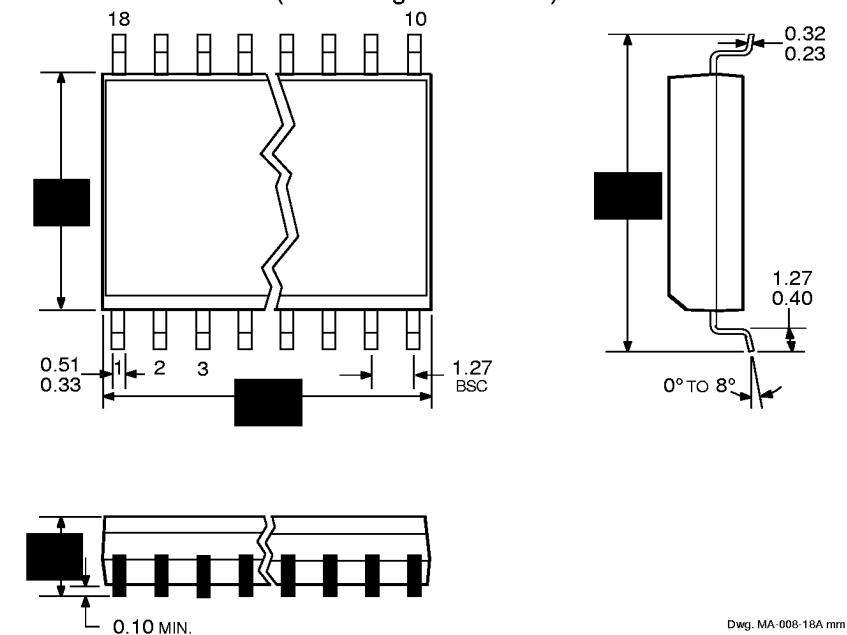

- NOTES: 1. Exact body and lead configuration at vendor's option within limits shown.
2. Lead spacing tolerance is non-cumulative.




115 Northeast Cutoff, Box 15036
Worcester, Massachusetts 01615-0036 (508) 853-5000


2981 THRU 2984
8-CHANNEL
SOURCE DRIVERS

A2982SLW and A2984SLW

Dimensions in Inches
(for reference only)

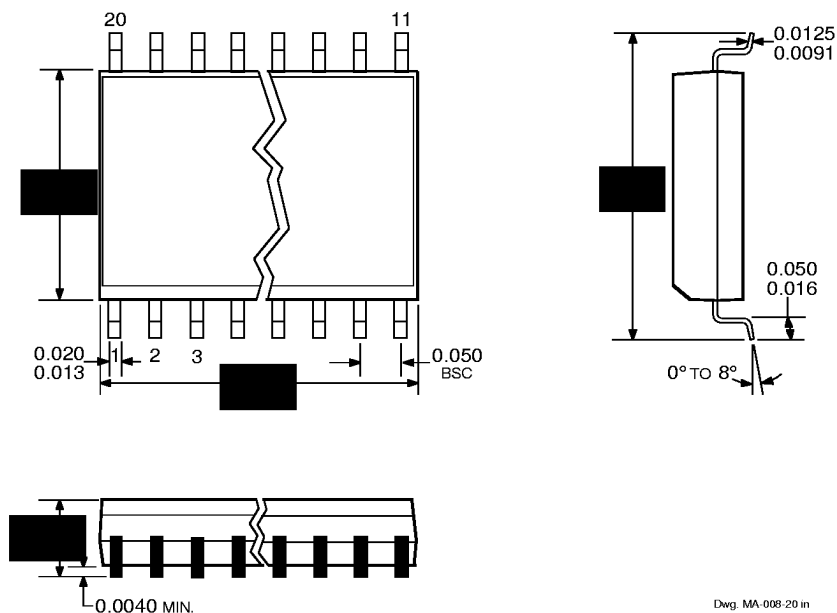

Dimensions in Millimeters
(controlling dimensions)

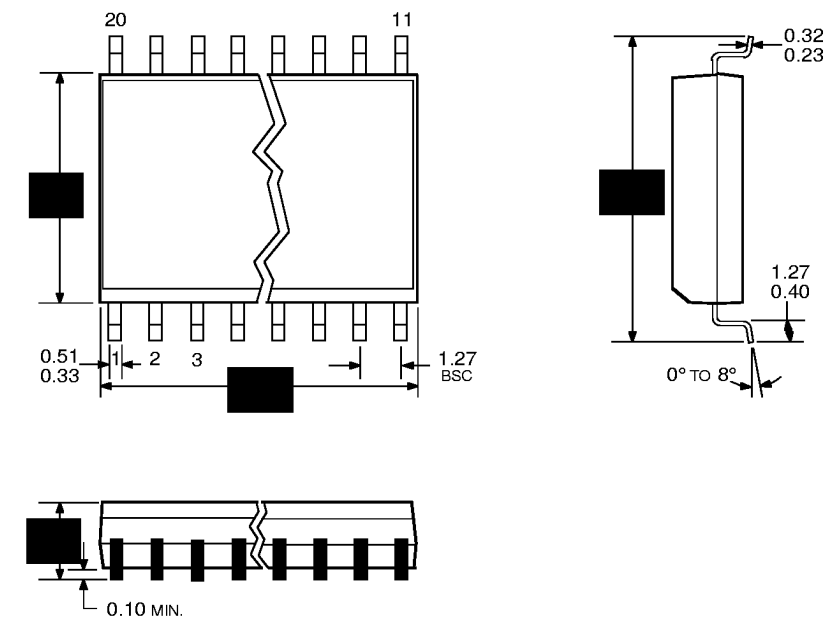

- NOTES: 1. Exact body and lead configuration at vendor's option within limits shown.
2. Lead spacing tolerance is non-cumulative.

2981 THRU 2984
8-CHANNEL
SOURCE DRIVERS

POWER SOURCE DRIVERS SELECTION GUIDE

IN ORDER OF 1) OUTPUT CURRENT, 2) OUTPUT VOLTAGE, 3) NUMBER OF DRIVERS

Output Ratings *			Features					Part Number [†]
mA	V	#	Serial Input	Latched Drivers	Diode Clamp	Saturated Outputs	Internal Protection	
-25	60	8	—	X	—	—	—	5815
	60	10	X	X	Active Pull-Down	—	—	5810-F and 6809/10
	60	12	X	X	Active Pull-Down	—	—	5811 and 6811
	60	20	X	X	Active Pull-Down	—	—	5812-F and 6812
	60	32	X	X	Active Pull-Down	—	—	5818-F and 6818
	85	8	—	—	—	—	—	6118
-120	-25	8	—	—	X	X	—	2585
	30	8	—	—	X	X	—	2985
	50	8	X	X	X	X	—	5895
-350	35	8	—	—	X	—	X	2987
	50	8	—	—	X	—	—	2981 and 2982
	50	8	X	X	X	—	—	5891
	-50	8	—	—	X	—	—	2580
	80	8	—	—	X	—	—	2983 and 2984
	80	8	X	X	X	—	—	5890
	-80	8	—	—	X	—	—	2588

* Current is maximum specified test condition, voltage is maximum rating. See specification for sustaining voltage limits or over-current protection voltage limits.

† Complete part number includes additional characters to indicate operating temperature range and package style.

Allegro MicroSystems, Inc. reserves the right to make, from time to time, such departures from the detail specifications as may be required to permit improvements in the design of its products.

The information included herein is believed to be accurate and reliable. However, Allegro MicroSystems, Inc. assumes no responsibility for its use; nor for any infringements of patents or other rights of third parties which may result from its use.



115 Northeast Cutoff, Box 15036
Worcester, Massachusetts 01615-0036 (508) 853-5000