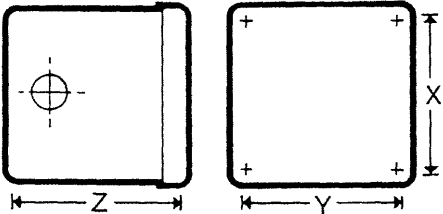
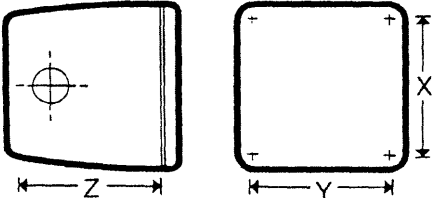


147-144
147-145
147-146
147-147

	To Fit W K2 P2 P5 W. K2 P2	A19259 Sealing Washer Black Neoprene 0.062" (1.6mm) thick A20055 Earthing Tag Brass 0.031" (0.8mm) thick
	K2 P5. W	A20254 Terminal Shroud Black flexible P.V.C. A20135 Terminal Shroud (not illustrated)
	3N 3F/T/D 3R/S 3K KS	A20201 Mounting Plate Mild steel, chrome-plated A20389 Mounting Plate Mild steel, nickel-plated. 23mm centre hole
	3F/T/D W. K2. P2	A20479 Drip-proof Lock Cover Black P.V.C.
	3F/T/D 3R/S* 3K W. K2. P2. P5 *Not suitable for mastered versions of R & S locks	A20488/1 Heavy Duty Lock Cover 3/4" x 26 TPI A20488/2 Heavy Duty Lock Cover 13/16" x 26 TPI A20488/3 Heavy Duty Lock Cover 23mm Black Nylon • Spring Loaded • Screws on body in place of bezel • Maximum projection from panel when closed 13/16"

Standard Switch Enclosures

Standard Switch Enclosures							
SHEET STEEL		Drawing No.	Nominal Internal Dimensions (ins)			Wall s.w.g.	
			X	Y	Z		
		B20291/1	3	x 3	x 2	o	20
		B20291/2	3	x 3	x 3	o	20
		B20291/3	4	x 4	x 2	w	18
		B20291/4	4	x 4	x 3	w	18
		B20291/5	4	x 4	x 4	w	18
		B20291/6	6	x 6	x 4	w	16
		B20291/7	6	x 6	x 6	w	16
		B20291/8	8	x 8	x 6	w	16
		B20291/9	8	x 8	x 8	w	16
							Cases can be drilled or fitted with the switch upon request
							o = open seams w = all welded seams
CAST ALUMINIUM		Drawing No.	Nominal Internal Dimensions (ins)				
			X	Y	Z		
		B20292/1	2 1/2	x 2 1/2	x 2 1/2		
			Max. wall thickness 0.25"				
							Cases can be drilled or fitted with the switch upon request
		All supplied with one tapped 20mm conduit entry only, unless otherwise stated. Standard finish is Silver Hammer, except B20291/1 and B20291/2 which are black, and have flat lids for flush mounting and knockouts. Drip or weatherproofing can be provided on all except B20291/1 and B20291/2. Wall mounting holes are provided only if specified. Special boxes can be supplied to customers' specification.					