

PC316 Series

Opaque*, Mini-Flat Package, High Collector-emitter voltage Type Photocoupler

Features

1. High collector-emitter voltage (V_{CEO} : 120V)
2. Opaque type, mini-flat package
PC316 (1-channel) PC3D16 (2-channel)
PC3Q16 (4-channel)
3. Subminiature type
(The volume is smaller than that of our conventional DIP type by as far as 30%.)
4. Isolation voltage between input and output
 V_{ISO} : 2,500Vrms

* Employs double transfer mold technology.


Applications

T-41-83

1. Hybrid substrates that require high density mounting
2. Programmable controllers

Outline Dimensions

(Unit : mm)

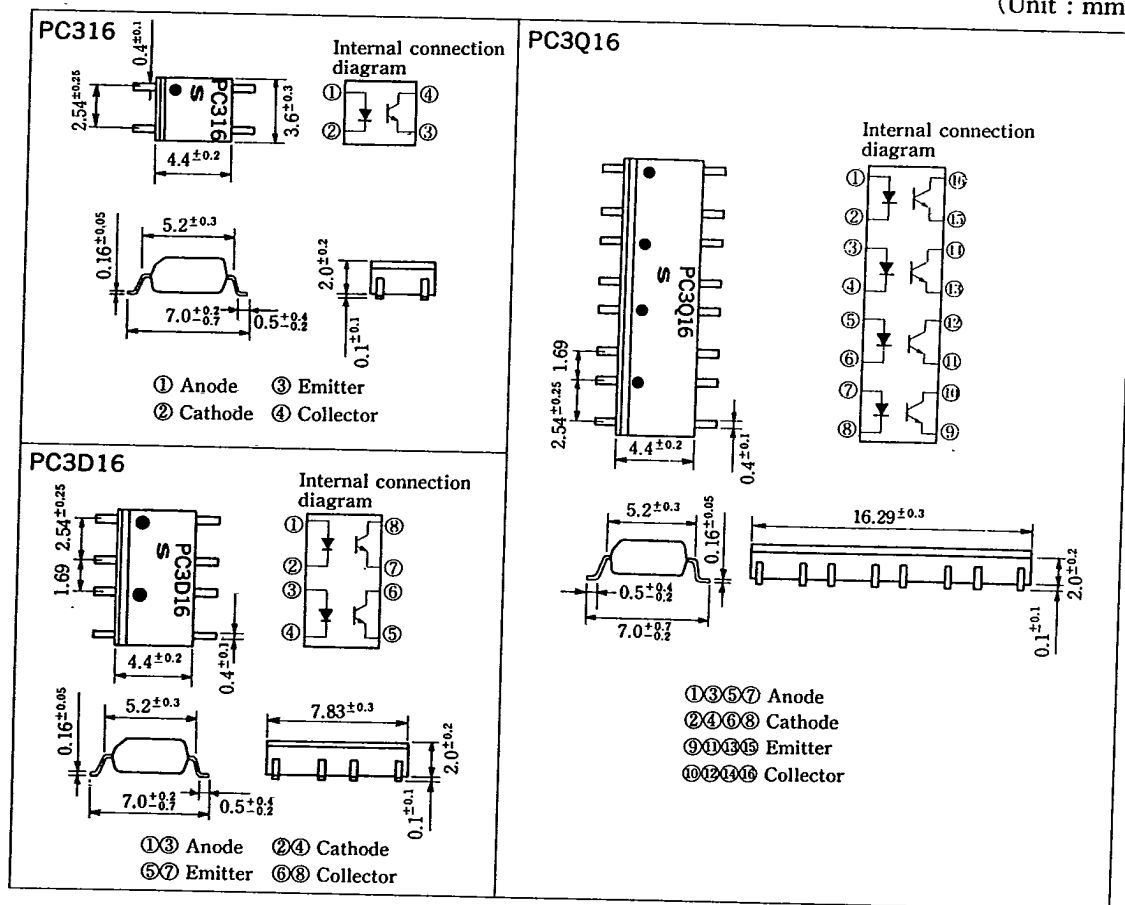

T-41-83

■ Absolute Maximum Ratings

(Ta=25°C)

Parameter		Symbol	Rating	Unit
Input	Forward current	I_F	50	mA
	*1Peak forward current	I_{FM}	1	A
	Reverse voltage	V_R	6	V
	Power dissipation	P	70	mW
Output	Collector-emitter voltage	V_{CEO}	120	V
	Emitter-collector voltage	V_{ECO}	6	V
	Collector current	I_C	50	mA
	Collector power dissipation	P_C	150	mW
	Total power dissipation	P_{tot}	170	mW
	*2Isolation voltage	V_{iso}	2,500	Vrms
Operating temperature		T_{opr}	-30 ~ +100	°C
Storage temperature		T_{stg}	-40 ~ +125	°C
*3Soldering temperature		T_{sol}	260	°C

*1 Pulse width $\leq 100\mu s$, Duty ratio = 0.001

*2 RH=40~60%, AC for 1 minute

*3 For 10 seconds

■ Electro-optical Characteristics

(Ta=25°C)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage	V_F	$I_F = 20\text{mA}$	—	1.2	1.4	V
	Reverse current	I_R	$V_R = 4\text{V}$	—	—	10	μA
	Terminal capacitance	C_t	$V = 0, f = 1\text{kHz}$	—	30	250	pF
Output	Collector dark current	I_{CEO}	$V_{CE} = 20\text{V}, I_F = 0$	—	—	10^{-7}	A
Transfer characteristics	Current transfer ratio	CTR	$I_F = 5\text{mA}, V_{CE} = 5\text{V}$	50	100	600	%
	Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_F = 20\text{mA}, I_C = 1\text{mA}$	—	0.1	0.2	V
	Isolation resistance	R_{iso}	DC500V, RH=40~60%	5×10^{10}	10^{11}	—	Ω
	Floating capacitance	C_f	$V = 0, f = 1\text{MHz}$	—	0.6	1.0	pF
	Response time (Rise)	t_r	$V_{CE} = 2\text{V}, I_C = 2\text{mA}$	—	4	18	μs
	Response time (Fall)	t_f	$R_L = 100\Omega$	—	3	18	μs

6

Fig. 1 Forward Current vs. Ambient Temperature


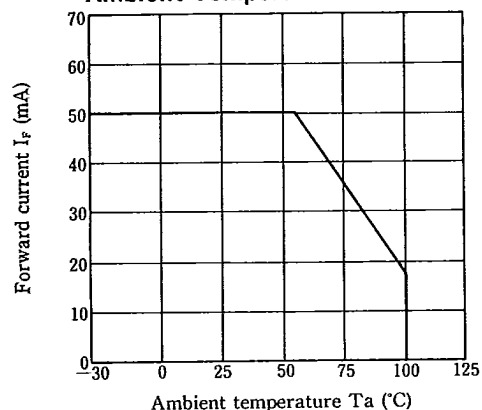


Fig. 2 Collector Power Dissipation vs. Ambient Temperature

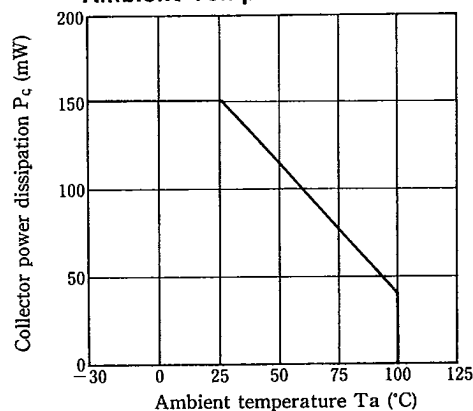

SHARP

Fig. 3 Peak Forward Current vs. Duty Ratio

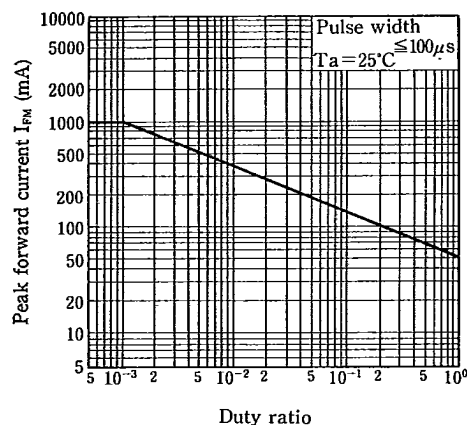


Fig. 4 Forward Current vs. Forward Voltage

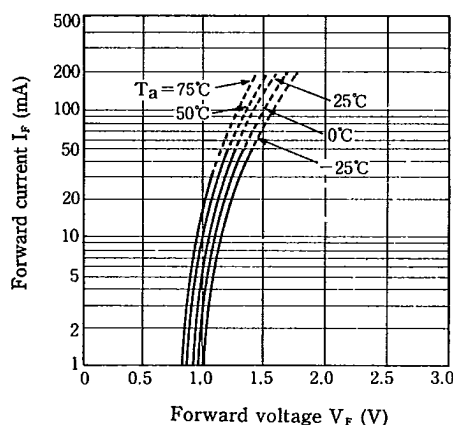


Fig. 5 Current Transfer Ratio vs. Forward Current

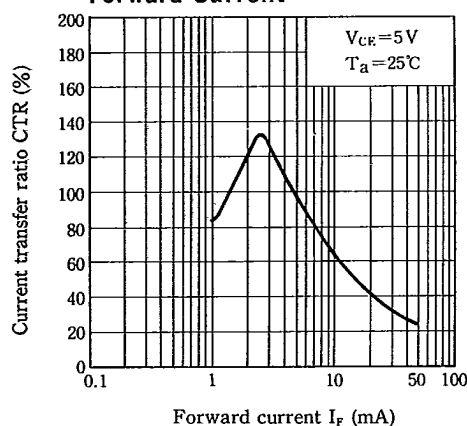


Fig. 6 Collector Current vs. Collector-emitter Voltage

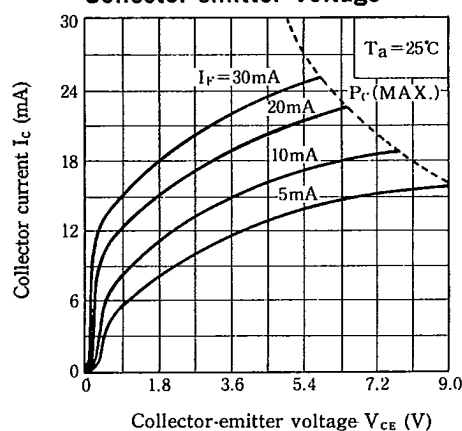


Fig. 7 Relative Current Transfer Ratio vs. Ambient Temperature

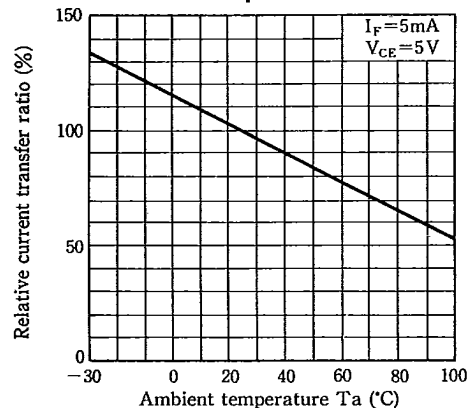


Fig. 8 Collector-emitter Saturation Voltage vs. Ambient Temperature


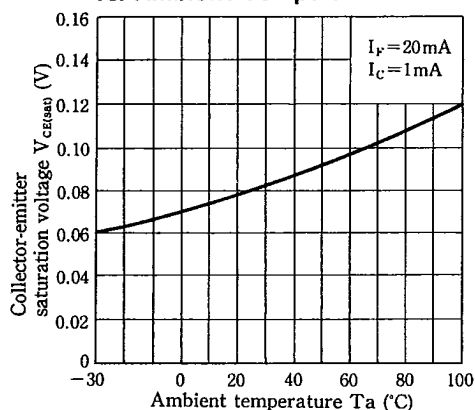


Fig. 9 Collector Dark Current vs. Ambient Temperature

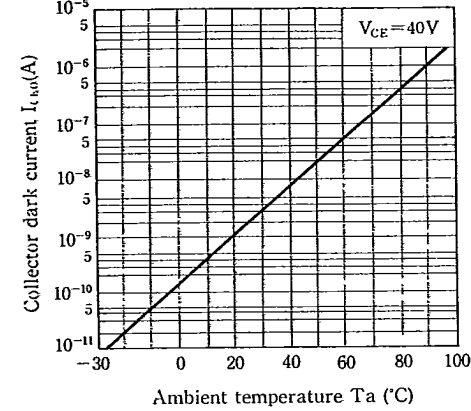

Test Circuit for Response Time

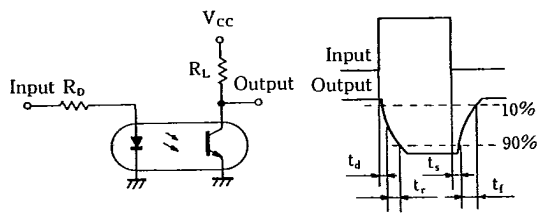


Fig. 10 Response Time vs. Load Resistance


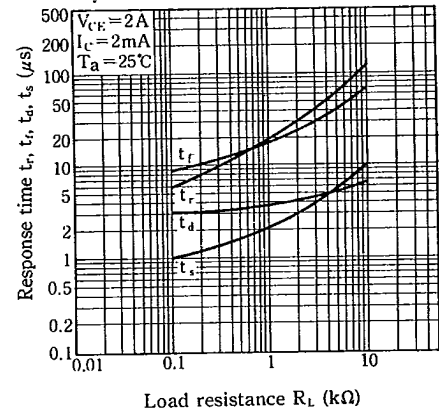


Fig. 11 Collector-emitter Saturation Voltage vs. Forward Current

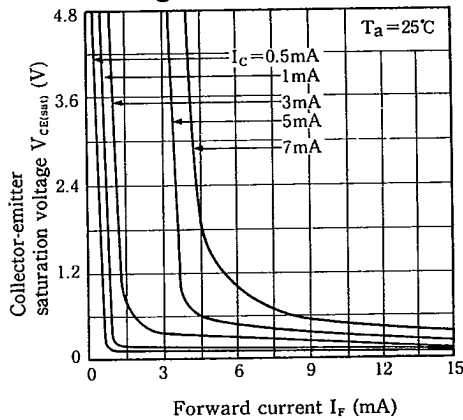

6

Package Specification of PC300 Series (1-ch type)

Model No.	Sales Unit	Package Specifications	Diameter of Reel	Tape Width
PC3 * * Z	1 pc.	Sleeve package (Net: 125 pcs.)	—	—
PC3 * *	3,000 pcs.	Taping package (Net: 3,000 pcs.)	φ370mm	12mm
PC3 * * T	750 pcs.	Taping package (Net: 750 pcs.)	φ178mm	12mm