


FIBOX


151-258

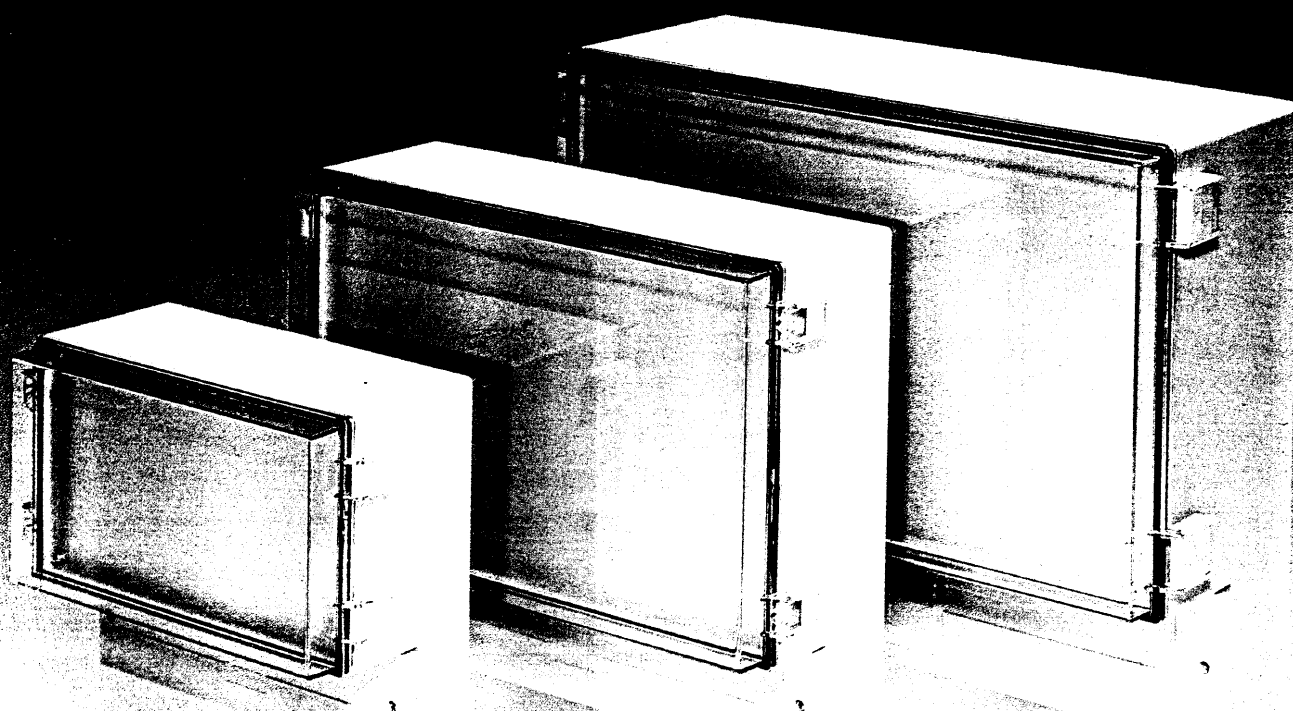

151-258/9

- IP 54-65
dust and water protection
- impact resistant
- heat resistant to +120°C
- selfextinguishing
- non-corrosive
- separate recessed
termination compartment
- lid hinges on either side
- VDE tested


FISKARS

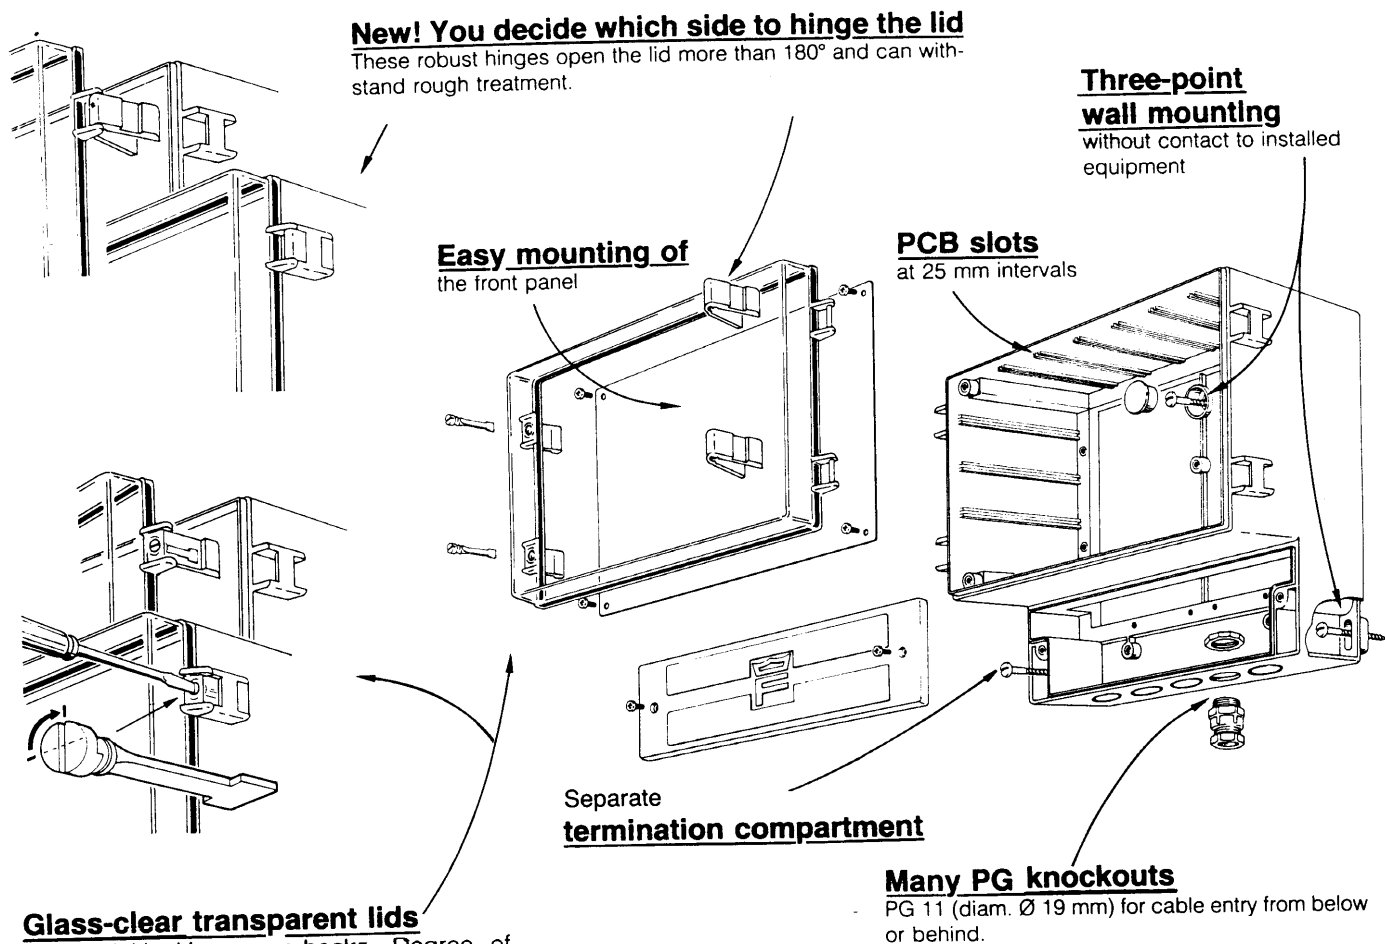



TECHNICAL DESCRIPTION	FIBOX	ABOX
Material and colour	Glass reinforced polycarbonate	ABS
Base and termination compartment cover	Light grey RAL 7035	Light grey RAL 7035
Transparent cover	polycarbonate, crystal clear	polycarbonate, crystal clear
Degree of protection acc. to IEC 529/DIN 40050	IP 65	IP 54
Flammability	VO/V2 selfextinguishing	HB/V2 fire resistant
Base/cover acc. to UL 94	5 V	—
Complete enclosure acc. to UL 746C	120°C	70°C
Max. temperature, short time	80°C	60°C
Max. operating long-term temperature		

Ordering symbols:


Complete enclosures with aluminium front panel, transparent lid		Complete enclosures, without front panel, transparent lid		Complete enclosures with front panel, without lid		Front panel separate, matt anodized aluminium, Thickness 1,5 mm	
Type	Code	Type	Code	Type	Code	Type	Code
FIBOX 21/18-1	77520023	FIBOX 21/18-0	77520018	FIBOX 21/18-B	77520030	FP 21/18	77720026
30/25-1	24	30/25-0	19	30/25-B	31	30/25	27
36/31-1	25	36/31-0	20	36/31-B	32	36/31	28
ABOX 21/18-1	77580023	ABOX 21/18-0	77580018	ABOX 21/18-B	77580030	Mounting plate, galvanized steel sheet, thickness 1,5 mm, incl. 4 screws M3 × 8	
30/25-1	24	30/25-0	19	30/25-B	31	MP 21/18	77720035
36/31-1	25	36/31-0	20	36/31-B	32	30/25	33
Enclosures are supplied complete with polyamide hinges, locking device and 6 metal screws M3 × 8 for termination compartment cover and front panel						36/31	36
						Mounting screws M3 × 8 73570642	

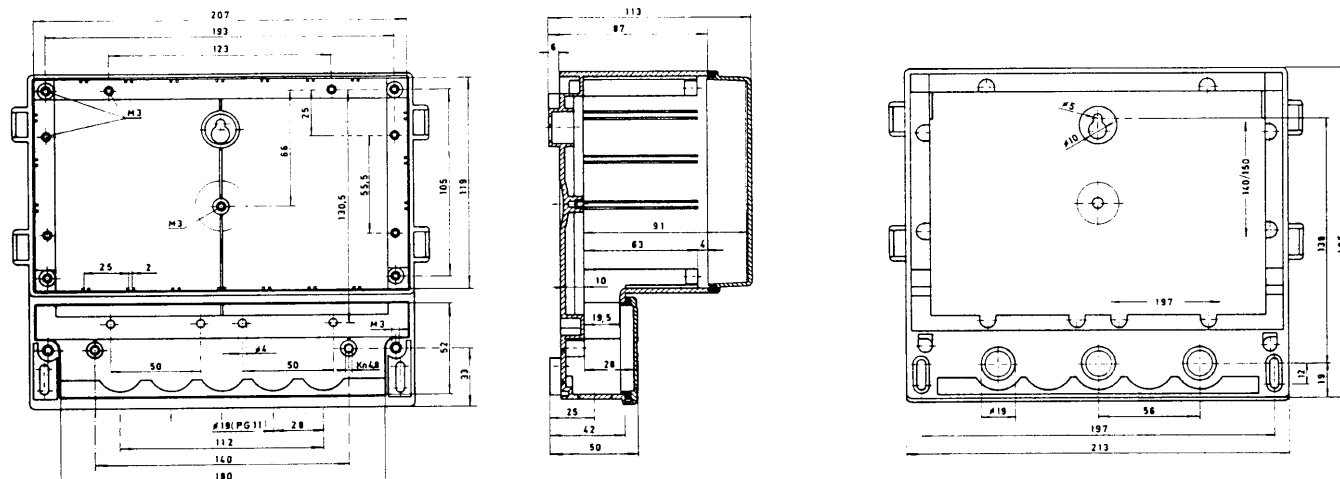FIBOX 21/18[illegible][illegible]


Exact tolerance details available on request

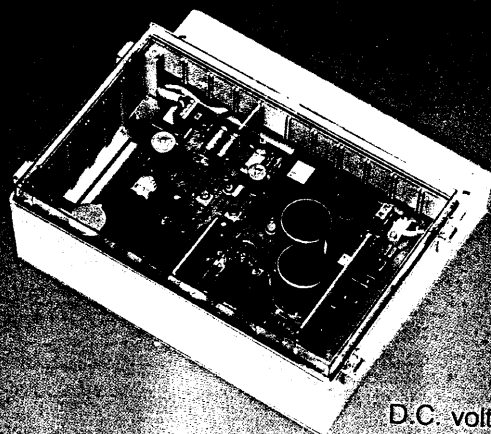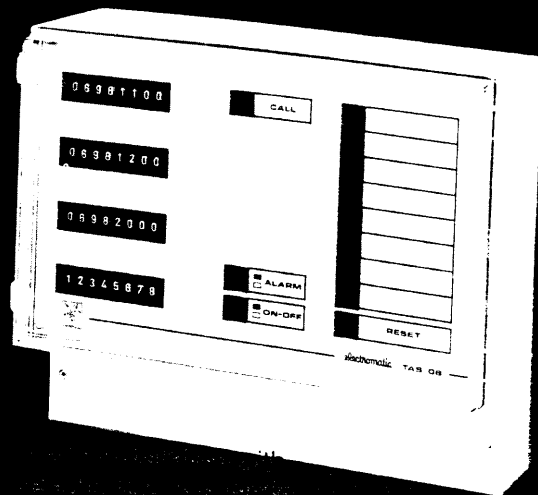


D.C. voltage supply



Speed control

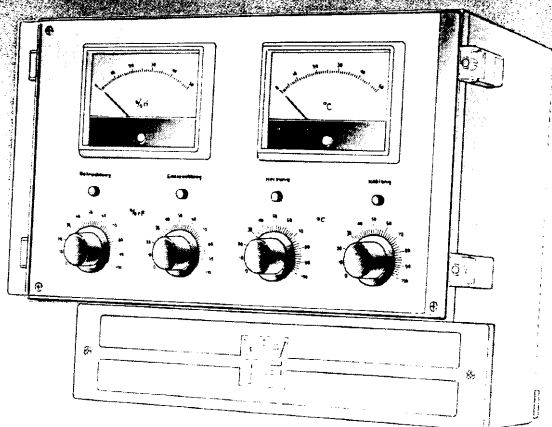


Climate regulation

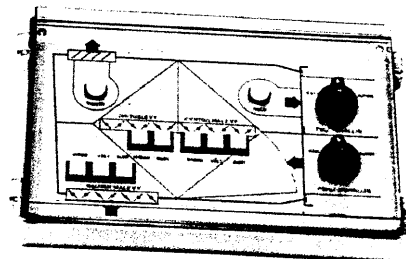

Ventilation control

BRITICENT
INTERNATIONAL



Crow Arch Lane, Ringwood, Hants
 BH24 1NZ, England
 Tel: (0425) 474617
 Telex: 418333 Fax: (0425) 471595