



This is a sample photo.

Order symbol PC 175/60 HG	
El. number	EAN-code 6418074022219
Sweden	
Denmark	
Finland 3420361	

Including


Enclosure cover with cover screws, body with mounting screws and gasket.

Product Properties

USA: NEMA 1, 4, 4X, 6, 12, 13

EURO: IP 66 (EN 60529); IK 08 (EN 50102)

MNX PC

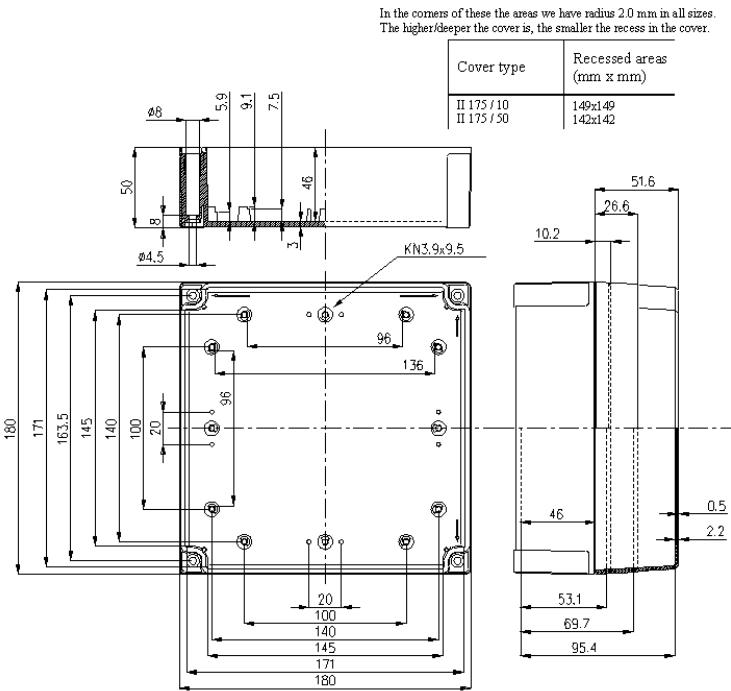

Technical Information of Product Group

Standard colour:	RAL 7035	Temp. range-in cont. use:	Max. +80 °C
Flame resistance:	UL94-5V (UL 746 C 5)	Temp. range-of material:	- 40 °C - + 120 °C

Accessories

Sealing bushing	DP 14553
Condensation water plug	MB 12189
Mounting screw	KN 3.9x9.5
Ventilation device	MB 10631
Inspection window	L 08
Cover screw	SS 14550L
Mounting plate	MIV 175
Swing door kit	HFP 180
DIN-Rail	MIV 15
DIN-Rail	MIN 15
Front plate	FP A 175/180
Hinge	TH A