

ACTIVE (DIGITAL) DELAY LINES

SERIES A01 - SINGLE DELAY

SERIES A03 - TRIPLE DELAY

- Economical cost, prompt delivery!
 - Wide varieties of values, 10nS to 500nS
 - TTL compatible
 - Operating temperature: 0°C to 70°C
 - New! Single output SIP delay line now available
- Consult factory for data sheet on SA01 series.

OPTIONS

- Non-standard delay times
- ECL and High Speed CMOS available
- Increased operating temperature range
- Tighter tolerances, faster rise times
- Trailing edge measurement
- Low power design
- Military screening per MIL-D-83532

TYPE AO1 Single Delay Line

Delay Time (nSec)	Rise Time (Max)
10±1.5	4nS
20±1.5	4nS
30±2	4nS
40±2	4nS
50±2.5	4nS
60±3	4nS
70±3.5	4nS
80±4	4nS
90±4.5	4nS
100±5	4nS
125±6.2	4nS
150±7.5	4nS
175±8.7	4nS
200±10	4nS
250±12.5	4nS
300±15	4nS
350±17.5	4nS
400±20	4nS
450±22.5	5nS
500±25	5nS

TYPE AO3 Triple Delay Line

Delay Time (nSec)*	Rise Time (Max)
10±1.5	4nS
20±1.5	4nS
30±2	4nS
40±2	4nS
50±2.5	4nS
60±3	4nS
70±3.5	4nS
80±4	4nS
90±4.5	4nS
100±5	4nS

* Available up to 250nS on special order.



HOW TO ORDER

RCD Type (A01, A01S, A03) **A01**
 Delay Time **100nS**





RCD's digital delay lines have been designed to provide precise fixed delays with all the necessary drive and pick-off circuitry. All inputs and outputs are schottky-type and require no additional components to achieve specified delays. Encapsulated construction utilizes a molded DIP case designed to meet or exceed all applicable environmental requirements of Mil-D-23859. Type AO1 features a single fixed delay time, whereas Type AO3 features three isolated delays.



TYPE AO1 - STANDARD (Also available in SIP package)

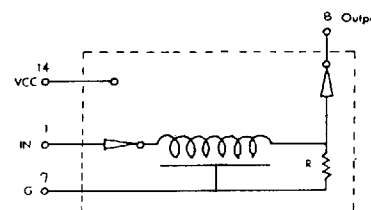

TYPE AO1S - MINIATURE (Also available in a molded auto-insertable design)

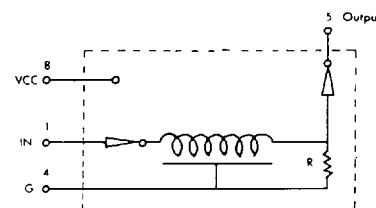

TYPE AO3 TRIPLE DELAY (Also available in double and quadruple delays)

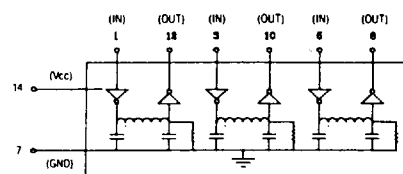

TEST CONDITIONS @25°C

- 1) Input test pulse voltage: 3.2V
- 2) Input pulse width: 3× the total delay
- 3) Input rise time: 2.0nSec
- 4) Delay measured at 1.5V on leading edge only with no loads on output
- 5) Rise time measured from 0.75V to 2.4V
- 6) Pulse period: 3× pulse width minimum

RCD Components, Inc., 520 East Industrial Park Dr., Manchester, NH USA 03109-1824

Tel: (603) 669-0054

Fax: (603) 669-5455