

AC/DC

6 Watts

Single/Dual Outputs


CM, ED, P, PA Series

- High performance design
- Ultra-low noise 1 mV RMS (Pard)
- 100 kHz switching regulation of 0.01%
- Continuous short circuit protection

The P, PA and CM Series boast over a decade of reliable, field proven service and are the recognized industry standard for high performance AC/DC power supplies. The PA Series is equipped with industry standard 2.2" pin spacing while the P Series is 2.0".

The CM Series are high performance chassis mount versions employing a top-mounted, five terminal barrier strip for power entry and exit. These units are ideal for systems that are best implemented with "hard wire" power cabling techniques. Features include MTBF's of greater than 150,000 hours, lower case temperature rise (to 18°C cooler) and the high in-circuit performance. This higher efficiency results in lower ambient temperatures and greater system reliability. Dual output tracking is standard.

The ED Series delivers 180 Vdc outputs for powering a variety of the more widely used plasma digital displays. The components used in the ED Series allow use of over broad temperature ranges with a high degree of stability.

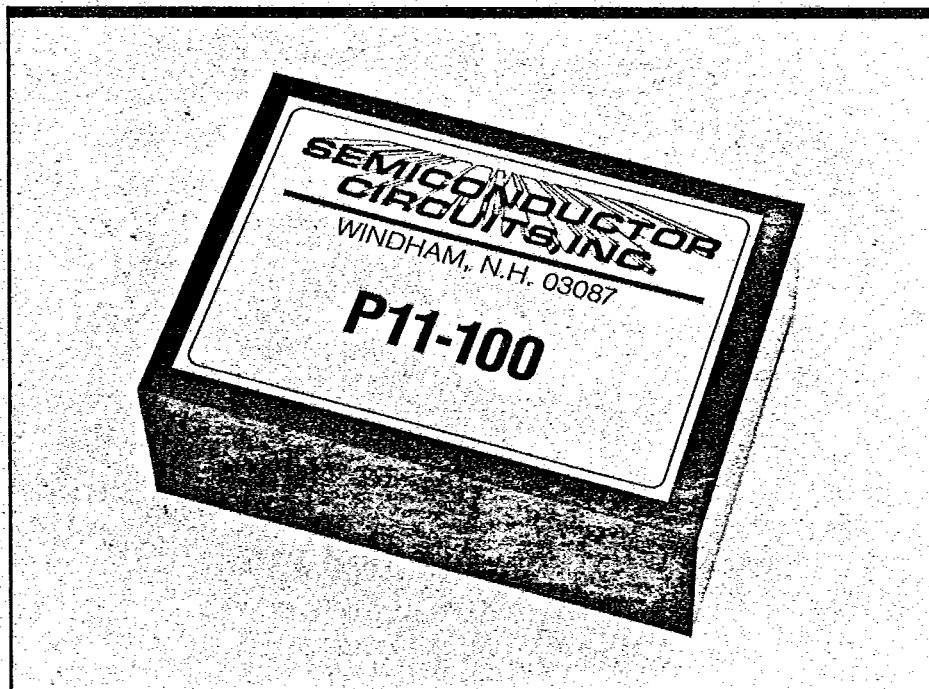

Specifications

INPUT

Voltage and Frequency

105 to 125 Vac - 50 to 440 Hz (standard)
200 to 252 Vac - 50 to 60 Hz Add Suffix I
90 to 110 Vac - 50 to 60 Hz Add Suffix N
105 to 125/210 to 250 Vac Add Suffix K2

OUTPUT

Voltage Tolerance

± 1% (Fixed) P
± 2% (Fixed) ED, PA, CM

Ripple and Noise

1 mV RMS*

Dual Tracking

1 mV/mV (typ)

Temperature Coefficient

0.02%/°C max.

*30 mV RMS - ED Series

GENERAL

I/O Isolation

Voltage 1500 V RMS
2500 Vac - Suffix I (200 to 252 Vac only)

ENVIRONMENTAL

Operating Temperature Range -25°C to +71°C (No derating)

Storage Temperature Range -40°C to +85°C

**SEMICONDUCTOR
CIRCUITS, INC.**

SUBSIDIARY OF EMERSON ELECTRIC CO.

All specifications are typical at nominal line and full load at 25° unless otherwise noted.

T-57-05

†NOTE: ± 300 mA units feature standard foldback current limiting

FAX (603) 893-6280