



BIM 9000 SERIES

Small enclosures made of rugged plastic for mounting modules, components, and standardised and non-standardised PCBs 1.6 mm thick.

Scope of supply and colours:

Delivery is made in the form of a kit containing single parts, including assembly instructions.



Enclosures shells in granito: light grey (similar to RAL 7035) with fine dark grey inclusions.

Front and rear panels in anthracite (similar to RAL 7016).

Other accessories:

(Please request more details)

- Acrylic front panel with parallel assembly panel (sandwich construction)
- Power adapter cover
- Carrying and installation handles
- Adhesive rubber feet
- Mounting frame for 19" rack standard available for enclosure models marked by *

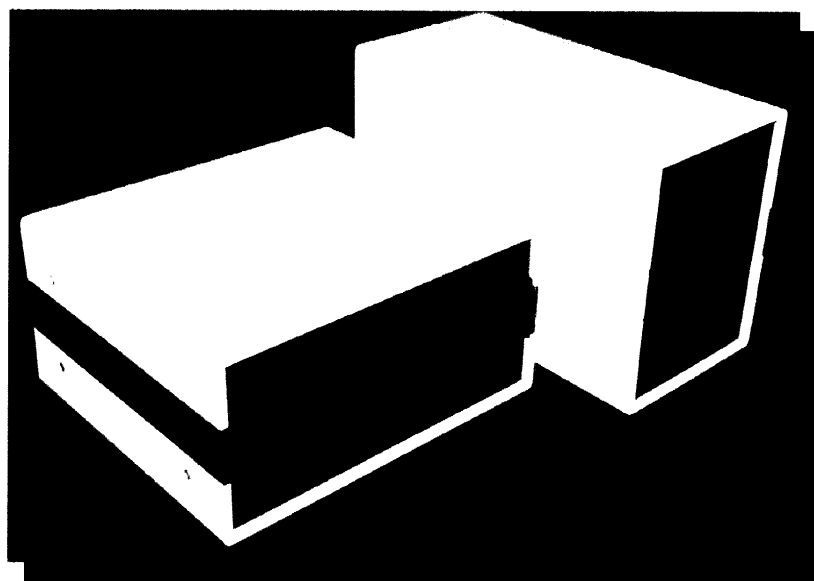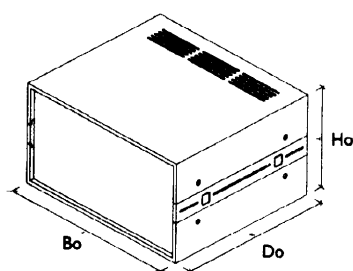

Order number	Wall thickness	Outer dimensions of enclosure			Board insert	
		Bo	Ho	Do	Width	Depth
9001-202-02	3	60.5	34	97.5	50	81
9002-303-03	4	112.5	48.5	178.5	100	121
9003-303-05	4	112.5	48.5	228.5	100	212
9004-304-03	4	112.5	70.7	178.5	100	121
9005-304-05	4	112.5	70.7	228.5	100	212
9006-305-03	4	112.5	93	178.5	100	121
9007-305-05	4	112.5	93	228.5	100	212
9008-306-03*	4	112.5	137.5	178.5	100	121
9009-306-05*	4	112.5	137.5	228.5	100	212
9010-403-03	4	172.5	48.5	178.5	160	121
9011-403-05	4	172.5	48.5	228.5	160	212
9012-404-03	4	172.5	70.7	178.5	160	121
9013-404-05	4	172.5	70.7	228.5	160	212
9014-405-03	4	172.5	93	178.5	160	121
9015-405-05	4	172.5	93	228.5	160	212
9016-406-03	4	172.5	137.5	178.5	160	121
9017-406-05*	4	172.5	137.5	228.5	160	212
9018-503-03	4	202.5	48.5	178.5	190	121
9019-503-05	4	202.5	48.5	228.5	190	212
9020-504-03	4	202.5	70.7	178.5	190	121
9021-504-05	4	202.5	70.7	228.5	190	212
9022-505-03	4	202.5	93	178.5	190	121
9023-505-05	4	202.5	93	228.5	190	212
9024-506-03*	4	202.5	137.5	178.5	190	121
9025-506-05*	4	202.5	137.5	228.5	190	212
9026-603-03	4	246	48.5	178.5	233.5	121
9027-603-05	4	246	48.5	228.5	233.5	212
9028-604-03	4	246	70.7	178.5	233.5	121
9029-604-05	4	246	70.7	228.5	233.5	212
9030-605-03	4	246	93	178.5	233.5	121
9031-605-05	4	246	93	228.5	233.5	212
9032-606-03	4	246	137.5	178.5	233.5	121
9033-606-05	4	246	137.5	228.5	233.5	212

The useful interior space is calculated from the outer dimensions:

Wall thickness of enclosure shells: 3mm

Bi = Bo – 14 mm, Hi = Ho – 6 mm, Di = Do – 16 mm

Wall thickness of enclosure shells: 4mm

Bi = Bo – 16 mm, Hi = Ho – 8 mm, Di = Do – 16 mm