

Index of /ds/P6/

Name	Last modified	Size	Description
 Parent Directory			
 P6KE100A.pdf	22-Dec-99 00:14	56K	
 P6KE100CA.pdf	22-Dec-99 00:14	56K	
 P6KE100 C A.pdf	24-Jun-98 00:00	53K	
 P6KE10A.pdf	22-Dec-99 00:14	56K	
 P6KE10CA.pdf	22-Dec-99 00:14	56K	
 P6KE10 C A.pdf	24-Jun-98 00:00	53K	
 P6KE110A.pdf	22-Dec-99 00:14	56K	
 P6KE110CA.pdf	22-Dec-99 00:14	56K	
 P6KE110 C A.pdf	24-Jun-98 00:00	53K	
 P6KE11A.pdf	22-Dec-99 00:14	56K	
 P6KE11CA.pdf	22-Dec-99 00:14	56K	
 P6KE11 C A.pdf	24-Jun-98 00:00	53K	
 P6KE120A.pdf	22-Dec-99 00:14	56K	
 P6KE120CA.pdf	22-Dec-99 00:14	56K	
 P6KE120 C A.pdf	24-Jun-98 00:00	53K	
 P6KE12A.pdf	22-Dec-99 00:14	56K	
 P6KE12CA.pdf	22-Dec-99 00:14	56K	
 P6KE12 C A.pdf	24-Jun-98 00:00	53K	
 P6KE130A.pdf	22-Dec-99 00:14	56K	
 P6KE130CA.pdf	22-Dec-99 00:14	56K	
 P6KE130 C A.pdf	24-Jun-98 00:00	53K	
 P6KE13A.pdf	22-Dec-99 00:14	56K	
 P6KE13CA.pdf	22-Dec-99 00:14	56K	

 P6KE13_C_A.pdf	24-Jun-98 00:00	53K
 P6KE150A.pdf	22-Dec-99 00:14	56K
 P6KE150CA.pdf	22-Dec-99 00:14	56K
 P6KE150_C_A.pdf	24-Jun-98 00:00	53K
 P6KE15A.pdf	22-Dec-99 00:14	56K
 P6KE15CA.pdf	22-Dec-99 00:14	56K
 P6KE15_C_A.pdf	24-Jun-98 00:00	53K
 P6KE160A.pdf	22-Dec-99 00:14	56K
 P6KE160CA.pdf	22-Dec-99 00:14	56K
 P6KE160_C_A.pdf	24-Jun-98 00:00	53K
 P6KE16A.pdf	22-Dec-99 00:14	56K
 P6KE16CA.pdf	22-Dec-99 00:14	56K
 P6KE16_C_A.pdf	24-Jun-98 00:00	53K
 P6KE170A.pdf	22-Dec-99 00:14	56K
 P6KE170CA.pdf	22-Dec-99 00:14	56K
 P6KE170_C_A.pdf	24-Jun-98 00:00	53K
 P6KE180A.pdf	22-Dec-99 00:14	56K
 P6KE180CA.pdf	22-Dec-99 00:14	56K
 P6KE180_C_A.pdf	24-Jun-98 00:00	53K
 P6KE18A.pdf	22-Dec-99 00:14	56K
 P6KE18CA.pdf	22-Dec-99 00:14	56K
 P6KE18_C_A.pdf	24-Jun-98 00:00	53K
 P6KE200A.pdf	22-Dec-99 00:14	56K
 P6KE200CA.pdf	22-Dec-99 00:14	56K
 P6KE200_C_A.pdf	24-Jun-98 00:00	53K
 P6KE20A.pdf	22-Dec-99 00:14	56K
 P6KE20CA.pdf	22-Dec-99 00:14	56K

 P6KE20_C_A.pdf	24-Jun-98 00:00	53K
 P6KE220A.pdf	22-Dec-99 00:14	56K
 P6KE220CA.pdf	22-Dec-99 00:14	56K
 P6KE220_C_A.pdf	24-Jun-98 00:00	53K
 P6KE22A.pdf	22-Dec-99 00:14	56K
 P6KE22CA.pdf	22-Dec-99 00:14	56K
 P6KE22_C_A.pdf	24-Jun-98 00:00	53K
 P6KE24A.pdf	22-Dec-99 00:14	56K
 P6KE24CA.pdf	22-Dec-99 00:14	56K
 P6KE24_C_A.pdf	24-Jun-98 00:00	53K
 P6KE250A.pdf	22-Dec-99 00:14	56K
 P6KE250CA.pdf	22-Dec-99 00:14	56K
 P6KE250_C_A.pdf	24-Jun-98 00:00	53K
 P6KE27A.pdf	22-Dec-99 00:14	56K
 P6KE27CA.pdf	22-Dec-99 00:14	56K
 P6KE27_C_A.pdf	24-Jun-98 00:00	53K
 P6KE300A.pdf	22-Dec-99 00:14	56K
 P6KE300CA.pdf	22-Dec-99 00:14	56K
 P6KE300_C_A.pdf	24-Jun-98 00:00	53K
 P6KE30A.pdf	22-Dec-99 00:14	56K
 P6KE30CA.pdf	22-Dec-99 00:14	56K
 P6KE30_C_A.pdf	24-Jun-98 00:00	53K
 P6KE33A.pdf	22-Dec-99 00:14	56K
 P6KE33CA.pdf	22-Dec-99 00:14	56K
 P6KE33_C_A.pdf	24-Jun-98 00:00	53K
 P6KE350A.pdf	22-Dec-99 00:14	56K
 P6KE350CA.pdf	22-Dec-99 00:14	56K

 P6KE350_C_A.pdf	24-Jun-98 00:00	53K
 P6KE36A.pdf	22-Dec-99 00:14	56K
 P6KE36CA.pdf	22-Dec-99 00:14	56K
 P6KE36_C_A.pdf	24-Jun-98 00:00	53K
 P6KE39A.pdf	22-Dec-99 00:14	56K
 P6KE39CA.pdf	22-Dec-99 00:14	56K
 P6KE39_C_A.pdf	24-Jun-98 00:00	53K
 P6KE400A.pdf	22-Dec-99 00:14	56K
 P6KE400CA.pdf	22-Dec-99 00:14	56K
 P6KE400_C_A.pdf	24-Jun-98 00:00	53K
 P6KE43A.pdf	22-Dec-99 00:14	56K
 P6KE43CA.pdf	22-Dec-99 00:14	56K
 P6KE43_C_A.pdf	24-Jun-98 00:00	53K
 P6KE440A.pdf	22-Dec-99 00:14	56K
 P6KE440CA.pdf	22-Dec-99 00:14	56K
 P6KE440_C_A.pdf	24-Jun-98 00:00	53K
 P6KE47A.pdf	22-Dec-99 00:14	56K
 P6KE47CA.pdf	22-Dec-99 00:14	56K
 P6KE47_C_A.pdf	24-Jun-98 00:00	53K
 P6KE51A.pdf	22-Dec-99 00:14	56K
 P6KE51CA.pdf	22-Dec-99 00:14	56K
 P6KE51_C_A.pdf	24-Jun-98 00:00	53K
 P6KE56A.pdf	22-Dec-99 00:14	56K
 P6KE56CA.pdf	22-Dec-99 00:14	56K
 P6KE56_C_A.pdf	24-Jun-98 00:00	53K
 P6KE6.8A.pdf	22-Dec-99 00:14	56K
 P6KE6.8CA.pdf	22-Dec-99 00:14	56K

 P6KE6.8_C_A.pdf	24-Jun-98 00:00	53K
 P6KE62A.pdf	22-Dec-99 00:14	56K
 P6KE62CA.pdf	22-Dec-99 00:14	56K
 P6KE62_C_A.pdf	24-Jun-98 00:00	53K
 P6KE68A.pdf	22-Dec-99 00:14	56K
 P6KE68CA.pdf	22-Dec-99 00:14	56K
 P6KE68_C_A.pdf	24-Jun-98 00:00	53K
 P6KE7.5A.pdf	22-Dec-99 00:14	56K
 P6KE7.5CA.pdf	22-Dec-99 00:14	56K
 P6KE7.5_C_A.pdf	24-Jun-98 00:00	53K
 P6KE75A.pdf	22-Dec-99 00:14	56K
 P6KE75CA.pdf	22-Dec-99 00:14	56K
 P6KE75_C_A.pdf	24-Jun-98 00:00	53K
 P6KE8.2A.pdf	22-Dec-99 00:14	56K
 P6KE8.2CA.pdf	22-Dec-99 00:14	56K
 P6KE8.2_C_A.pdf	24-Jun-98 00:00	53K
 P6KE82A.pdf	22-Dec-99 00:14	56K
 P6KE82CA.pdf	22-Dec-99 00:14	56K
 P6KE82_C_A.pdf	24-Jun-98 00:00	53K
 P6KE9.1A.pdf	22-Dec-99 00:14	56K
 P6KE9.1CA.pdf	22-Dec-99 00:14	56K
 P6KE9.1_C_A.pdf	24-Jun-98 00:00	53K
 P6KE91A.pdf	22-Dec-99 00:14	56K
 P6KE91CA.pdf	22-Dec-99 00:14	56K
 P6KE91_C_A.pdf	24-Jun-98 00:00	53K

P6KE6.8(C)A - P6KE440(C)A


Features

- Glass passivated junction.
- 600W Peak Pulse Power capability at 1.0 ms.
- Excellent clamping capability.
- Low incremental surge resistance.
- Fast response time; typically less than 1.0 ps from 0 volts to BV for unidirectional and 5.0 ns for bidirectional.
- Typical I_R less than 1.0 μA above 10V.



DO-15

COLOR BAND DENOTES CATHODE
EXCEPT BIPOLAR



DEVICES FOR BIPOLAR APPLICATIONS

- Bidirectional types use CA suffix.
- Electrical Characteristics apply in both directions.

600 Watt Transient Voltage Suppressors

Absolute Maximum Ratings*

$T_A = 25^\circ C$ unless otherwise noted

Symbol	Parameter	Value	Units
P_{PPM}	Peak Pulse Power Dissipation at $T_A=25^\circ C$, $T_P=1ms$	minimum 600	W
I_{PPM}	Peak Pulse Current	see table	A
P_D	Steady State Power Dissipation .375 " lead length @ $T_A = 75^\circ C$	5.0	W
$I_{f(surge)}$	Peak Forward Surge Current superimposed on rated load (JEDEC method) (Note 1)	100	A
T_{stg}	Storage Temperature Range	-65 to +175	$^\circ C$
T_J	Operating Junction Temperature	-65 to +175	$^\circ C$

*These ratings are limiting values above which the serviceability of any semiconductor device may be impaired.

Note 1: Measured on 8.3 ms single half-sine wave; Duty cycle = 4 pulses per minute maximum.

Transient Voltage Suppressors

(continued)

Electrical Characteristics

$T_A = 25^\circ\text{C}$ unless otherwise noted

Uni-directional Bi-directional (C) Device	Reverse Stand-off Voltage V_{RWM} (V)	Breakdown Voltage V_{BR} (V)		Test Current I_T (mA)	Max Clamping Voltage @ IPPM V_C (V)	Max Peak Pulse Surge Current I_{PPM} (A)	Max Reverse Leakage V_{RWM} I_R (uA)*
P6KE6.8(C)A	5.80	6.45	7.14	10	10.5	57.1	1000
P6KE7.5(C)A	6.40	7.13	7.88	1	11.3	53.1	500
P6KE8.2(C)A	7.02	7.79	8.61	1	12.1	50.0	200
P6KE9.1(C)A	7.78	8.65	9.55	1	13.4	45.0	50
P6KE10(C)A	8.55	9.50	10.5	1	14.5	41.0	10
P6KE11(C)A	9.4	10.5	11.6	1	15.6	38.0	5
P6KE12(C)A	10.2	11.4	12.6	1	16.7	36.0	5
P6KE13(C)A	11.1	12.4	13.7	1	18.2	33.0	5
P6KE15(C)A	12.8	14.3	15.8	1	21.2	28.0	5
P6KE16(C)A	13.6	15.2	16.8	1	22.5	27.0	5
P6KE18(C)A	15.3	17.1	18.9	1	25.2	24.0	5
P6KE20(C)A	17.1	19.0	21.0	1	27.7	22.0	5
P6KE22(C)A	18.8	20.9	23.1	1	30.6	20.0	5
P6KE24(C)A	20.5	22.8	25.2	1	33.2	18.1	5
P6KE27(C)A	23.1	25.7	28.4	1	37.5	16.0	5
P6KE30(C)A	25.6	28.5	31.5	1	41.4	14.5	5
P6KE33(C)A	28.2	31.4	34.7	1	45.7	13.2	5
P6KE36(C)A	30.8	34.2	37.8	1	49.9	12.0	5
P6KE39(C)A	33.3	37.1	41.0	1	53.9	11.2	5
P6KE43(C)A	36.8	40.9	45.2	1	59.3	10.1	5
P6KE47(C)A	40.2	44.7	49.4	1	64.8	9.3	5
P6KE51(C)A	43.6	48.5	53.6	1	70.1	8.6	5
P6KE56(C)A	47.8	53.2	58.8	1	77.0	7.8	5
P6KE62(C)A	53.0	58.9	65.1	1	85.0	7.1	5
P6KE68(C)A	58.1	64.6	71.4	1	92.0	6.5	5
P6KE75(C)A	64.1	71.3	78.8	1	103.0	5.8	5
P6KE82(C)A	70.1	77.9	86.1	1	113.0	5.3	5
P6KE91(C)A	77.8	86.5	95.5	1	125.0	4.8	5
P6KE100(C)A	85.5	95.0	105.0	1	137.0	4.4	5
P6KE110(C)A	94.0	105.0	116.0	1	152.0	4.0	5
P6KE120(C)A	102.0	114.0	126.0	1	165.0	3.6	5
P6KE130(C)A	111.0	124.0	137.0	1	179.0	3.4	5
P6KE150(C)A	128.0	143.0	158.0	1	207.0	2.9	5
P6KE160(C)A	136.0	152.0	168.0	1	219.0	2.7	5
P6KE170(C)A	145.0	162.0	179.0	1	234.0	2.6	5
P6KE180(C)A	154.0	171.0	189.0	1	246.0	2.4	5
P6KE200(C)A	171.0	190.0	210.0	1	274.0	2.2	5
P6KE220(C)A	185.0	209.0	231.0	1	328.0	1.9	5
P6KE250(C)A	214.0	237.0	263.0	1	344.0	1.8	5
P6KE300(C)A	256.0	285.0	315.0	1	414.0	1.5	5
P6KE350(C)A	300.0	332.0	368.0	1	482.0	1.3	5
P6KE400(C)A	342.0	380.0	420.0	1	548.0	1.1	5
P6KE440(C)A	376.0	418.0	462.0	1	602.0	1.0	5

* For bidirectional parts with $V_{RWM} < 10\text{V}$, the I_R max limit is doubled.


P6KE6.8(C)A - P6KE440(C)A

Transient Voltage Suppressors (continued)


P6KE6.8(C)A - P6KE440(C)A

Typical Characteristics


Peak Pulse Power Rating Curve

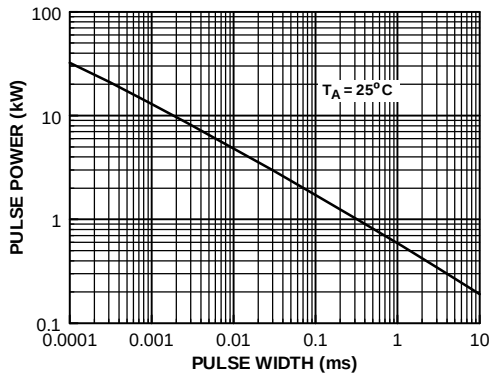


Pulse Derating Curve

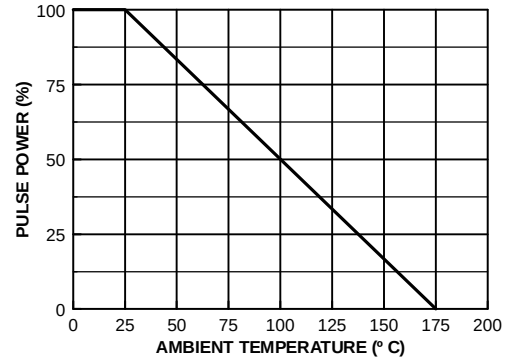


Pulse Waveform

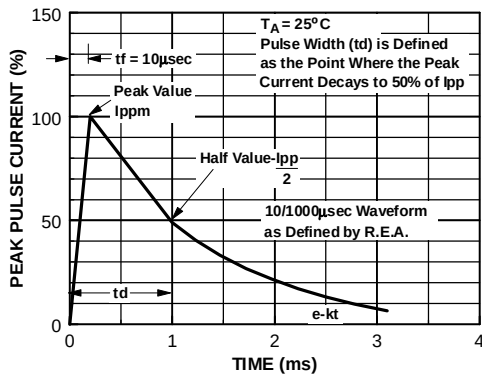


Junction Capacitance - Unidirectional

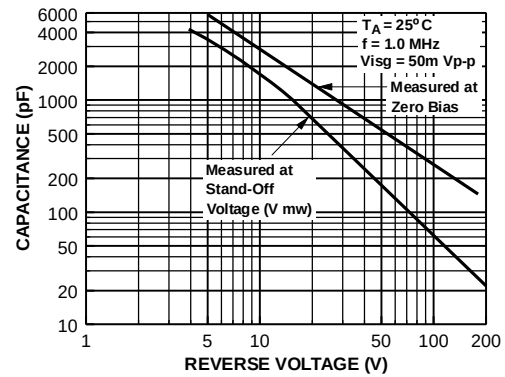

Steady State Power Derating Curve

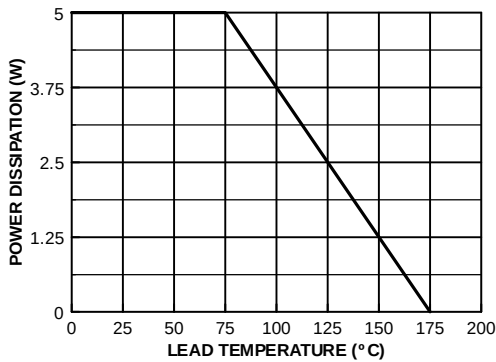


Non-Repetitive Surge Current

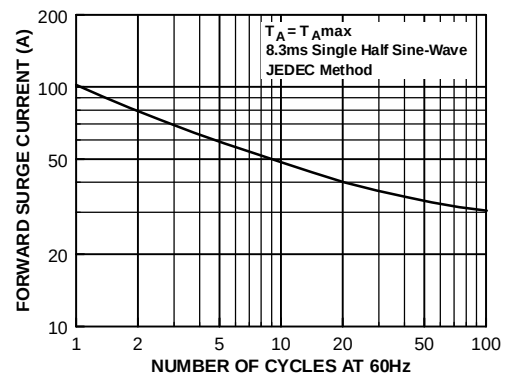

DO-15 Package Dimensions




DO-15 (FS PKG Code P2)

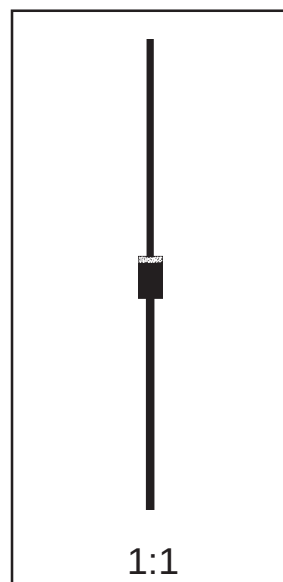

Scale 1:1 on letter size paper

Dimensions shown below are in:
inches [millimeters]

Part Weight per unit (gram): 0.4

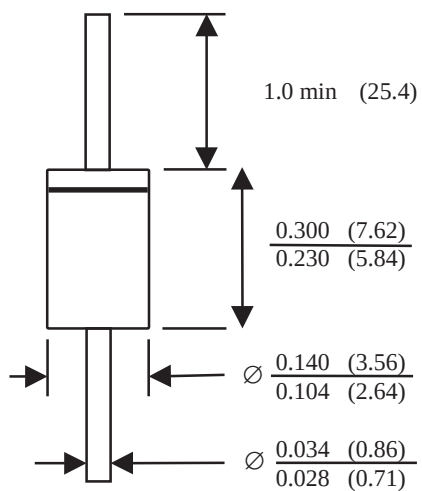

TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACE ^x ™	ISOP ^l ANAR™	UHC™
CoolFET™	MICROWIRE™	VCX™
CROSSVOLT™	POP™	
E ² CMOS™	PowerTrench™	
FACT™	QS™	
FACT Quiet Series™	Quiet Series™	
FAST [®]	SuperSOT™-3	
FAST ^r ™	SuperSOT™-6	
GTO™	SuperSOT™-8	
HiSeC™	TinyLogic™	

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

PRODUCT STATUS DEFINITIONS

Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.

P6KE6.8(C)A - P6KE440(C)A


Features

- Glass passivated junction.
- 600W Peak Pulse Power capability at 1.0 ms.
- Excellent clamping capability.
- Low incremental surge resistance.
- Fast response time; typically less than 1.0 ps from 0 volts to BV for unidirectional and 5.0 ns for bidirectional.
- Typical I_R less than 1.0 mA above 10V.



DO-15

COLOR BAND DENOTES CATHODE



DEVICES FOR BIPOLAR APPLICATIONS

- Bidirectional types use CA suffix.
- Electrical Characteristics apply in both directions.

600 Watt Transient Voltage Suppressors

Absolute Maximum Ratings*

$T_A = 25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Value	Units
P_{PPM}	Peak Pulse Power Dissipation at $T_A=25^\circ\text{C}$, $T_P=1\text{ms}$	minimum 600	W
I_{PPM}	Peak Pulse Current	see table	A
P_D	Steady State Power Dissipation .375 " lead length @ $T_A = 75^\circ\text{C}$	5.0	W
$i_{f(\text{surge})}$	Peak Forward Surge Current superimposed on rated load (JEDEC method) (Note 1)	100	A
T_{stg}	Storage Temperature Range	-65 to +175	$^\circ\text{C}$
T_J	Operating Junction Temperature	-65 to +175	$^\circ\text{C}$

*These ratings are limiting values above which the serviceability of any semiconductor device may be impaired.

Note 1: Measured on 8.3 ms single half-sine wave; Duty cycle = 4 pulses per minute maximum.

Transient Voltage Suppressors

(continued)

Electrical Characteristics

$T_A = 25^\circ\text{C}$ unless otherwise noted

Uni-directional Bi-directional (C) Device	Reverse Stand-off Voltage V_{RWM} (V)	Breakdown Voltage V_{BR} (V)		Test Current I_T (mA)	Max Clamping Voltage @ IPPM V_C (V)	Max Peak Pulse Surge Current I_{PPM} (A)	Max Reverse Leakage V_{RWM} I_R (uA)*
P6KE6.8(C)A	5.80	6.45	7.14	10	10.5	57.1	1000
P6KE7.5(C)A	6.40	7.13	7.88	1	11.3	53.1	500
P6KE8.2(C)A	7.02	7.79	8.61	1	12.1	50.0	200
P6KE9.1(C)A	7.78	8.65	9.55	1	13.4	45.0	50
P6KE10(C)A	8.55	9.50	10.5	1	14.5	41.0	10
P6KE11(C)A	9.4	10.5	11.6	1	15.6	38.0	5
P6KE12(C)A	10.2	11.4	12.6	1	16.7	36.0	5
P6KE13(C)A	11.1	12.4	13.7	1	18.2	33.0	5
P6KE15(C)A	12.8	14.3	15.8	1	21.2	28.0	5
P6KE16(C)A	13.6	15.2	16.8	1	22.5	27.0	5
P6KE18(C)A	15.3	17.1	18.9	1	25.2	24.0	5
P6KE20(C)A	17.1	19.0	21.0	1	27.7	22.0	5
P6KE22(C)A	18.8	20.9	23.1	1	30.6	20.0	5
P6KE24(C)A	20.5	22.8	25.2	1	33.2	18.1	5
P6KE27(C)A	23.1	25.7	28.4	1	37.5	16.0	5
P6KE30(C)A	25.6	28.5	31.5	1	41.4	14.5	5
P6KE33(C)A	28.2	31.4	34.7	1	45.7	13.2	5
P6KE36(C)A	30.8	34.2	37.8	1	49.9	12.0	5
P6KE39(C)A	33.3	37.1	41.0	1	53.9	11.2	5
P6KE43(C)A	36.8	40.9	45.2	1	59.3	10.1	5
P6KE47(C)A	40.2	44.7	49.4	1	64.8	9.3	5
P6KE51(C)A	43.6	48.5	53.6	1	70.1	8.6	5
P6KE56(C)A	47.8	53.2	58.8	1	77.0	7.8	5
P6KE62(C)A	53.0	58.9	65.1	1	85.0	7.1	5
P6KE68(C)A	58.1	64.6	71.4	1	92.0	6.5	5
P6KE75(C)A	64.1	71.3	78.8	1	103.0	5.8	5
P6KE82(C)A	70.1	77.9	86.1	1	113.0	5.3	5
P6KE91(C)A	77.8	86.5	95.5	1	125.0	4.8	5
P6KE100(C)A	85.5	95.0	105.0	1	137.0	4.4	5
P6KE110(C)A	94.0	105.0	116.0	1	152.0	4.0	5
P6KE120(C)A	102.0	114.0	126.0	1	165.0	3.6	5
P6KE130(C)A	111.0	124.0	137.0	1	179.0	3.4	5
P6KE150(C)A	128.0	143.0	158.0	1	207.0	2.9	5
P6KE160(C)A	136.0	152.0	168.0	1	219.0	2.7	5
P6KE170(C)A	145.0	162.0	179.0	1	234.0	2.6	5
P6KE180(C)A	154.0	171.0	189.0	1	246.0	2.4	5
P6KE200(C)A	171.0	190.0	210.0	1	274.0	2.2	5
P6KE220(C)A	185.0	209.0	231.0	1	328.0	1.9	5
P6KE250(C)A	214.0	237.0	263.0	1	344.0	1.8	5
P6KE300(C)A	256.0	285.0	315.0	1	414.0	1.5	5
P6KE350(C)A	300.0	332.0	368.0	1	482.0	1.3	5
P6KE400(C)A	342.0	380.0	420.0	1	548.0	1.1	5
P6KE440(C)A	376.0	418.0	462.0	1	602.0	1.0	5

* For bidirectional parts with $V_{RWM} < 10\text{V}$, the I_R max limit is doubled.


P6KE6.8(C)A - P6KE440(C)A

Transient Voltage Suppressors (continued)


P6KE6.8(C)A - P6KE440(C)A

Typical Characteristics


Peak Pulse Power Rating Curve

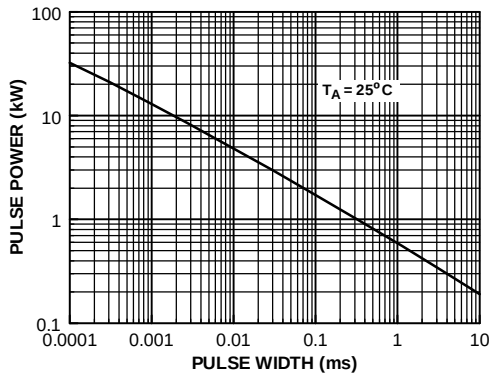


Pulse Derating Curve

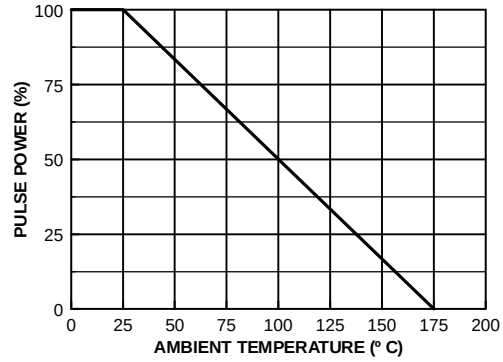


Pulse Waveform

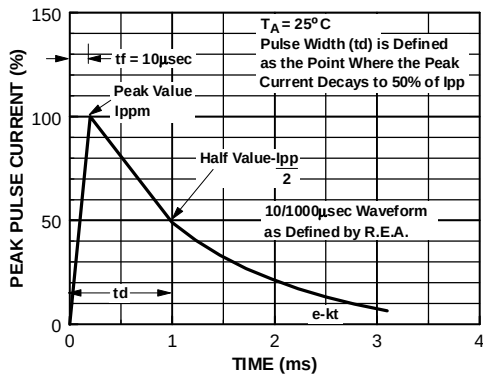

Junction Capacitance - Unidirectional

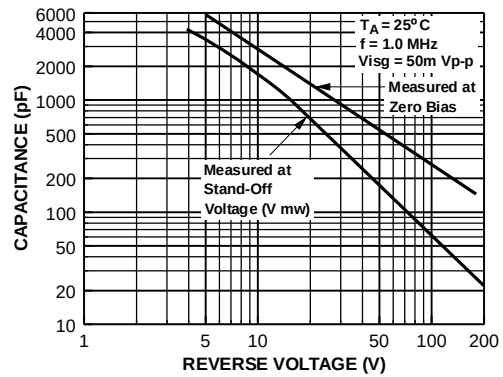

Steady State Power Derating Curve

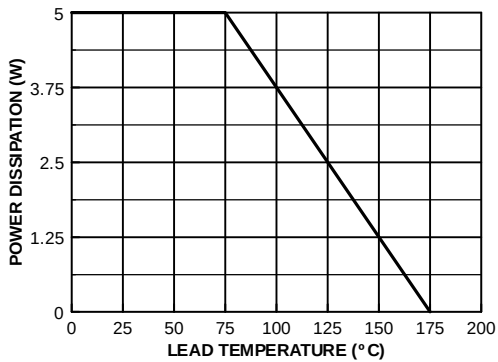

Non-Repetitive Surge Current

