

FEATURES AND SPECIFICATIONS

Features and Benefits

- Integrated magnetics, capacitors and resistors for space savings and reduced components on the motherboard
- Eases logistics
- Flexible magnetic design adapts to physical specifications from any vendor
- EMI/RFI protection includes common mode chokes
- Full magnetic performance suitable for UTP and STP applications
- Symmetrical RX/TX design can be used on PCB or hub side

Reference Information

Product Specification: PS-85533-017

Packaging: Tray

Mates with: FCC 68 Plugs

Designed in: Millimeters

Electrical

Voltage: 125V

Current: 1.5A

Contact Resistance: 20mΩ max.

Dielectric Withstanding Voltage: 1500V

Insulation Resistance: 500 MΩ min.

OCL (TX, RX): 400μH min.

Electrical (continued)

Insertion Loss (TX, RX): 0.1 to 100 MHz -1dB max.

Return Loss (TX, RX):

0.5 to 30 MHz -18 dB min.

40 MHz -15.5 dB min.

50 MHz -13.6 dB min.

60 to 80 MHz -12 dB min.

Common Mode Rejection (TX, RX):

1 to 30 MHz -50 dB min.

60 MHz -37 dB min.

100 MHz -28 dB min.

Crosstalk TX-RX (NEXT):

1 to 30 MHz -42 dB min.

60 MHz -38 dB min.

100 MHz -35 dB min.

Isolation (Hi-Pot): 1500V AC or 2250V DC

Physical

Housing: Black polyester, UL 94V-0

Contact: Phosphor Bronze

Plating: Contact Area—Post plate 1.27 to 1.52μm

(50 to 60μ") Gold

Solder Tail Area—1.90μm (75μ") min. Tin/Lead

Underplating—Nickel


Operating Temperature: -40 to +80°C




**Modular Jack
HyperJack™**

85533

**Right Angle
Shielded**



CATALOG DRAWING (FOR REFERENCE ONLY)

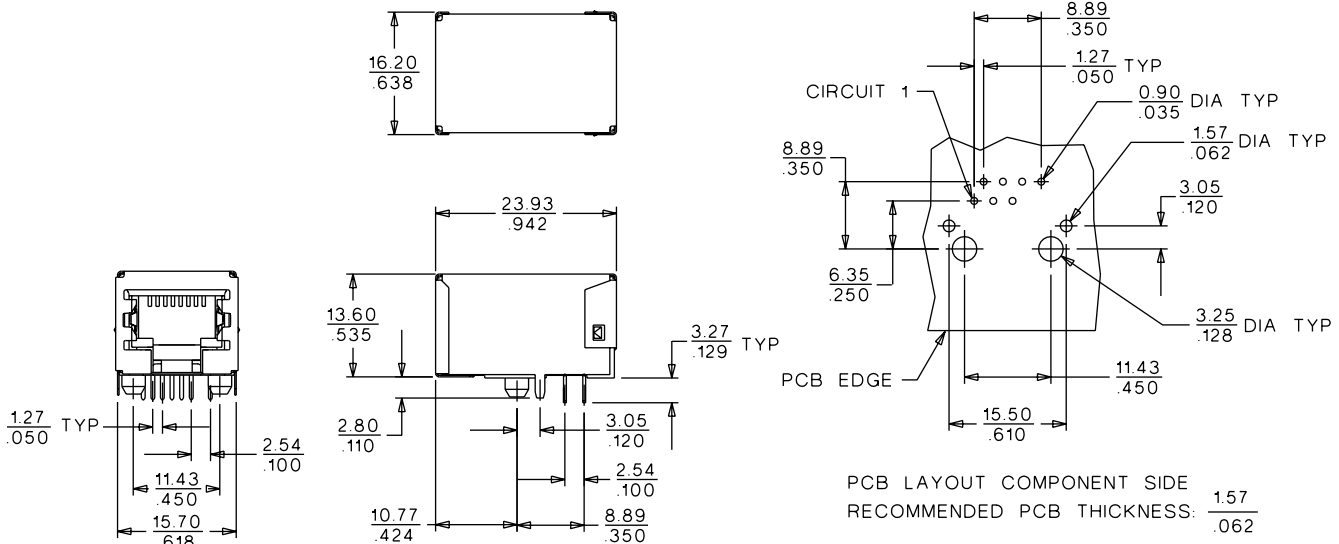

ORDERING INFORMATION AND DIMENSIONS

Circuits	Loaded Contacts	Order No.
8	8	85533-0002

Plugs and Jacks

0