

P4C1282/P4C1282L, P4C1281/P4C1281L ULTRA HIGH SPEED 64K x 4 STATIC CMOS RAMS (SCRAMS)

PRELIMINARY



FEATURES

- High Speed (Equal Access and Cycle Times)
 - 20/25/30/35 ns (Commercial)
 - 25/30/35/45/55 ns (Military)
- Low Power (Commercial/Military)
 - 690 mW Active – 20
 - 605/660 mW Active – 25/30/35/45/55
 - 135/220 mW Standby (TTL Input)
 - 55/110 mW Standby (CMOS Input) P4C1281/82
 - 9/12 mW Standby (CMOS Input) P4C1281L/82L
- 5V $\pm$ 10% Power Supply
- Data Retention with 2.0V Supply
- Separate Inputs and Outputs
 - P4C1281/L Input Data at Outputs during Write
 - P4C1282/L Outputs in High Z during Write
- Fully TTL Compatible Inputs and Outputs
- Produced with PACE II Technology™
- Standard Pinout (JEDEC Approved)
 - 28-Pin 300 mil DIP, SOJ
 - 28-Pin 350 x 550 mil LCC




DESCRIPTION

The P4C1282/L and P4C1281/L are 262,144-bit (64K x 4) ultra high speed static RAMs similar to the P4C1298, but with separate data I/O pins. The P4C1281/L feature a transparent write operation when $\overline{OE}$ is low; the outputs of the P4C1282/L are in high impedance during the write cycle. The CMOS memories require no clocks or refreshing and have equal access and cycle times. Inputs are fully TTL-compatible. The RAMs operate from a single 5V $\pm$ 10% tolerance power supply. With battery backup, data integrity is maintained for supply voltages down to 2.0V. Current drain is typically 10 μ A from 2.0V supply.


Access times as fast as 20 nanoseconds are available, permitting greatly enhanced system operating speeds.



FUNCTIONAL BLOCK DIAGRAM

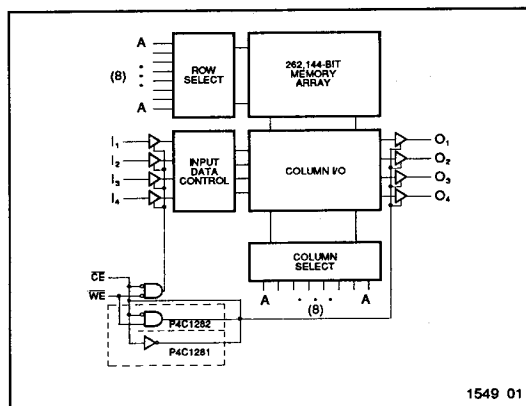

PIN CONFIGURATIONS

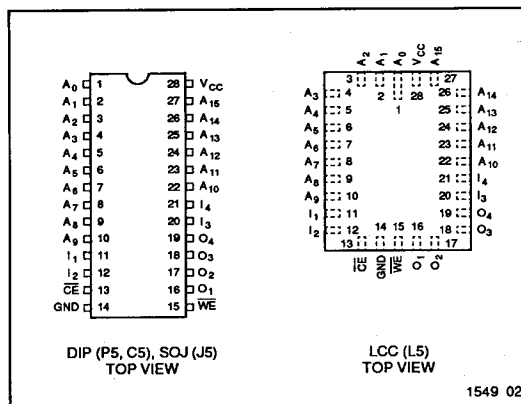



MAXIMUM RATINGS⁽¹⁾

Symbol	Parameter	Value	Unit
V_{CC}	Power Supply Pin with Respect to GND	-0.5 to +7	V
V_{TERM}	Terminal Voltage with Respect to GND (up to 7.0V)	-0.5 to $V_{CC} + 0.5$	V
T_A	Operating Temperature	-55 to +125	°C

1549 Tbl 01

Symbol	Parameter	Value	Unit
T_{BIAS}	Temperature Under Bias	-55 to +125	°C
T_{STG}	Storage Temperature	-65 to +150	°C
P_T	Power Dissipation	1.0	W
I_{OUT}	DC Output Current	50	mA

1549 Tbl 02

RECOMMENDED OPERATING TEMPERATURE AND SUPPLY VOLTAGE

Grade ⁽²⁾	Ambient Temperature	GND	V_{CC}
Military	-55 to +125°C	0V	5.0V ± 10%

1549 Tbl 03

Grade ⁽²⁾	Ambient Temperature	GND	V_{CC}
Commercial	0°C to +70°C	0V	5.0V ± 10%

1549 Tbl 04

DC ELECTRICAL CHARACTERISTICS

Over recommended operating temperature and supply voltage⁽²⁾

Over recommended operating temperatures and supply voltage.

Symbol	Parameter	Test Conditions	P4C1281 P4C1282		P4C1281L P4C1282L		Unit
			Min	Max	Min	Max	
V _{IH}	Input High Voltage		2.2	V _{CC} +0.5	2.2	V _{CC} +0.5	V
V _{IL}	Input Low Voltage		-0.5 ⁽³⁾	0.8	-0.5 ⁽³⁾	0.8	V
V _{HC}	CMOS Input High Voltage		V _{CC} -0.2	V _{CC} +0.5	V _{CC} -0.2	V _{CC} +0.5	V
V _{LC}	CMOS Input Low Voltage		-0.5 ⁽³⁾	0.2	-0.5 ⁽³⁾	0.2	V
V _{CD}	Input Clamp Diode Voltage	V _{CC} = Min., I _{IN} = -18 mA		-1.2		-1.2	V
V _{OL}	Output Low Voltage (TTL Load)	I _{OL} = +10 mA, V _{CC} = Min. I _{OL} = +8 mA, V _{CC} = Min.		0.5 0.4		0.5 0.4	V
V _{OLC}	Output Low Voltage (CMOS Load)	I _{OLC} = +100 μA, V _{CC} = Min.		0.2		0.2	V
V _{OH}	Output High Voltage (TTL Load)	I _{OH} = -4 mA, V _{CC} = Min.	2.4		2.4		V
V _{OHC}	Output High Voltage (CMOS Load)	I _{OHC} = -100 μA, V _{CC} = Min.	V _{CC} -0.2		V _{CC} -0.2		V
I _{LI}	Input Leakage Current	V _{CC} = Max. Mil. V _{IN} = GND to V _{CC} Com'l.	-10 -5	+10 +5	-5 -2	+5 +2	μA
I _{LO}	Output Leakage Current	V _{CC} = Max., $\overline{CE} = V_{IH}$, Mil. V _{OUT} = GND to V _{CC} Com'l.	-10 -5	+10 +5	-5 -2	+5 +2	μA

1549 Tbl 05

CAPACITANCES⁽⁴⁾

 $(V_{CC} = 5.0\text{V}, T_A = 25^\circ\text{C}, f = 1.0\text{MHz})$

Symbol	Parameter	Conditions	Typ.	Unit
C_{IN}	Input Capacitance	$V_{IN} = 0\text{V}$	5	pF

1549 Tbl 06

Symbol	Parameter	Conditions	Typ.	Unit
C_{OUT}	Output Capacitance	$V_{OUT} = 0\text{V}$	7	pF

1549 Tbl 07

Notes:

- Stresses greater than those listed under MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to MAXIMUM rating conditions for extended periods may affect reliability.
- Extended temperature operation guaranteed with 400 linear feet per minute of air flow.
- Transient inputs with V_{IL} and I_{IL} not more negative than -3.0V and -100mA, respectively, are permissible for pulse widths up to 20ns.
- This parameter is sampled and not 100% tested.

POWER DISSIPATION CHARACTERISTICS

Over recommended operating temperature and supply voltage⁽²⁾

Symbol	Parameter	Test Conditions	P4C1281 P4C1282		P4C1281L P4C1282L		Unit
			Min	Max	Min	Max	
I_{CC}	Dynamic Operating Current – 20	$V_{CC} = \text{Max.}, f = \text{Max.},$ Outputs Open Mil. Com'l.	—	n/a 125	—	n/a n/a	mA
I_{CC}	Dynamic Operating Current – 25, 30, 35, 45, 55	$V_{CC} = \text{Max.}, f = \text{Max.},$ Outputs Open Mil. Com'l.	—	120 110	—	120 110	mA
I_{SB}	Standby Power Supply Current (TTL Input Levels)	$\overline{CE} \geq V_{IH}$ $V_{CC} = \text{Max.},$ $f = \text{Max.},$ Outputs Open Mil. Com'l.	—	35 35	—	35 35	mA
I_{SB1}	Standby Power Supply Current (CMOS Input Levels)	$\overline{CE} \geq V_{HC}$ $V_{CC} = \text{Max.},$ $f = 0,$ Outputs Open, $V_{IN} \leq V_{LC}$ or $V_{IN} \geq V_{HC}$ Mil. Com'l.	—	35 30	—	1.0 0.2	mA

n/a = Not Applicable

1549 Tbl 08

2

DATA RETENTION CHARACTERISTICS (P4C1281L and P4C1282L Only)

Symbol	Parameter	Test Condition	Min	Typ.* $V_{CC} =$		Max $V_{CC} =$		Unit
				2.0V	3.0V	2.0V	3.0V	
V_{DR}	V_{CC} for Data Retention		2.0					V
I_{CCDR}	Data Retention Current	Mil. Com'l.		50 50	75 75	600 500	900 750	μA μA
t_{CDR}	Chip Deselect to Data Retention Time	$\overline{CE} \geq V_{CC} - 0.2V,$ $V_{IN} \geq V_{CC} - 0.2V$ or $V_{IN} \leq 0.2V$	0					ns
$t_R^\dagger$	Operation Recovery Time		$t_{RC}^\S$					ns


* $T_A = +25^\circ\text{C}$

$^\S t_{RC}$ = Read Cycle Time

† This parameter is guaranteed but not tested.

1549 Tbl 09

DATA RETENTION WAVEFORM

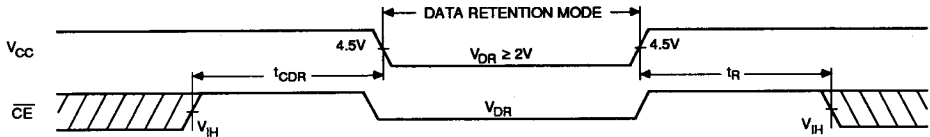

1549 03



AC CHARACTERISTICS—READ CYCLE


($V_{CC} = 5V \pm 10\%$, All Temperature Ranges)⁽²⁾

Symbol	Parameter	-20*		-25		-30		-35		-45		-55		Unit
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	
t_{RC}	Read Cycle Time	20		25		30		35		45		55		ns
t_{AA}	Address Access Time		20		25		30		35		45		55	ns
t_{AC}	Chip Enable Access Time		20		25		30		35		45		55	ns
t_{OH}	Output Hold from Address Change	2		3		3		3		3		3		ns
t_{LZ}	Chip Enable to Output in Low Z	2		3		3		3		3		3		ns
t_{HZ}	Chip Disable to Output in High Z		10		10		13		15		15		20	ns
t_{PU}	Chip Enable to Power Up Time	0		0		0		0		0		0		ns
t_{PD}	Chip Disable to Power Down Time		20		25		30		35		45		55	ns

* $V_{CC} = 5V \pm 5\%$ for -20


1549 Tbl 10

TIMING WAVEFORM OF READ CYCLE NO. 1 ⁽⁵⁾

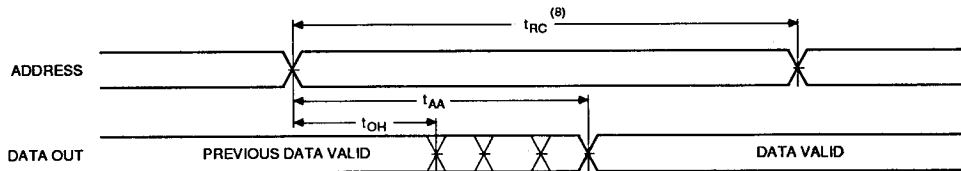

1549 04

TIMING WAVEFORM OF READ CYCLE NO. 2 ⁽⁶⁾

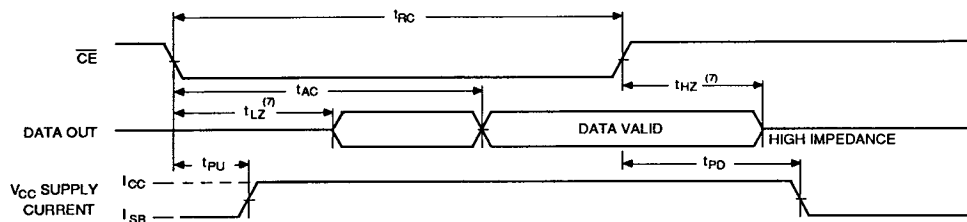

1549 05

Notes:

5. $\overline{CE}$ is low and $\overline{WE}$ is high for READ cycle.
6. $\overline{WE}$ is high, and address must be valid prior to or coincident with $\overline{CE}$ transition low.
7. Transition is measured $\pm 200mV$ from steady state voltage prior to

change with specified loading in Figure 1. This parameter is sampled and not 100% tested.


8. Read Cycle Time is measured from the last valid address to the first transitioning address.

AC CHARACTERISTICS—WRITE CYCLE(V_{CC} = 5V ± 10%, All Temperature Ranges)⁽²⁾

Sym.	Parameter	-20*		-25		-30		-35		-45		-55		Unit
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	
t _{WC}	Write Cycle Time	16		20		25		30		40		50		ns
t _{CW}	Chip Enable Time to End of Write	15		20		25		30		35		40		ns
t _{AW}	Address Valid to End of Write	15		20		25		25		35		40		ns
t _{AS}	Address Set-up Time	0		0		0		0		0		0		ns
t _{WP}	Write Pulse Width	15		20		25		25		35		40		ns
t _{AH}	Address Hold Time from End of Write	0		0		0		0		0		0		ns
t _{WR}	Write Recovery Time	0		0		0		0		0		0		ns
t _{DW}	Data Valid to End of Write	12		13		15		15		20		25		ns
t _{DH}	Data Hold Time	0		0		0		0		0		0		ns
t _{WZ}	Write Enable to Output in High Z (P4C1282)		8		10		10		10		15		20	ns
t _{OW}	Output Active from End of Write (P4C1282)	2		2		3		3		3		3		ns
t _{AWE}	Write Enable to Data-out Valid (P4C1281)		18		20		25		30		35		40	ns
t _{ADV}	Data-in Valid to Data-out Valid (P4C1281)		18		20		25		30		35		40	ns

*V_{CC} = 5V ± 5% for -20

1549 Tbl 11

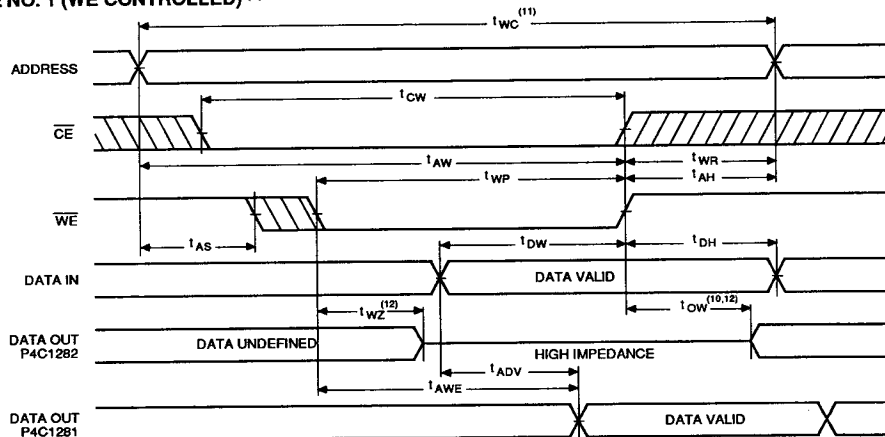WRITE CYCLE NO. 1 (WE CONTROLLED)⁽⁹⁾

1549 06


Notes:

9. $\overline{CE}$ and $\overline{WE}$ must be low for WRITE cycle.
10. If $\overline{CE}$ goes high simultaneously with $\overline{WE}$ high, the output remains in a high impedance state.
11. Write Cycle Time is measured from the last valid address to the first transition address.

12. Transition is measured $\pm 200\text{mV}$ from steady state voltage prior to change with specified loading in Figure 1. This parameter is sampled and not 100% tested.



WRITE CYCLE NO. 2 (CE CONTROLLED) ⁽⁹⁾

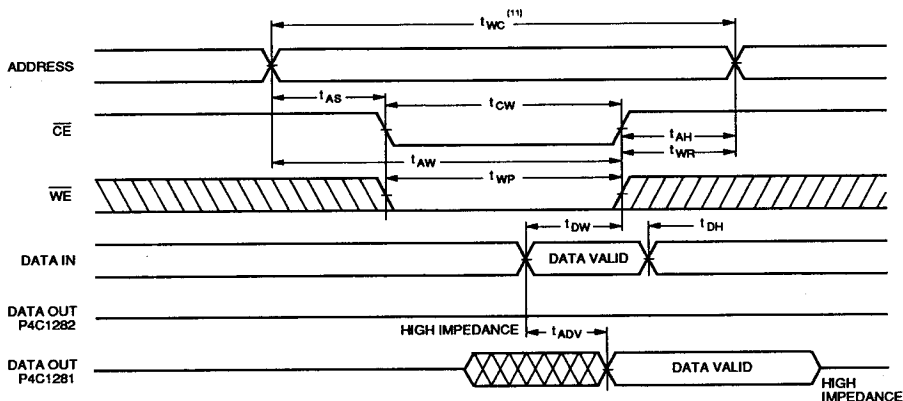

1549 07

AC TEST CONDITIONS


Input Pulse Levels	GND to 3.0V
Input Rise and Fall Times	3ns
Input Timing Reference Level	1.5V
Output Timing Reference Level	1.5V
Output Load	See Figures 1 and 2

1549 Tbl 12

TRUTH TABLE P4C1281/L (P4C1282/L)

Mode	CE	WE	Output	Power
Standby	H	X	High Z	Standby
Read	L	H	D _{OUT}	Active
Write	L	L	D _{IN} (High Z)	Active

1549 Tbl 13

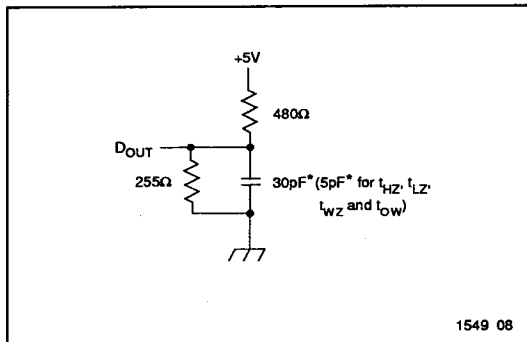


1549 08

Figure 1. Output Load

* including scope and test fixture.

Note:

Due to the ultra-high speed of the P4C1281/L and P4C1282/L, care must be taken when testing this device; an inadequate setup can cause a normal functioning part to be rejected as faulty. Long high-inductance leads that cause supply bounce must be avoided by bringing the V_{CC} and ground planes directly up to the contactor fingers. A 0.01 μF high frequency capacitor is also required between

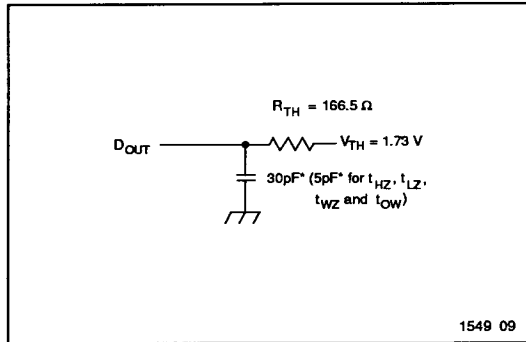


1549 09

Figure 2. Thevenin Equivalent

V_{CC} and ground. To avoid signal reflections, proper termination must be used; for example, a 50Ω test environment should be terminated into a 50Ω load with 1.73V (Thevenin Voltage) at the comparator input, and a 116Ω resistor must be used in series with D_{OUT} to match 166Ω (Thevenin Resistance).

ORDERING INFORMATION

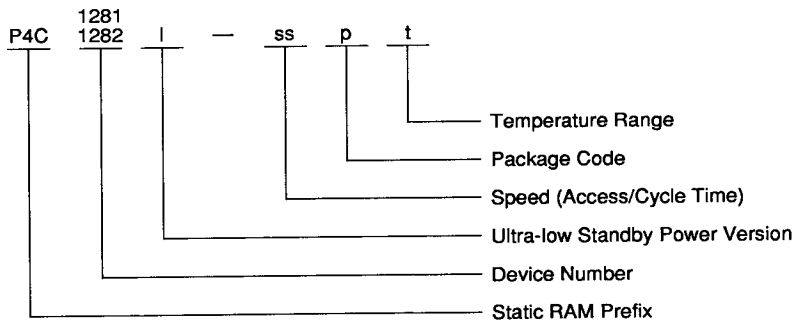

L = Ultra-low standby power designator L, if needed.
ss = Speed (access/cycle time in ns), e.g., 25, 35
p = Package code, i.e., P, J, C, L.
t = Temperature range, i.e., C, M, MB.

1549 10

2

PACKAGE SUFFIX

Package Suffix	Description
P	Plastic DIP, 300 mil wide standard
J	Plastic SOJ, 300 mil wide standard
C	Sidebrazed DIP, 300 mil wide standard
L	Leadless Chip Carrier (ceramic)

1549 Tbl 14

TEMPERATURE RANGE SUFFIX

Temperature Range Suffix	Description
C	Commercial Temperature Range, 0°C – +70°C.
M	Military Temperature Range, –55°C – +125°C.
MB	Mil. Temp. with MIL-STD-883C Class B compliance

1549 Tbl 15

SELECTION GUIDE

The P4C1281/L and P4C1282/L are available in the following temperature, speed and package options.

Temperature Range	Speed		20	25	30	35	45	55
	Package							
Commercial	Plastic DIP		-20PC	-25PC	-30PC	-35PC	N/A	N/A
	Plastic SOJ		-20JC	-25JC	-30JC	-35JC	N/A	N/A
	Sidebrazed DIP		-20CC	-25CC	-30CC	-35CC	N/A	N/A
	LCC		-20LC	-25LC	-30LC	-35LC	N/A	N/A
Military Temp.	Sidebrazed DIP		N/A	-25CM	-30CM	-35CM	-45CM	-55CM
	LCC		N/A	-25LM	-30LM	-35LM	-45LM	-55LM
Military Processed*	Sidebrazed DIP		N/A	-25CMB	-30CMB	-35CMB	-45CMB	-55CMB
	LCC		N/A	-25LMB	-30LMB	-35LMB	-45LMB	-55LMB

* Military temperature range with MIL-STD-883 Revision C, Class B processing.

N/A = Not available

Advance Information

1549 Tbl 16

TECHDOC 1549