

Octal transceiver with dual enable with 5-volt tolerant inputs/outputs; damping resistor; 3-state

74LVC2623A
74LVCH2623A

FEATURES

- 5-volt tolerant inputs/outputs, for interfacing with 5-volt logic.
- Wide supply voltage range of 1.2 V to 3.6 V
- In accordance with the JEDEC standard no. 8-1A
- Flow-through pin-out architecture
- CMOS low power consumption
- Inputs accept voltages upto 5.5 V
- Direct interface with TTL levels
- Bushold on all data inputs (LVCH2623A only).
- Integrated 30Ω damping resistor.

DESCRIPTION

The 74LVC(H)2623A is a high-performance, low-power, low-voltage, Si-gate CMOS device and superior to most advanced CMOS compatible TTL families. The 74LVC(H)2623A is an octal transceiver featuring non-inverting 3-state bus compatible outputs in both send and receive directions. This octal bus transceiver is designed for asynchronous two-way communication between data buses. The control function implementation allows maximum flexibility in timing. This device allows data transmission from the A bus to the B bus or from the B bus to the A bus, depending upon the logic levels at the enable inputs ($\overline{OE}_{AB}$, $\overline{OE}_{BA}$). The enable inputs can be used to disable the device so that the buses are effectively isolated. The dual enable function configuration gives this transceiver the capability to store data by simultaneous enabling of $\overline{OE}_{AB}$ and $\overline{OE}_{BA}$. Each output reinforces its input in this transceiver configuration. Thus, when both control inputs are enabled and all other data sources to the two sets of the bus lines are at high impedance OFF-state, both sets of bus lines will remain at their last states.

QUICK REFERENCE DATA

GND = 0 V; $T_{amb} = 25^\circ\text{C}$; $t_r = t_f \leq 2.5\text{ ns}$

SYMBOL	PARAMETER	CONDITIONS	TYPICAL	UNIT
t_{PHL}/t_{PLH}	propagation delay A_n to B_n ; B_n to A_n	$C_L = 50\text{ pF}$ $V_{CC} = 3.3\text{ V}$	4.1	ns
C_i	input capacitance		5.0	pF
C_{IO}	input/output capacitance		10	pF
C_{PD}	power dissipation capacitance per buffer	notes 1 and 2	40	pF

Notes to the quick reference data

1. C_{PD} is used to determine the dynamic power dissipation (P_D in μW):
 $P_D = C_{PD} \times V_{CC}^2 \times f_i + \Sigma (C_L \times V_{CC}^2 \times f_o)$ where:
 f_i = input frequency in MHz; C_L = output load capacity in pF;
 f_o = output frequency in MHz; V_{CC} = supply voltage in V;
 $\Sigma (C_L \times V_{CC}^2 \times f_o)$ = sum of outputs.
2. The condition is $V_i = \text{GND to } V_{CC}$.

ORDERING INFORMATION

TYPE NUMBER	PACKAGES			
	PINS	PACKAGE	MATERIAL	CODE
74LVC(H)2623AD	20	SO	plastic	SOT163-1
74LVC(H)2623ADB	20	SSOP	plastic	SOT339-1
74LVC(H)2623APW	20	TSSOP	plastic	SOT360-1

PINNING

PIN	SYMBOL	NAME AND FUNCTION
1	$\overline{OE}_{AB}$	output enable input (active HIGH)
2, 3, 4, 5, 6, 7, 8, 9	A_0 to A_7	data inputs/outputs
10	GND	ground (0 V)
18, 17, 16, 15, 14, 13, 12, 11	B_0 to B_7	data inputs/outputs
19	$\overline{OE}_{BA}$	output enable input (active LOW)
20	V_{CC}	positive supply voltage

DESCRIPTION (Continued)

The 8-bit codes appearing on the two sets of buses will be identical. The '2623' is identical to the '2620' but has true (non-inverting) outputs.

Octal transceiver with dual enable with 5-volt tolerant inputs/outputs; damping resistor; 3-state

74LVC2623A 74LVCH2623A

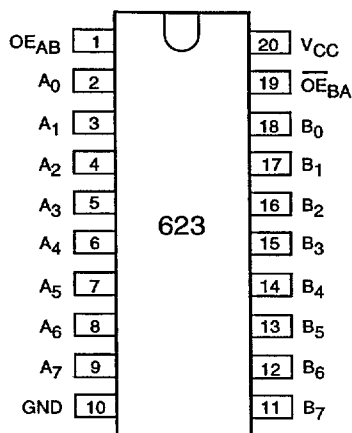


Fig.1 Pin configuration.

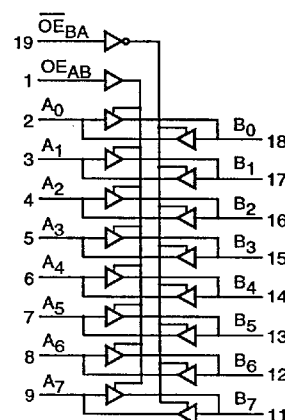


Fig.2 Logic symbol.

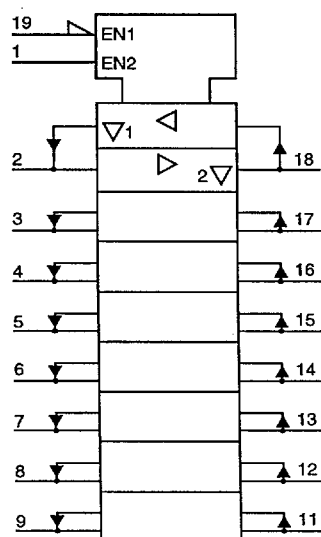


Fig.3 IEC logic symbol.

FUNCTION TABLE

INPUTS		INPUTS/OUTPUTS	
OE_{AB}	$\overline{OE}_{BA}$	A_n	B_n
L	L	$A = B$	inputs
H	H	inputs	$B = A$
L	H	Z	Z
H	L	$A = B$ inputs	inputs $B = A$

H = HIGH voltage level

L = LOW voltage level

Z = high impedance OFF-state

Octal transceiver with dual enable with 5-volt
tolerant inputs/outputs; damping resistor; 3-state

74LVC2623A
74LVCH2623A

DC CHARACTERISTICS FOR 74LVC(H)2623A

For the DC characteristics see chapter "LVC(H)-A family characteristics", section "Family specifications".

I_{CC} category: MSI

AC CHARACTERISTICS FOR 74LVC(H)2623A

GND = 0 V; $t_r = t_f \leq 2.5$ ns; $C_L = 50$ pF

SYMBOL	PARAMETER	T _{amb} (°C)			UNIT	TEST CONDITIONS	
		-40 to +85				V _{CC} (V)	WAVEFORMS
		MIN.	TYP.	MAX.			
t _{PHL} /t _{PLH}	propagation delay A _n to B _n ; B _n to A _n	— 1.5 1.5	21 4.6 4.1*	— 9.5 8.0	ns	1.2 2.7 3.0 to 3.6	Figs 4, 7
t _{PZH} /t _{PZL}	3-state output enable time OE _{AB} to B _n	— 1.5 1.5	25 5.0 4.5*	— 10.5 9.5	ns	1.2 2.7 3.0 to 3.6	Figs 6, 7
t _{PHZ} /t _{PLZ}	3-state output disable time OE _{AB} to B _n	— 1.5 1.5	8 4.5 4.0*	— 8.0 7.0	ns	1.2 2.7 3.0 to 3.6	Figs 6, 7
t _{PZH} /t _{PZL}	3-state output enable time OE _{BA} to A _n	— 1.5 1.5	25 5.0 4.5*	— 10.5 9.5	ns	1.2 2.7 3.0 to 3.6	Figs 5, 7
t _{PHZ} /t _{PLZ}	3-state output disable time OE _{BA} to A _n	— 1.5 1.5	8 4.5 4.0*	— 8.0 7.0	ns	1.2 2.7 3.0 to 3.6	Figs 5, 7

Notes: All typical values are measured at $T_{amb} = 25$ °C.

* Typical values are measured at $V_{CC} = 3.3$ V.

Octal transceiver with dual enable with 5-volt tolerant inputs/outputs; damping resistor; 3-state

74LVC2623A 74LVCH2623A

AC WAVEFORMS

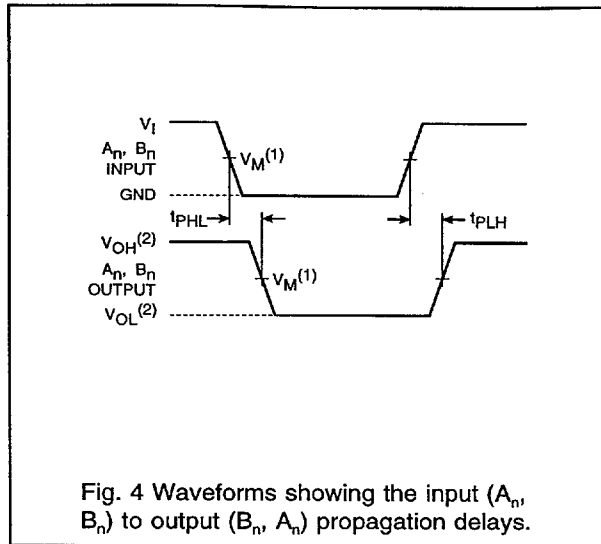


Fig. 4 Waveforms showing the input (A_n , B_n) to output (B_n , A_n) propagation delays.

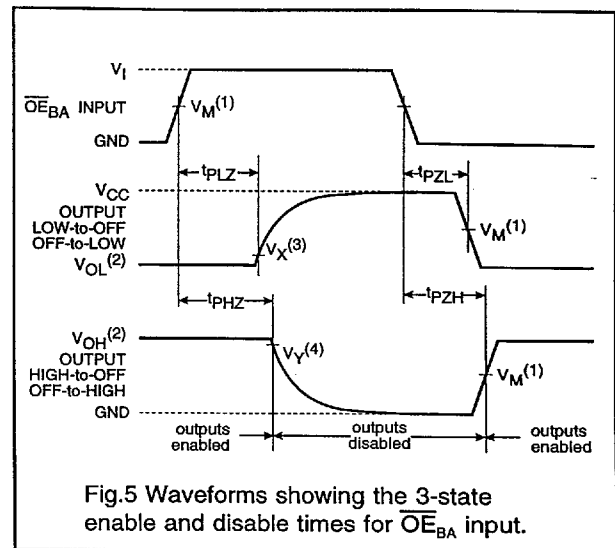


Fig. 5 Waveforms showing the 3-state enable and disable times for $\overline{OE}_{BA}$ input.

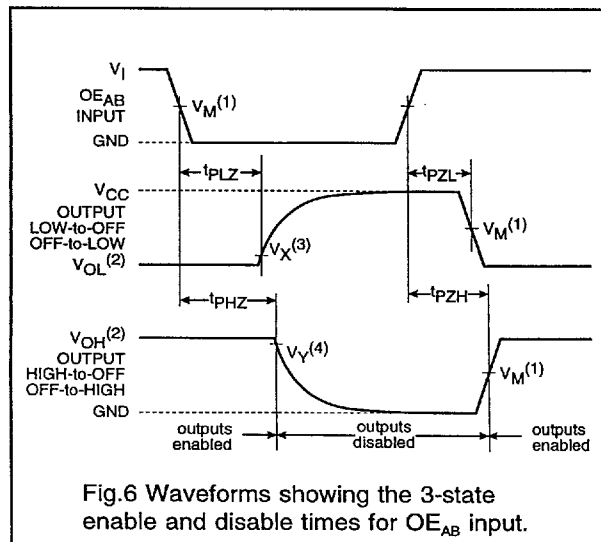


Fig. 6 Waveforms showing the 3-state enable and disable times for $\overline{OE}_{AB}$ input.

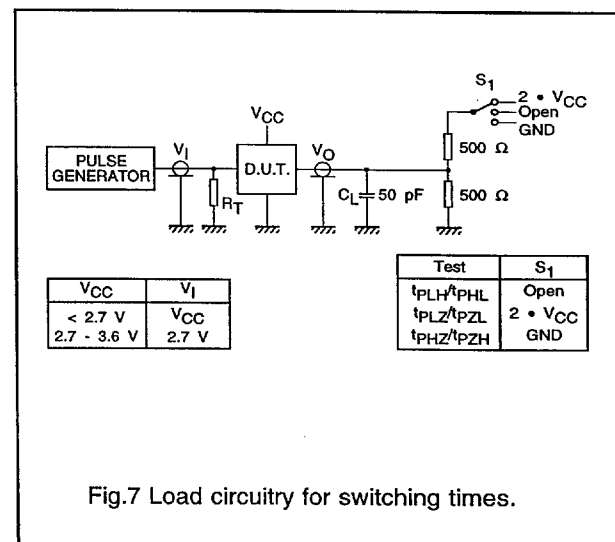


Fig. 7 Load circuitry for switching times.

- Notes:**
- (1) $V_M = 1.5$ V at $V_{CC} \geq 2.7$ V
 $V_M = 0.5 \cdot V_{CC}$ at $V_{CC} < 2.7$ V
 - (2) V_{OL} and V_{OH} are the typical output voltage drop that occur with the output load
 - (3) $V_X = V_{OL} + 0.3$ V at $V_{CC} \geq 2.7$ V
 $V_X = V_{OL} + 0.1 \cdot V_{CC}$ at $V_{CC} < 2.7$ V
 - (4) $V_Y = V_{OH} - 0.3$ V at $V_{CC} \geq 2.7$ V
 $V_Y = V_{OH} - 0.1 \cdot V_{CC}$ at $V_{CC} < 2.7$ V