


DUAL HIGH POWER OPERATIONAL AMPLIFIER APPROVED TO DESC DRAWING 5962-90838



8-Pin TO-3 And 12-Pin DIP, Dual 5 Amp Operational Amplifier

FEATURES

- Approved to DESC Drawing 5962-90838.
- Available In Isolated Standard TO-3, "Copper Slug" TO-3 And Power DIP Packages
- 5 Amp Peak Output Current
- Power Supplies to $\pm 40V$
- FET Input
- Dual Configuration


DESCRIPTION

The OMA2541 is a high performance dual power operational amplifier capable of operation from power supplies up to $\pm 40V$ and continuous output current up to 5A. This device is ideally suited for Military motor driver, servo amplifiers, bridge amplifier, synchro/resolver exertation as well as other power management driver applications. Internal circuitry limits output current to approximately 6 Amps. All products are available with Hi-Rel screening and approved to DESC drawing 5962-90838.


ABSOLUTE MAXIMUM RATINGS @ 25°C

Supply Voltage, $+V_S$ to $-V_S$	80V
Output Current, Continuous	5A
Power Dissipation, Internal	125W
Operating Temperature Range	-55°C to 125°C
Storage Temperature Range	-55°C to 150°C
Maximum Junction Temperature	175°C
Lead Temperature (10 Sec. Soldering)	300°C


SCHEMATIC

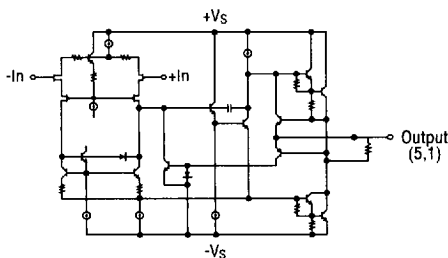

PIN CONNECTION



TOP VIEW D-12



TOP VIEW TO-3

3.4

ELECTRICAL CHARACTERISTICS (-55°C ≤ T_A ≤ +125°C; V_{CC} = ±37V_{DC} ⁽¹⁾)

Parameter	Symbol	Conditions	Min.	Max.	Units
Input Offset Voltage	V _{IO}	T _A = +25°C	-1	+1	mV
Input Offset Voltage Drift	$\frac{\Delta V_{IO}}{\Delta T}$	T _A = -55°C and +125°C	•	-30 +30	µV/°C
Input Bias Current	±I _B		•	-50 +50	pA nA
Input Offset Current	I _{OS}		•	-30 +30 -20 +20	pA nA
Power Supply Rejection Ratio	+PSRR -PSRR	-V _{CC} = -34V _{DC} , +V _{CC} = +10 to +40V _{DC} +V _{CC} = +34V _{DC} , -V _{CC} = -10 to -40V _{DC}	• • •	-10 +10 -20 +20 -10 +10 -20 +20	µV/V µV/V
Common Mode Rejection Ratio	CMRR	V _{CM} = +22V _{DC} , f = DC	•	95 90	dB
Supply Currents	±I _{CC}	V _{CM} = 0V, no load condition, total supply current	•	-60 +60	mA
Output Voltage Peak	V _{OP}	I _O = 5A peak, R _L = 5.6Ω, 10 kHz sine wave, T _A = 25°C R _L = 10Ω, 10 kHz sine wave T _A = -55°C and +125°C	•	±28.6 ±30	V V
Output Current Peak	I _{OP}	R _L = 5.6Ω, V _{OUT} = ±30V _{DC} , T _A = 25°C (2) R _L = 10kΩ, V _{OUT} = ±30V _{DC} , T _A = -55°C and +125°C (2)	•	 ±5 ±3	A A
Voltage Gain	A _{VS}	R _L = 10kΩ T _A = 25°C T _A = 125°C T _A = -55°C		95 90 85	dB
Slew Rate	±SR	R _L = 6.5Ω, T _A = +25°C		±6	V/µs

Thermal Resistance Maximum		Conditions	Standard TO-3	Copper Slug TO-3	Power DIP	Units
Junction-to-Case	θ _{JC}	Both Amplifiers ⁽³⁾ , AC Output f > 60Hz	1.0	.8	.65	°C/W
		Both Amplifiers ⁽³⁾ , DC Output	1.2	1.0	.8	°C/W
		One Amplifier, AC Output f > 60Hz	1.5	1.2	1.0	°C/W
		One Amplifier, DC Output	1.9	1.5	1.15	°C/W
Junction-to-Ambient	θ _{JA}	No Heat Sink	30	30	30	°C/W

- NOTES:** (1) Unless otherwise specified, these tests are for each amplifier.
(2) Internal current limit circuitry is controlled by a single external resistor, R_{CL}. To calculate the value of the current limit resistor, use R_{CL} = (0.809/I_{LM}) - 0.057, where I_{LM} is equal to the desired output current (I_{OP}).
(3) Assumes equal dissipation in both amplifiers.
- Denotes over specified temperature range.


Part Number Designator		
Standard Military Drawing Number	Omnirel Part Number	Package
5962-9083801HXX	OMA2541SKB	TO-3
5962-9083802HXX	OMA2541SKCB	TO-3 Copper Slug
5962-9083801HYX	OMA2541SDB	12 Pin DIP




TYPICAL PERFORMANCE CURVES

$T_A = +25^\circ\text{C}$, $V_S = \pm V_{DC}$ unless otherwise noted


**Input Bias Current
VS Temperature**

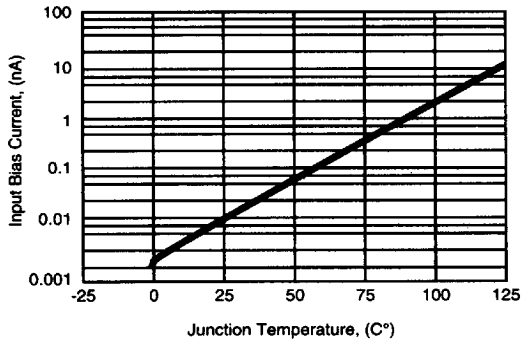


**Open-Loop Gain and
Phase VS Frequency**

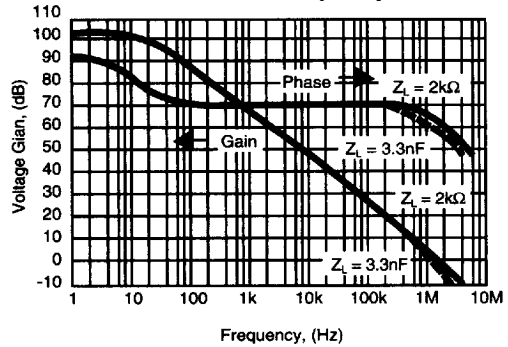


**Normalized Quiescent Current VS
Total Power Supply Voltage**

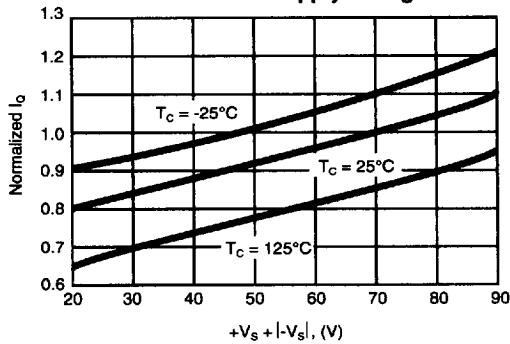


**Output Voltage Swing
VS Output Current**

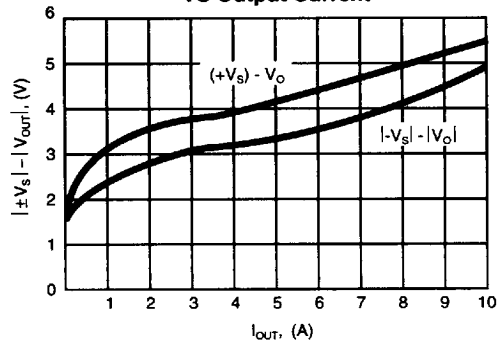


**Voltage Noise Density
VS Frequency**

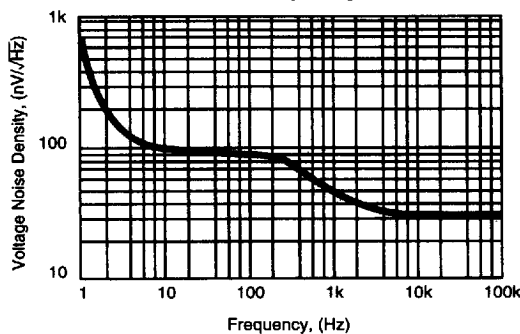


**Total Harmonic Distortion
VS Frequency**

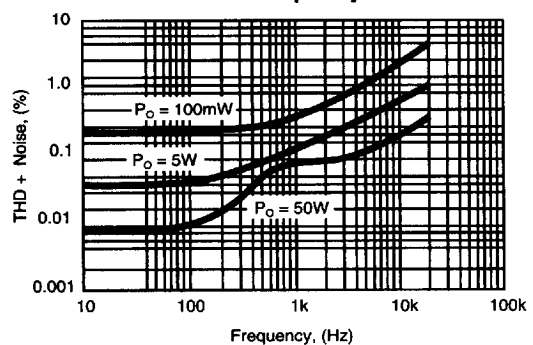


Typical Common-Mode Rejection
VS Frequency (Case Dependent)




Typical Output Current
VS Temperature (Case Dependent)




Copper Slug TO-3
Safe Operating Area
OMA2541SKC



Standard TO-3
Safe Operating Area
OMA2541SK




Power DIP
Safe Operating Area
OMA2541SD/SDZ




MECHANICAL OUTLINE

D-12

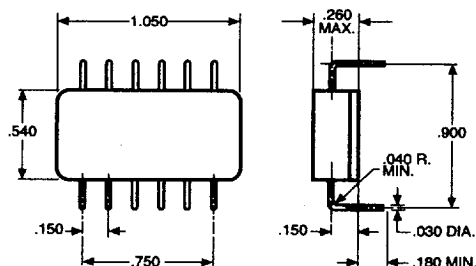

TO-3-8

STANDARD AND COPPER SLUG



DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	1.510	1.550	38.35	39.37
B	.745	.770	18.92	19.56
C	.260	.300	6.60	7.62
D	.038	.042	0.97	1.07
E	.080	.105	2.03	2.67
F	40° BASIC		40° BASIC	
G	.500 BASIC		12.7 BASIC	
H	1.186 BASIC		30.12 BASIC	
J	.593 BASIC		15.06 BASIC	
K	.400	.500	10.16	12.70
Q	.151	.161	3.84	4.09
R	.980	1.020	24.89	25.91

Note: Leads in true position within 0.010" (0.25mm) R at MMC at seating plane.
Pin numbers shown for reference only. Numbers may not be marked on package.



205 Crawford Street, Leominster, MA 01453 USA (508) 534-5776 FAX (508) 537-4246

6789073 0001750 286

3.4-8