


FOUR UNCOMMITTED POWER MOSFETS IN ISOLATED LOW PROFILE PLASTIC PACKAGE



Four Uncommitted 100V To 1000V, Up To 30A
N-Channel Power MOSFETs In One Package

FEATURES

- Isolated High Density Package
- High Current
- Fast Switching, Low Drive Current
- Ease of Paralleling For Added Power
- Low $R_{DS(on)}$
- P-Channel Also Available (up to 200V)

DESCRIPTION


This series of Industrial products feature the latest advanced MOSFET and packaging technology. They are ideally suited where small size, high performance and high reliability are required, in applications such as switching power supplies, motor controls, inverters, choppers, audio amplifiers and high energy pulse circuits.

MAXIMUM RATINGS (Per MOSFET)


PART NUMBER	V_{DS}	$R_{DS(on)}$	I_D
OM6223SP2	100V	.065 Ω	30A
OM6224SP2	200V	0.1 Ω	25A
OM6225SP2	500V	0.4 Ω	12A
OM6226SP2	1000V	3 Ω	4A

2.1

SCHEMATIC

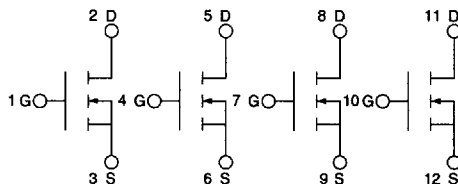

PIN CONNECTION

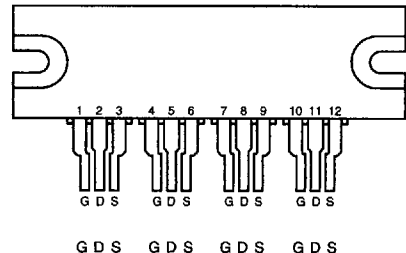

ELECTRICAL CHARACTERISTICS: Per MOSFET
OM6223SP2 (100V) ($T_C = 25^\circ$ unless otherwise noted)

Characteristic	Symbol	Min.	Max.	Units
OFF CHARACTERISTICS				
Drain-Source Breakdown Voltage ($V_{GS} = 0, I_D = 0.25\text{mA}$)	$V_{DS(BSS)}$	100	-	Vdc
Zero Gate Voltage Drain Current ($V_{DS} = \text{Rated } V_{DS}, V_{GS} = 0$)	I_{DSS}	-	0.2	mAdc
($V_{DS} = \text{Rated } V_{DS}, V_{GS} = 0, T_J = 125^\circ\text{C}$)		-	1	
Gate-Body Leakage Current, Forward ($V_{GSF} = 20\text{ Vdc}, V_{DS} = 0$)	I_{GSSF}	-	100	nAdc
Gate-Body Leakage Current, Reverse ($V_{GSF} = 20\text{ Vdc}, V_{DS} = 0$)	I_{GSSR}	-	100	nAdc

ON CHARACTERISTICS*

Gate Threshold Voltage ($V_{DS} = V_{GS}, I_D = 1\text{mA}$) ($T_J = 100^\circ\text{C}$)	$V_{GS(th)}$	2 1.5	4 3.5	Vdc
Static Drain-Source On-Resistance ($V_{GS} = 10\text{ Vdc}, I_D = 20\text{ Adc}$)	$r_{DS(on)}$	-	0.065	Ohm
Drain-Source-On-Voltage ($V_{GS} = 10\text{ V}$) ($I_D = 30\text{ Adc}$)	$V_{DS(on)}$	-	2.3	Vdc
($I_D = 20\text{ Adc}, T_J = 100^\circ\text{C}$)		-	2.6	
Forward Transconductance ($V_{DS} = 15\text{ V}, I_D = 20\text{A}$)	g_{fs}	10	-	mhos

DYNAMIC CHARACTERISTICS

Input Capacitance ($V_{DS} = 25\text{V}, V_{GS} = 0, f = 1\text{MHz}$)	C_{iss}	2800 (Typ)	-	pF
Output Capacitance	C_{oss}	1200 (Typ)	-	
Reverse Transfer Capacitance	C_{res}	400 (Typ)	-	

SWITCHING CHARACTERISTICS* ($T_J = 100^\circ\text{C}$)

Turn-On Delay Time ($V_{DS} = 50\text{V}, I_D = 20\text{A}, R_{\theta JA} = 4.7\text{ Ohms}$)	$t_{d(on)}$	-	40	ns
Rise Time	t_r	-	120	
Turn-Off Delay Time	$t_{d(off)}$	-	150	
Fall Time	t_f	-	100	
Total Gate Charge ($V_{DS} = 80\text{V}, I_D = 30\text{A}, V_{GS} = 10\text{V}$)	Q_g	105 (Typ)	130	nC
Gate-Source Charge	Q_{gs}	15 (Typ)	28	
Gate-Drain Charge	Q_{gd}	45 (Typ)	70	

SOURCE-DRAIN DIODE CHARACTERISTICS*

Forward On-Voltage ($I_D = 30\text{A}, V_{GS} = 0$)	V_{SD}	-	2.2	Vdc
Forward Turn-On Time	t_{on}	Limited By Stray Inductance	-	
Reverse Recovery Time	t_r	200 (Typ)	-	ns

*Pulse Test: Pulse Width = 300 μ s, Duty Cycle $\leq$ 2%.ELECTRICAL CHARACTERISTICS: Per MOSFET
OM6224SP2 (200V) ($T_C = 25^\circ$ unless otherwise noted)

Characteristic	Symbol	Min.	Max.	Units
OFF CHARACTERISTICS				
Drain-Source Breakdown Voltage ($V_{GS} = 0, I_D = 0.25\text{mA}$)	$V_{DS(BSS)}$	200	-	Vdc
Zero Gate Voltage Drain Current ($V_{DS} = \text{Rated } V_{DS}, V_{GS} = 0$)	I_{DSS}	-	0.2	mAdc
($V_{DS} = \text{Rated } V_{DS}, V_{GS} = 0, T_J = 125^\circ\text{C}$)		-	1	
Gate-Body Leakage Current, Forward ($V_{GSF} = 20\text{ Vdc}, V_{DS} = 0$)	I_{GSSF}	-	100	nAdc
Gate-Body Leakage Current, Reverse ($V_{GSF} = 20\text{ Vdc}, V_{DS} = 0$)	I_{GSSR}	-	100	nAdc

ON CHARACTERISTICS*

Gate Threshold Voltage ($V_{DS} = V_{GS}, I_D = 1\text{mA}$) ($T_J = 100^\circ\text{C}$)	$V_{GS(th)}$	2 1.5	4 3.5	Vdc
Static Drain-Source On-Resistance ($V_{GS} = 10\text{ Vdc}, I_D = 16\text{ Adc}$)	$r_{DS(on)}$	-	0.1	Ohm
Drain-Source-On-Voltage ($V_{GS} = 10\text{ V}$) ($I_D = 25\text{ Adc}$)	$V_{DS(on)}$	-	3.5	Vdc
($I_D = 16\text{ Adc}, T_J = 100^\circ\text{C}$)		-	3.2	
Forward Transconductance ($V_{DS} = 15\text{ V}, I_D = 16\text{A}$)	g_{fs}	10	-	mhos

DYNAMIC CHARACTERISTICS

Input Capacitance ($V_{DS} = 25\text{V}, V_{GS} = 0, f = 1\text{MHz}$)	C_{iss}	2850 (Typ)	-	pF
Output Capacitance	C_{oss}	700 (Typ)	-	
Reverse Transfer Capacitance	C_{res}	170 (Typ)	-	

SWITCHING CHARACTERISTICS* ($T_J = 100^\circ\text{C}$)

Turn-On Delay Time ($V_{DS} = 100\text{V}, I_D = 16\text{A}, R_{\theta JA} = 4.7\text{ Ohms}$)	$t_{d(on)}$	-	40	ns
Rise Time	t_r	-	90	
Turn-Off Delay Time	$t_{d(off)}$	-	150	
Fall Time	t_f	-	100	
Total Gate Charge ($V_{DS} = 100\text{V}, I_D = 25\text{A}, V_{GS} = 10\text{V}$)	Q_g	85 (Typ)	130	nC
Gate-Source Charge	Q_{gs}	15 (Typ)	28	
Gate-Drain Charge	Q_{gd}	40 (Typ)	65	

SOURCE-DRAIN DIODE CHARACTERISTICS*

Forward On-Voltage ($I_D = 25\text{A}, V_{GS} = 0$)	V_{SD}	-	2	Vdc
Forward Turn-On Time	t_{on}	Limited By Stray Inductance	-	
Reverse Recovery Time	t_r	200 (Typ)	-	ns

*Pulse Test: Pulse Width = 300 μ s, Duty Cycle $\leq$ 2%.

ELECTRICAL CHARACTERISTICS: Per MOSFET **OM6225SP2 (500V)** ($T_C = 25^\circ$ unless otherwise noted)

Characteristic	Symbol	Min.	Max.	Units
OFF CHARACTERISTICS				
Drain-Source Breakdown Voltage ($V_{GS} = 0, I_D = 0.25\text{mA}$)	$V_{DS(BR)}$	500	-	Vdc
Zero Gate Voltage Drain Current ($V_{DS} = \text{Rated } V_{DS}, V_{GS} = 0$) ($V_{DS} = \text{Rated } V_{DS}, V_{GS} = 0, T_J = 125^\circ\text{C}$)	I_{DSS}	-	0.2 1	mAdc
Gate-Body Leakage Current, Forward ($V_{GSF} = 20\text{ Vdc}, V_{DS} = 0$)	I_{GSSF}	-	100	nAdc
Gate-Body Leakage Current, Reverse ($V_{GSR} = 20\text{ Vdc}, V_{DS} = 0$)	I_{GSR}	-	100	nAdc

ON CHARACTERISTICS*

Gate Threshold Voltage ($V_{DS} = V_{GS}, I_D = 1\text{mA}$) ($T_J = 100^\circ\text{C}$)	$V_{GS(th)}$	2 1.5	4.5 4	Vdc
Static Drain-Source On-Resistance ($V_{GS} = 10\text{ Vdc}, I_D = 7\text{ Adc}$)	$r_{DS(on)}$	-	0.4	Ohm
Drain-Source-On-Voltage ($V_{DS} = 10\text{ V}$) ($I_D = 12\text{ Adc}$) ($I_D = 7\text{ Adc}, T_J = 100^\circ\text{C}$)	$V_{DS(on)}$	-	6 5.4	Vdc
Forward Transconductance ($V_{GS} = 15\text{ V}, I_D = 7\text{A}$)	g_{FS}	4	-	mhos

DYNAMIC CHARACTERISTICS

Input Capacitance ($V_{DS} = 25\text{V}, V_{GS} = 0, f = 1\text{MHz}$)	C_{iss}	2300 (Typ)	-	pF
Output Capacitance	C_{oss}	330 (Typ)	-	
Reverse Transfer Capacitance	C_{rss}	155 (Typ)	-	

SWITCHING CHARACTERISTICS* ($T_J = 100^\circ\text{C}$)

Turn-On Delay Time ($V_{DS} = 250\text{V}, I_D = 7\text{A}, R_{\theta JA} = 4.7\text{ Ohms}$)	$t_{d(on)}$	-	40	ns
Rise Time	t_r	-	65	
Turn-Off Delay Time	$t_{d(off)}$	-	150	
Fall Time	t_f	-	80	
Total Gate Charge ($V_{DS} = 250\text{V}, I_D = 12\text{A}, V_{GS} = 10\text{V}$)	Q_g	110 (Typ)	160	nC
Gate-Source Charge	Q_{gs}	14 (Typ)	25	
Gate-Drain Charge	Q_{gd}	60 (Typ)	95	

SOURCE-DrAIN DIODE CHARACTERISTICS*

Forward On-Voltage ($I_S = 12\text{A}, V_{GS} = 0$)	V_{SD}	1.1 (Typ)	2	Vdc
Forward Turn-On Time	t_{on}	Limited By Stray Inductance	-	
Reverse Recovery Time	t_r	1200 (Typ)	-	ns

*Pulse Test: Pulse Width = 300 μ s, Duty Cycle $\leq$ 2%.

ELECTRICAL CHARACTERISTICS: Per MOSFET **OM6226SP2 (1000V)** ($T_C = 25^\circ$ unless otherwise noted)

Characteristic	Symbol	Min.	Max.	Units
OFF CHARACTERISTICS				
Drain-Source Breakdown Voltage ($V_{GS} = 0, I_D = 0.25\text{mA}$)	$V_{DS(BR)}$	1000	-	Vdc
Zero Gate Voltage Drain Current ($V_{DS} = \text{Rated } V_{DS}, V_{GS} = 0$) ($V_{DS} = \text{Rated } V_{DS}, V_{GS} = 0, T_J = 125^\circ\text{C}$)	I_{DSS}	-	0.2 1	mAdc
Gate-Body Leakage Current, Forward ($V_{GSF} = 20\text{ Vdc}, V_{DS} = 0$)	I_{GSSF}	-	100	nAdc
Gate-Body Leakage Current, Reverse ($V_{GSR} = 20\text{ Vdc}, V_{DS} = 0$)	I_{GSR}	-	100	nAdc

ON CHARACTERISTICS*

Gate Threshold Voltage ($V_{DS} = V_{GS}, I_D = 1\text{mA}$) ($T_J = 100^\circ\text{C}$)	$V_{GS(th)}$	2 1.5	4.5 4	Vdc
Static Drain-Source On-Resistance ($V_{GS} = 10\text{ Vdc}, I_D = 2.5\text{ Adc}$)	$r_{DS(on)}$	-	3	Ohm
Drain-Source-On-Voltage ($V_{DS} = 10\text{ V}$) ($I_D = 4\text{ Adc}$) ($I_D = 2.5\text{ Adc}, T_J = 100^\circ\text{C}$)	$V_{DS(on)}$	-	15 12.5	Vdc
Forward Transconductance ($V_{GS} = 15\text{ V}, I_D = 2.5\text{A}$)	g_{FS}	2	-	mhos

DYNAMIC CHARACTERISTICS

Input Capacitance ($V_{DS} = 25\text{V}, V_{GS} = 0, f = 1\text{MHz}$)	C_{iss}	2200 (Typ)	-	pF
Output Capacitance	C_{oss}	220 (Typ)	-	
Reverse Transfer Capacitance	C_{rss}	100 (Typ)	-	

SWITCHING CHARACTERISTICS* ($T_J = 100^\circ\text{C}$)

Turn-On Delay Time ($V_{DS} = 250\text{V}, I_D = 2.5\text{A}, R_{\theta JA} = 4.7\text{ Ohms}$)	$t_{d(on)}$	-	40	ns
Rise Time	t_r	-	60	
Turn-Off Delay Time	$t_{d(off)}$	-	160	
Fall Time	t_f	-	80	
Total Gate Charge ($V_{DS} = 400\text{V}, I_D = 4\text{A}, V_{GS} = 10\text{V}$)	Q_g	110 (Typ)	140	nC
Gate-Source Charge	Q_{gs}	14 (Typ)	25	
Gate-Drain Charge	Q_{gd}	50 (Typ)	90	

SOURCE-DrAIN DIODE CHARACTERISTICS*

Forward On-Voltage ($I_S = 4\text{A}, V_{GS} = 0$)	V_{SD}	-	1.6	Vdc
Forward Turn-On Time	t_{on}	Limited By Stray Inductance	-	
Reverse Recovery Time	t_r	1.2 (Typ)	-	μ s

*Pulse Test: Pulse Width = 300 μ s, Duty Cycle $\leq$ 2%.



ABSOLUTE MAXIMUM RATINGS: ($T_c = 25^\circ\text{C}$ unless otherwise noted)

Parameter	OM6223	OM6224	OM6225	OM6226	Units
V_{DS} Drain-Source Voltage	100	200	500	1000	V
V_{DGR} Drain-Gate Voltage ($R_{GS} = 1\text{M}\Omega$)	100	200	500	1000	V
$I_D @ T_c = 25^\circ\text{C}$ Continuous Drain Current	30	25	12	4	A
V_{GS} Continuous Gate-Source Voltage	± 20	± 20	± 20	± 20	V
V_{GSM} Gate-Source Voltage Non-Repetitive ($t_p \leq 50\mu\text{s}$)	± 40	± 40	± 40	± 40	V
I_{DM} Pulsed Drain Current ¹	90	50	60	15	A
$P_D @ T_c = 25^\circ\text{C}$ Max. Power Dissipation	125	125	125	125	W
$P_D @ T_c = 100^\circ\text{C}$ Max. Power Dissipation	50	50	50	50	W
Junction to Case Linear Derating Factor ¹	1.0	1.0	1.0	1.0	W/ $^\circ\text{C}$
Junction to Ambient Linear Derating Factor	.025	.025	.025	.025	W/ $^\circ\text{C}$
T_J Operating and T_{sig} Storage Temperature Range	-65 to 125	-65 to 125	-65 to 125	-65 to 125	$^\circ\text{C}$
Lead Temperature ($1/8"$ from case for 5 seconds)	225	225	225	225	$^\circ\text{C}$

¹ Pulse Test: Pulse Width $\leq 300\mu\text{sec}$, Duty Cycle $\leq 2\%$.

THERMAL RESISTANCE (MAXIMUM) at $T_A = 25^\circ\text{C}$

$R_{\theta JC}$ Junction-to-Case	1.0	$^\circ\text{C/W}$
$R_{\theta JA}$ Junction-to-Ambient	40	$^\circ\text{C/W}$ Free Air Operation

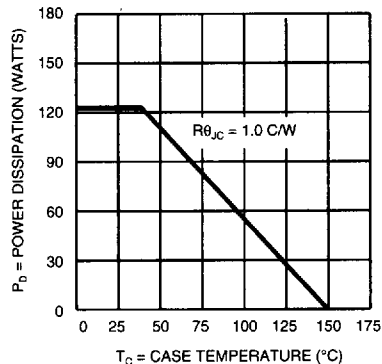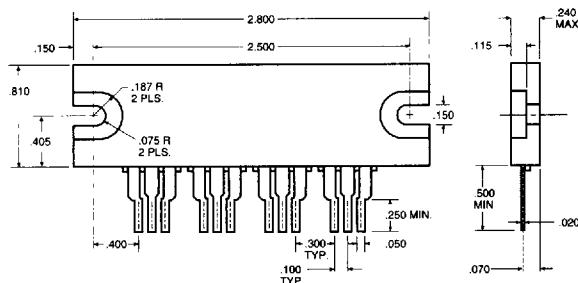POWER DERATING**MECHANICAL OUTLINE**

All Dimensions are $\pm .010$ Unless Otherwise Specified.