

GENERAL DESCRIPTION

The OCS33 is an optical PNP switch, combining a GaAs infrared light emitting diode and a silicon PNP photo sensor in a single 8-pin plastic package. The GaAs light emitting diode acts as the input element of the switch, activating the output photo sensor when the light emitting diode is turned on. The device is capable of withstanding high voltages.

The OCS33 is designed for extended life-time operation, making the device ideal for applications such as communications and telephone switching equipment.

FEATURES


- Forward blocking voltage (V_{BO} , V_{BD}): 320 V (Min.)
- Trigger input current (I_{GO}): 15 mA (Max.)

APPLICATIONS


- Electronic automatic exchange
- Key telephone system
- Contactless switch
- Optically coupled transistor circuit.

PIN CONFIGURATION

(Unit: mm)

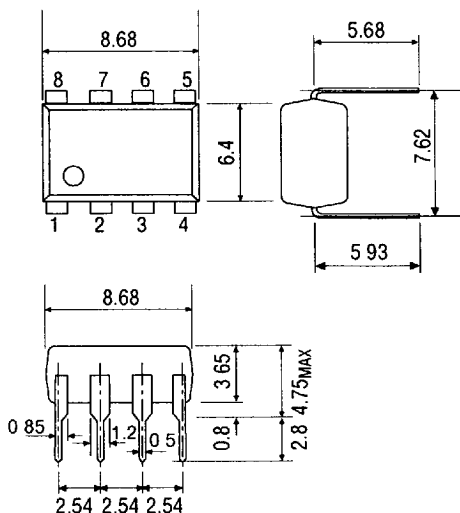

• Pin Connection Diagram



- 1: Anode (LED)
- 2: NC
- 3: NC
- 4: Cathode (LED)
- 5: Output PNP
- 6: NC
- 7: Output PNP
- 8: Output PNP

ABSOLUTE MAXIMUM RATINGS

(Ambient Temperature $T_a=25^{\circ}\text{C}$)

	Parameter	Symbol	Rating	Unit
Input (LED)	Forward Current	I_G	60	mA
	Reverse Voltage	V_{RL}	5	V
Output (PNPN)	Forward Blocking Voltage	V_{BO}	350	V
	Reverse Voltage	V_{BD}	350	V
	Continuous ON-State Current	I_F	100	mA
	Surge ON-State Current *	I_{SUG}	1.4	A
Isolation Voltage		V_{I-O}	1500	V
Operating Temperature		T_{opr}	-20 to +70	$^{\circ}\text{C}$
Storage Temperature		T_{stg}	-30 to +100	$^{\circ}\text{C}$

* At pulse width 1 ms once

- Wavelength at Peak Emission

Light source : 940 nm

Photodetector: 940 nm


ELECTRICAL CHARACTERISTICS

(Ambient Temperature $T_a=25^{\circ}\text{C}$)


	Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Input Characteristics	Forward Voltage	V_{FL}	$I_G=40\text{ mA}$	—	—	1.4	V
	Reverse Current	I_{RL}	$V_{RL}=5\text{ V}$	—	—	5	μA
Output Characteristics	OFF-State Current	I_{BO}	$V_{AK}=320\text{ V}$	—	—	5	μA
	Reverse Voltage	I_{BD}	$V_{AK}=320\text{ V}$	—	—	5	μA
	ON-State Voltage	V_F	$I_F=20\text{ mA}, I_G=40\text{ mA}$	—	—	1.0	V
	dV/dt Capability	dV/dt	dt=0.1 μs	120	—	—	V/0.1 μs
Coupled Characteristics	Holding Current	I_H	ON to OFF	—	—	1.3	mA
	Trigger Input Current	I_{GO}	$V_{AK}=500\text{ VDC}$	—	—	15	mA

TYPICAL CHARACTERISTICS


- ON-State Current vs. ON-State Voltage ($T_a=25^{\circ}\text{C}$)

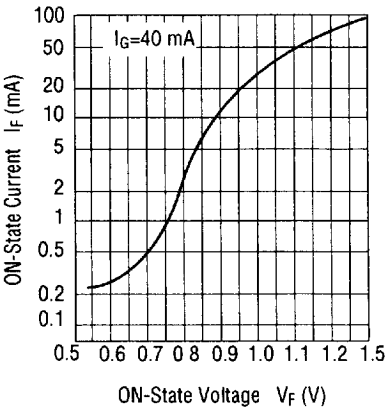


- Trigger Input Current vs. Ambient Temperature

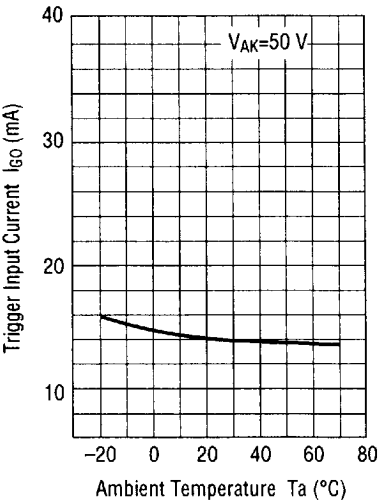

- **Trigger Input Current vs. Anode-Cathode Voltage ($T_a=25^\circ\text{C}$)**

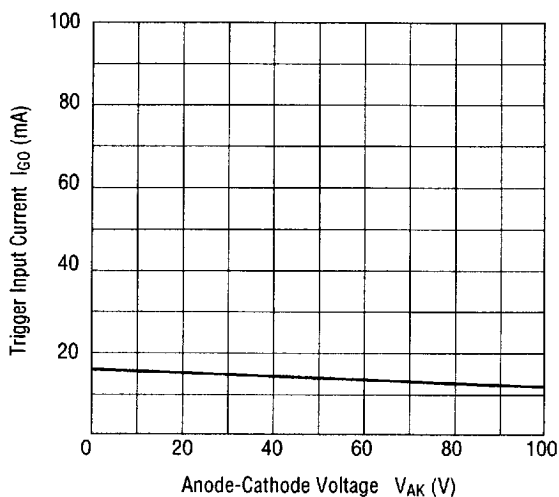


- **Trigger Input Current vs. Drive Pulse Width ($T_a=25^\circ\text{C}$)**

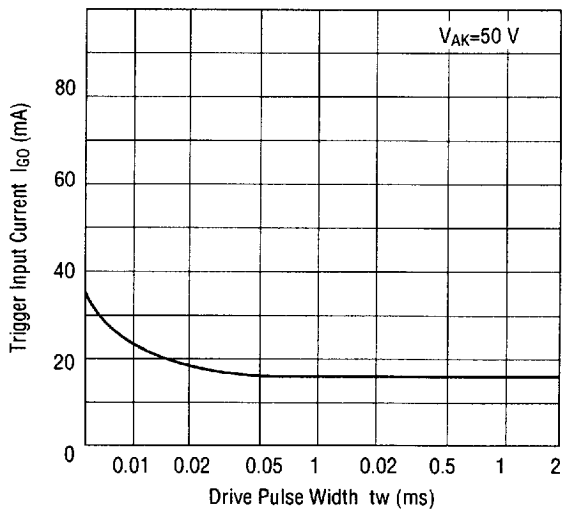


■ 6724240 0018984 065 ■


• Turn On Time vs. LED Forward Current ($T_a=25^\circ\text{C}$)

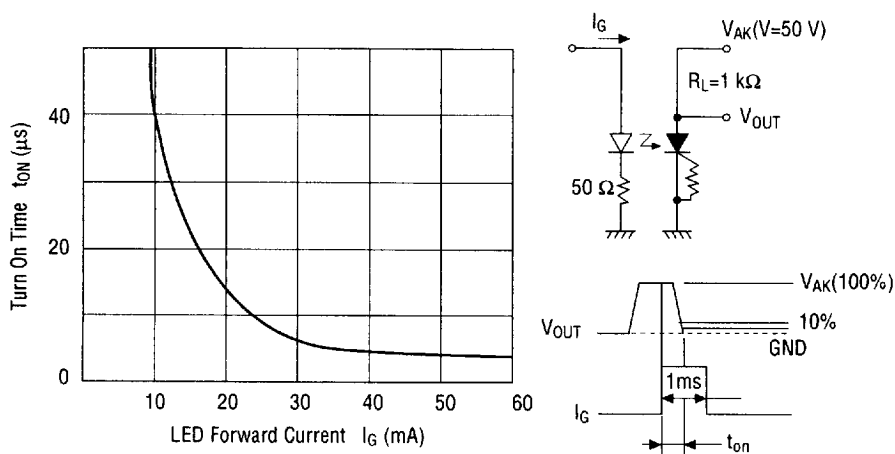

• dV/dt Capability vs. Ambient Temperature

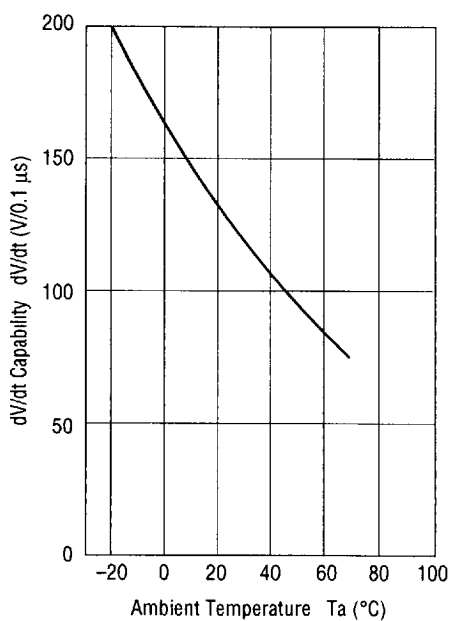

- Input LED Forward Current vs. Voltage

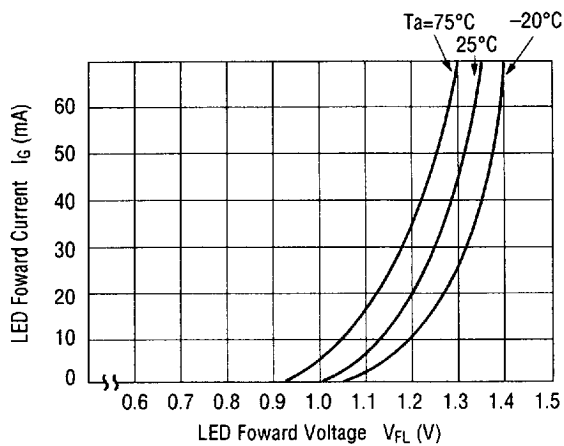

6724240 0018986 938