

54ACT11004, 74ACT11004
HEX INVERTERS

T-43-21-00

T10045—D2957, JANUARY 1988—REVISED MARCH 1990

- Inputs are TTL-Voltage Compatible
- Flow-Through Architecture to Optimize PCB Layout
- Center-Pin VCC and GND Configurations to Minimize High-Speed Switching Noise
- EPIC™ (Enhanced-Performance Implanted CMOS) 1-μm Process
- 500-mA Typical Latch-Up Immunity at 125°C
- Package Options Include Plastic "Small Outline" Packages, Ceramic Chip Carriers, and Standard Plastic and Ceramic 300-mil DIPs

description


These devices contain six independent inverters. They perform the Boolean function $Y = \overline{A}$.

The 54ACT11004 is characterized for operation over the full military temperature range of -55°C to 125°C. The 74ACT11004 is characterized for operation from -40°C to 85°C.

FUNCTION TABLE
(each Inverter)


INPUT	OUTPUT
A	Y
H	L
L	H

logic symbol†




† This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.
Pin numbers shown are for DW, J, and N packages.

54ACT11004 ... J PACKAGE
74ACT11004 ... DW OR N PACKAGE
(TOP VIEW)




54ACT11004 ... FK PACKAGE
(TOP VIEW)



NC—No internal connection

logic diagram (positive logic)

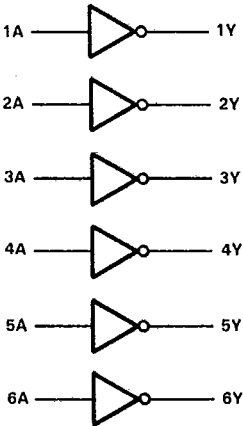

EPIC is a trademark of Texas Instruments Incorporated.

PRODUCTION DATA documents contain information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 1990, Texas Instruments Incorporated



POST OFFICE BOX 655303 • DALLAS, TEXAS 75285

TI0045—D2957, JANUARY 1988—REVISED MARCH 1990

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

Supply voltage range, V _{CC}	−0.5 V to 7 V
Input voltage range, V _I (see Note 1)	−0.5 V to V _{CC} + 0.5 V
Output voltage range, V _O (see Note 1)	−0.5 V to V _{CC} + 0.5 V
Input clamp current, I _{IK} (V _I < 0 or V _I > V _{CC})	±20 mA
Output clamp current, I _{OK} (V _O < 0 or V _O > V _{CC})	±50 mA
Continuous output current, I _O (V _O = 0 to V _{CC})	±50 mA
Continuous current through V _{CC} or GND pins	±150 mA
Storage temperature range	−65°C to 150°C

† Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

recommended operating conditions

		54ACT11004		74ACT11004		UNIT
		MIN	MAX	MIN	MAX	
V _{CC}	Supply voltage	4.5	5.5	4.5	5.5	V
V _{IH}	High-level input voltage	2		2		V
V _{IL}	Low-level input voltage		0.8		0.8	V
V _I	Input voltage	0	V _{CC}	0	V _{CC}	V
V _O	Output voltage	0	V _{CC}	0	V _{CC}	V
I _{OH}	High-level output current		−24		−24	mA
I _{OL}	Low-level output current		24		24	mA
Δt/Δv	Input transition rise or fall rate	0	10	0	10	ns/V
T _A	Operating free-air temperature	−55	125	−40	85	°C

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	V _{CC}	T _A = 25°C			54ACT11004		74ACT11004		UNIT
			MIN	TYP	MAX	MIN	MAX	MIN	MAX	
V _{OH}	I _{OH} = −50 μA	4.5 V	4.4			4.4		4.4		V
		5.5 V	5.4			5.4		5.4		
	I _{OH} = −24 mA	4.5 V	3.94			3.7		3.8		
		5.5 V	4.94			4.7		4.8		
	I _{OH} = −50 mA‡	5.5 V				3.85				
	I _{OH} = −75 mA‡	5.5 V						3.85		
V _{OL}	I _{OL} = 50 μA	4.5 V		0.1		0.1		0.1		V
		5.5 V		0.1		0.1		0.1		
	I _{OL} = 24 mA	4.5 V		0.36		0.5		0.44		
		5.5 V		0.36		0.5		0.44		
	I _{OL} = 50 mA‡	5.5 V				1.65				
	I _{OL} = 75 mA‡	5.5 V						1.65		
I _I	V _I = V _{CC} or GND	5.5 V		±0.1		±1		±1		μA
I _{CC}	V _I = V _{CC} or GND, I _O = 0	5.5 V		4		80		40		μA
ΔI _{CC} §	One input at 3.4 V, Other inputs at GND or V _{CC}	5.5 V		0.9		1		1		mA
C _I	V _I = V _{CC} or GND	5 V		3.5						pF

‡ Not more than one output should be tested at a time, and the duration of the test should not exceed 10 ns.

§ This is the increase in supply current for each input that is at one of the specified TTL voltage levels rather than 0 V or V_{CC}.

54ACT11004, 74ACT11004
HEX INVERTERS

T-43-21

D2957, JANUARY 1988—REVISED MARCH 1990—T10045


switching characteristics, $V_{CC} = 5\text{ V} \pm 0.5\text{ V}$ (see Figure 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	$T_A = 25^\circ\text{C}$			54ACT11004		74ACT11004		UNIT
			MIN	TYP	MAX	MIN	MAX	MIN	MAX	
t_{PLH}	A	Y	1.5	5.3	9	1.5	10.2	1.5	9.7	ns
t_{PHL}			1.5	6.4	8.7	1.5	10.3	1.5	9.6	

operating characteristics, $V_{CC} = 5\text{ V}$, $T_A = 25^\circ\text{C}$

PARAMETER	TEST CONDITIONS	TYP	UNIT
C_{pd} Power dissipation capacitance per inverter	$C_L = 50\text{ pF}$, $f = 1\text{ MHz}$	32	pF

PARAMETER MEASUREMENT INFORMATION

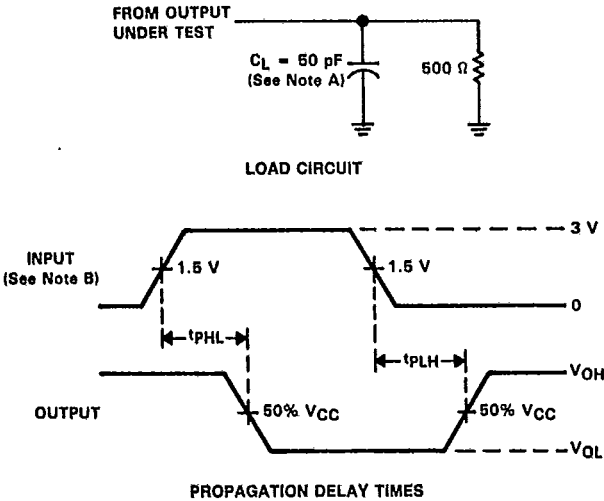

- NOTES: A. C_L includes probe and jig capacitance.
B. Input pulses are supplied by generators having the following characteristics: $PRR \leq 10\text{ MHz}$, $Z_O = 50\text{ }\Omega$, $t_r = 3\text{ ns}$, $t_f = 3\text{ ns}$.
C. The outputs are measured one at a time with one input transition per measurement.

FIGURE 1. LOAD CIRCUIT AND VOLTAGE WAVEFORMS