

PRODUCT NUMBER

71600-YXX

TOTAL NB OF POSITION 04 TO 64
SEE SHEET 2

OPTIONAL STRAIN RELIEF
SEE SHEET 2

TRIANGLE INDICATES
POSITION 1


LEFT POLARIZING

RIGHT POLARIZING

CENTRAL KEY

NEW LATCH DESIGN


SEE NOTE 5

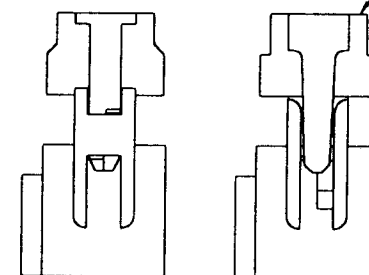

6.1 MAX


NOTES:

- HOUSING MAT L : GLASS FILLED HIGH TEMPERATURE THERMOPLASTIC. UL94V-0 COLOR: GREY
- PIN MATERIAL : PHOSPHOR BRONZE
- PRODUCT PACKAGED IN TUBES.
- TO DETERMINE DIMENSIONS :
N = NUMBER OF POSITIONS
EXAMPLE : 8 POS $N \times 2.54 = 20.32\text{mm}$
- THE DASH "L" AT THE END OF THE PART NUMBER TO INDICATE A NEW LATCH DESIGN.
"COVER LATCH STYLE" IS THE MANUFACTURER'S OPTION (P/N ENDING WITH OR WITHOUT AN "L").

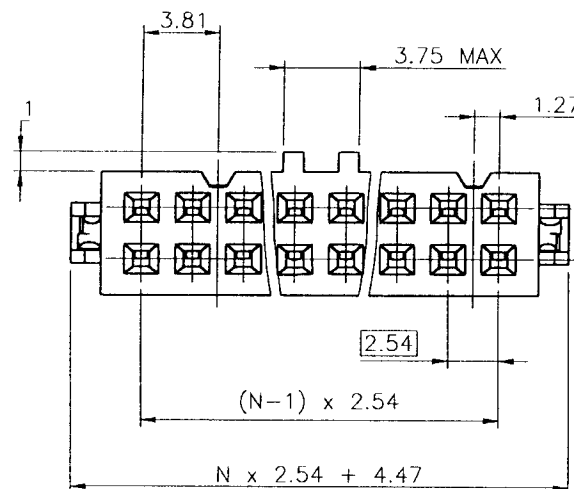

COVER ORIENTATION

CABLE ENTRY
TRIANGLE SIDE



D D SECTION

mat'l. code				tolerances unless otherwise specified				CUSTOMER COPY		FCI ELECTRONICS	
SEE NOTES								projection		www.fciconnect.com	
ltr	ecr no	dr	date	linear				title		IDC RECEPT.	
Y	V91355	DLE	99.06.25	angles				product family		QUICKIE	
AA	F10121	DLE	01.01.24					size		213	
AB	F10199	GCO	01.04.26					scale		5:1	
AC	V11866	DLE	01.07.20	dr	D.LE	01.01.24		sheet		1 of 2	
				engr	P.NZ	01.01.24		revision		1 2	
				chr	JF.N	01.01.24		sheet		1 of 2	
				appd	P.NZ	01.01.24		index			

This series encompasses various configurations in accordance with the following table. The table lists the available configurations and the corresponding part numbers. The table is subject to change without notice.

FCI

All rights are reserved. Reproduction in whole or in part without the written permission of FCI is prohibited.

CORE RANGE

STRAIN RELIEF	Nbr OF POSITIONS
0/1	04
0/1	06
0/1	08
0/1	10
0/1	14
0/1	16
0/1	20
0/1	24
0/1	26
0/1	30
0/1	34
0/1	40
0/1	50
0/1	60
0/1	64

PLATING

0.76µm GOLD ON CONTACT AREA
1.27 µm Ni REMAINDER OF PRODUCT

CATALOGUE RANGE

STRAIN RELIEF	Nbr OF POSITIONS
2/6	04
2/6	06
2/6	08
2/6	10
2/6	14
2/6	16
2/6	20
2/6	24
2/6	26
2/6	30
2/6	34
2/6	40
2/6	50
2/6	60
2/6	64

PLATING

0.76µm GOLD ON CONTACT AREA
1.27 µm Ni REMAINDER OF PRODUCT


624

304


204 / 224

004


DASHES NOT AVAILABLE




WITHOUT STRAIN RELIEF




WITH LOW PROFILE STRAIN RELIEF




WITH STANDARD STRAIN RELIEF




WITH LATCHING STRAIN RELIEF



LOW PROFILE STRAIN RELIEF



STANDARD STRAIN RELIEF

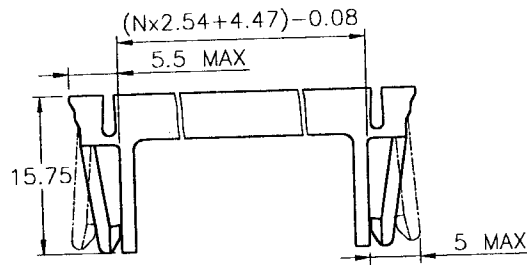

LATCHING STRAIN RELIEF FOR SLIM HEADER

PRODUCT NUMBER	WITH CENTRAL KEY	WITHOUT CENTRAL KEY	STANDARD	WITHOUT STANDARD	LOW PROFILE	LATCHING
71600-6YY	●	●	●			●
71600-3YY		●	●		●	
71600-2YY	●			●		
71600-1YY	●			●		
71600-0YY	●		●			

mat'l code				tolerances unless otherwise specified				CUSTOMER COPY		ELECTRONICS www.fciconnect.com			
ltr	ecr no	dr	date	linear				projection	title IDC RECEIPT DR				
X	F70666	AAN	97.11.05						product family		code		
Y	F10121	DLE	01.01.24						QUICKIE		213		
AA	F10199	GCO	01.04.26								sheet		
				angles					mm	size		dwg no	
				dr	D.LE	01.01.24					A3		71600
				engr	P.NZ	01.01.24							
				chr	JF.N	01.01.24							
				appd	P.NZ	01.01.24							
sheet index	revision sheet												