


The transformer circuitry is packaged in an epoxy housing. All models are designed to meet MIL-T-55631 and are recommended for use over the -54°C to $+100^{\circ}\text{C}$ temperature range.

Header: Glossy red Diallyl
Phthalate
Leads: Silver plated per
QQ-S-365A, Type I, Grade B

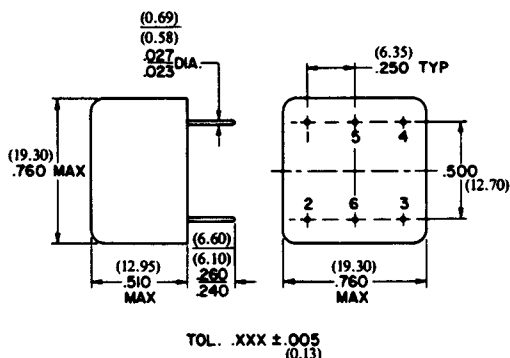

8.10.04 Rev. A