




MX1400

Size: C (LR14)


Alkaline-Manganese Dioxide Battery

Zn/MnO₂

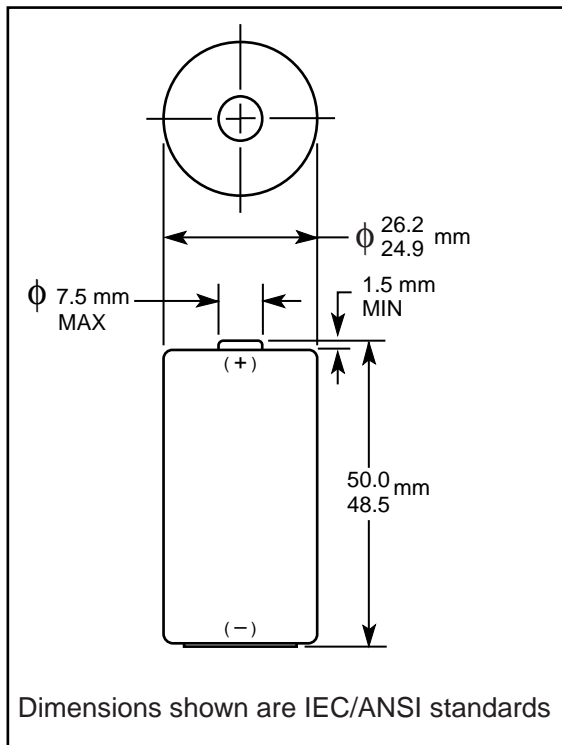


Nominal Voltage:	1.5 V
Nominal Internal Impedance:	210 m-ohm @ 1kHz
Average Weight:	71.7 gm (2.53 oz.)
Volume:	26.9 cm ³ (1.64 in. ³)
Terminals:	Flat
Operating Temperature Range:	-20°C to 54°C (-4°F to 130°F)
NEDA/ANSI:	14A
IEC:	LR14

Discharge Characteristics at Various Power Drains

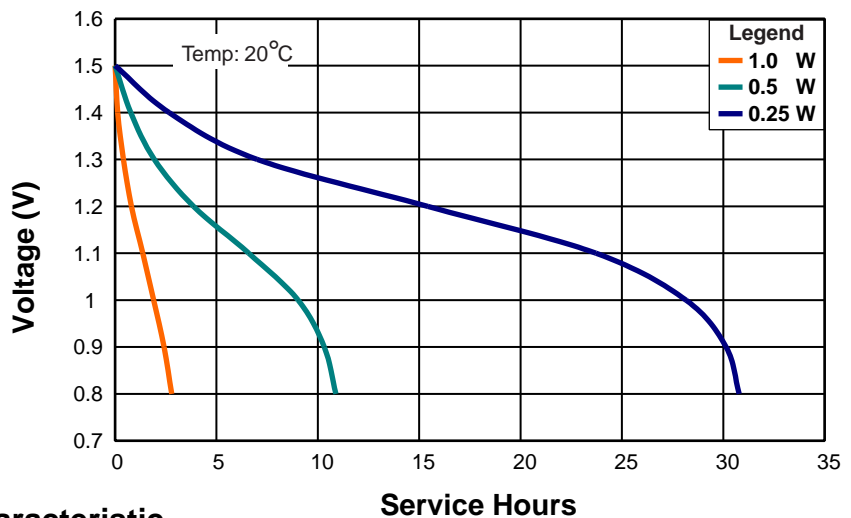

Typical Ultra C Discharge Characteristic

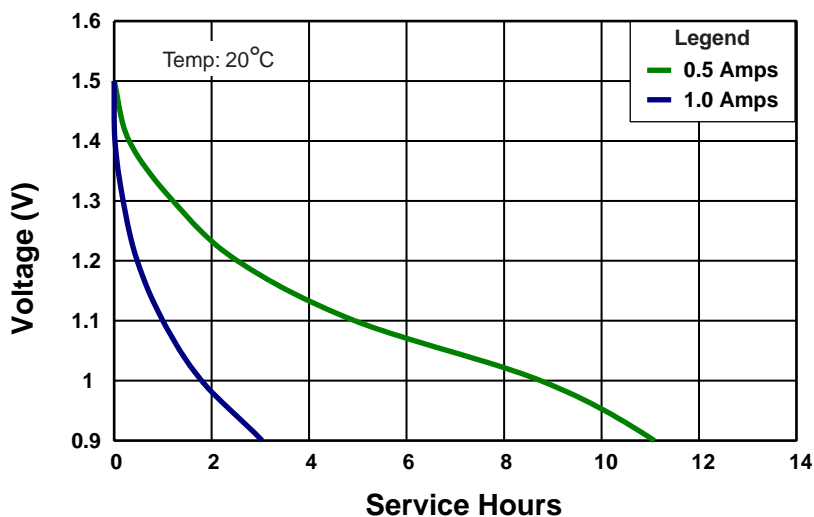


* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.




MX1400
Size: C (LR14)
Alkaline-Manganese Dioxide Battery

Zn/MnO₂


Delivered Energy vs Power Drain

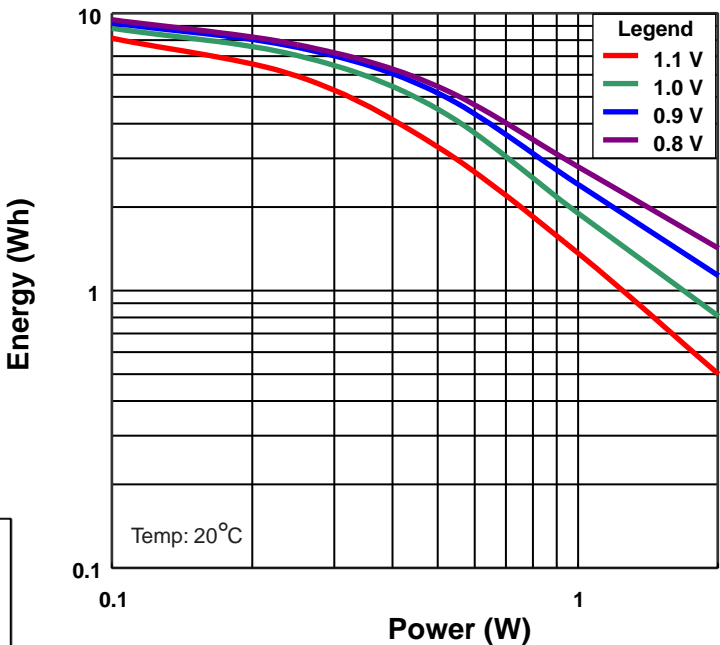

Delivered Capacity vs Power Drain

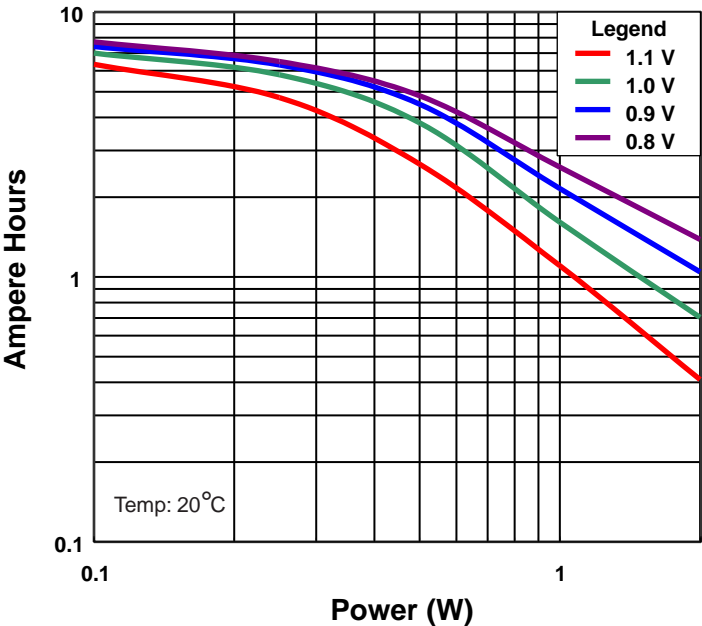

Service Hours vs Power Drain

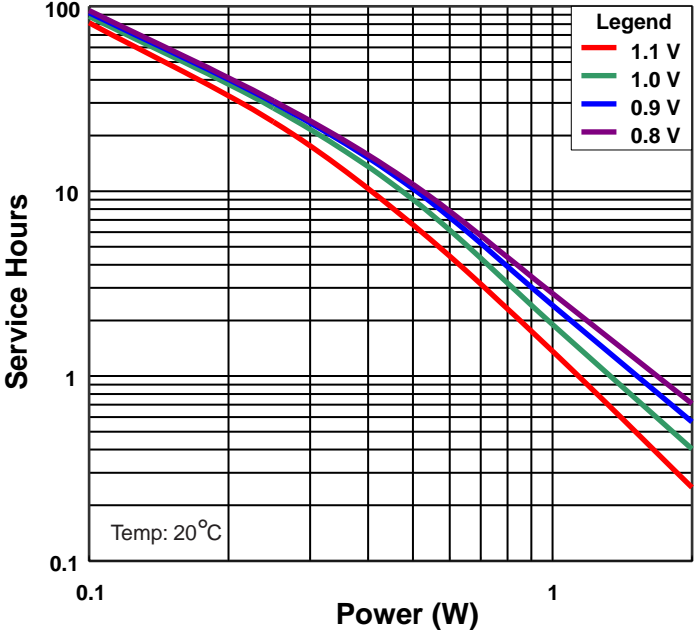

DURACELL®
BATTERIES

Berkshire Corporate Park
Bethel, CT 06801 U.S.A.
Internet: www.duracell.com
Facsimile: 203-796-4209

* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.