


*Series*  
**D**

# **PROFESSIONAL CONNECTOR PROGRAMME**



**CEEP**

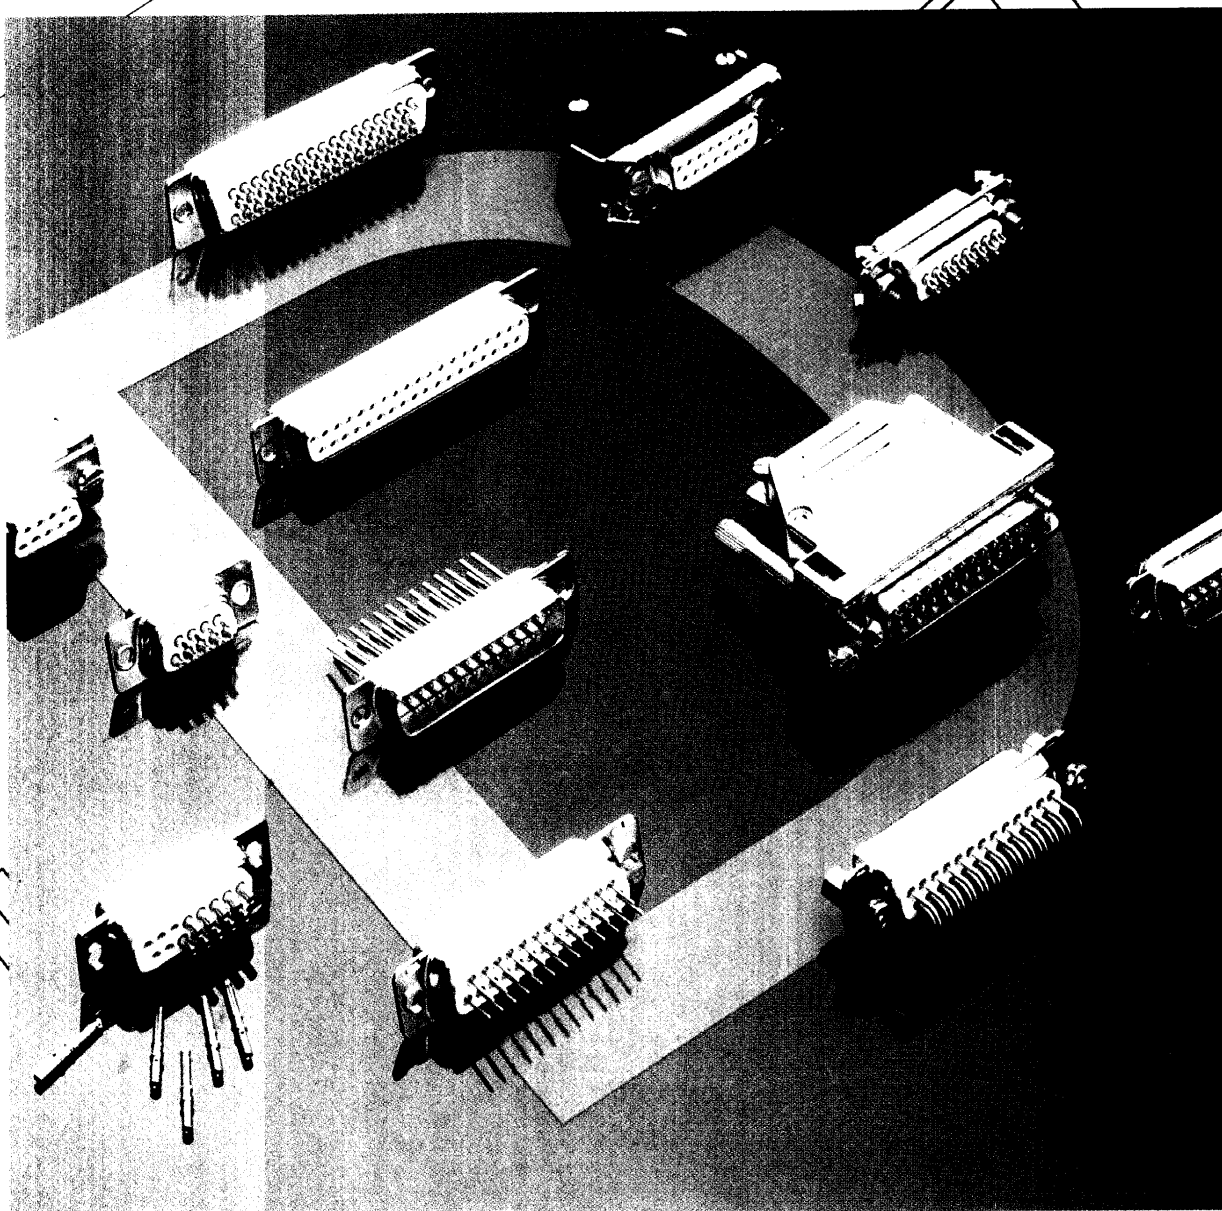

## MAKING CONNECTIONS

When it comes to making connections that count, CEEP Ltd certainly has all the right credentials. Established for over 20 years internationally and in the UK for more than 10 years, CEEP Ltd is already well known to its many customers and dealers as a market leader in the design, manufacture and supply of advanced electrical interconnection systems.

Our product range includes "D" connectors, circular and rectangular connectors, hoods and an extensive range of accessories. The integrity and effectiveness of CEEP components is well established and continually demonstrated, and is subject to an on-going programme of research and development.

By combining our extensive design facilities with considerable experience of all major industrial, commercial and professional sectors, customers can be certain of always making the right connection.

## INDEX

Technical Data .....	3
Shell Dimensions .....	4
Contact Terminations .....	4
Contact layout and Identification .....	5
Part Numbers for DX Connectors .....	6
Part Numbers for DN Connectors .....	6
DN Tools .....	7
Filter D Connectors .....	8
Hermetic D Connectors .....	9
Stacked D Connectors .....	10
Board Drilling Details .....	11
Screwlock System Hoods .....	12
Slidelock System Hoods .....	13
Locking Devices .....	14
Mounting Systems .....	15

## TECHNICAL DATA

### DX Series

#### Materials

Connector shell \_\_\_ Mild steel  
Connector moulding \_ Thermoplastic UL94V0

Contacts \_ \_ \_ \_ \_ Turned copper alloy

Plating, shells \_ \_ \_ Zinc/yellow passivate or  
electro tin

Contacts \_ \_ \_ \_ \_ Hard acid gold on nickel

#### Performance

Operating temperature \_ -55 °C to +125 °C  
Working voltage \_ \_ \_ \_ \_ 500V DC or AC peak  
at sea level  
Proof voltage \_ \_ \_ \_ \_ 500V DC or AC peak

Contact resistance \_ \_ \_ 10 mohm  
Working current \_ \_ \_ \_ \_ 7.5A per contact in  
isolation  
5.0A all contacts  
simultaneously

Insulation resistance \_ \_ 10<sup>6</sup> Mohm  
Mechanical endurance \_ \_ 500 operations

### FDX Series

A filtered version of the DX connector, and dimensionally identical. For performance parameters see page 8.

#### Materials

Connector shell \_\_\_ Mild steel  
Connector moulding \_ Thermoplastic UL94V0  
Contacts \_ \_ \_ \_ \_ Turned copper alloy

Plating, shells \_ \_ \_ Electro tin on nickel  
Contacts \_ \_ \_ \_ \_ Hard acid gold on nickel

### DN Series

#### Materials

Connector shell \_\_\_ Mild steel  
Connector moulding \_ Monobloc, Thermoplastic  
UL 94 V0

Contacts \_ \_ \_ \_ \_ Turned copper alloy

Plating, shells \_ \_ \_ Zinc/yellow passivate or  
nickel

Contacts \_ \_ \_ \_ \_ Hard acid gold on nickel

#### Performance

Operating temperature \_ -55 °C to +90 °C  
Working voltage \_ \_ \_ \_ 250V AC rms  
Proof voltage \_ \_ \_ \_ \_ 1000V AC rms at sea  
level

Contact resistance \_ \_ \_ <5 mohm

Working current \_ \_ \_ \_ 7.5A per contact in  
isolation  
5.0A all contacts  
simultaneously

Insulation resistance \_ \_ 10<sup>6</sup> Mohm  
Mechanical endurance \_ 500 operations

### DH Series Hermetic Ds

#### Materials

Connector shell \_\_\_ Steel  
Seal \_ \_ \_ \_ \_ Boro silicate glass  
Contacts \_ \_ \_ \_ \_ Steel, nickel, cobalt alloy

Plating, shells \_ \_ \_ 4μ silver tin alloy  
Contacts \_ \_ \_ \_ \_ Hard acid gold on nickel  
(or tin on nickel also  
available on request)  
(Shells also available  
zinc/passive or nickel  
(to be requested))


#### Performance

Operating temperature \_ -55 °C to +175 °C  
Working voltage \_ \_ \_ \_ 250V AC rms  
Proof voltage \_ \_ \_ \_ \_ 750V AC rms

Contact resistance \_ \_ \_ 10mΩ  
Working current \_ \_ \_ \_ 5.0A all contacts  
simultaneously


Insulation resistance \_ \_ 5000MΩ at 500v DC

Leakage \_ \_ \_ \_ \_ <10<sup>-4</sup> cm<sup>3</sup> at 1


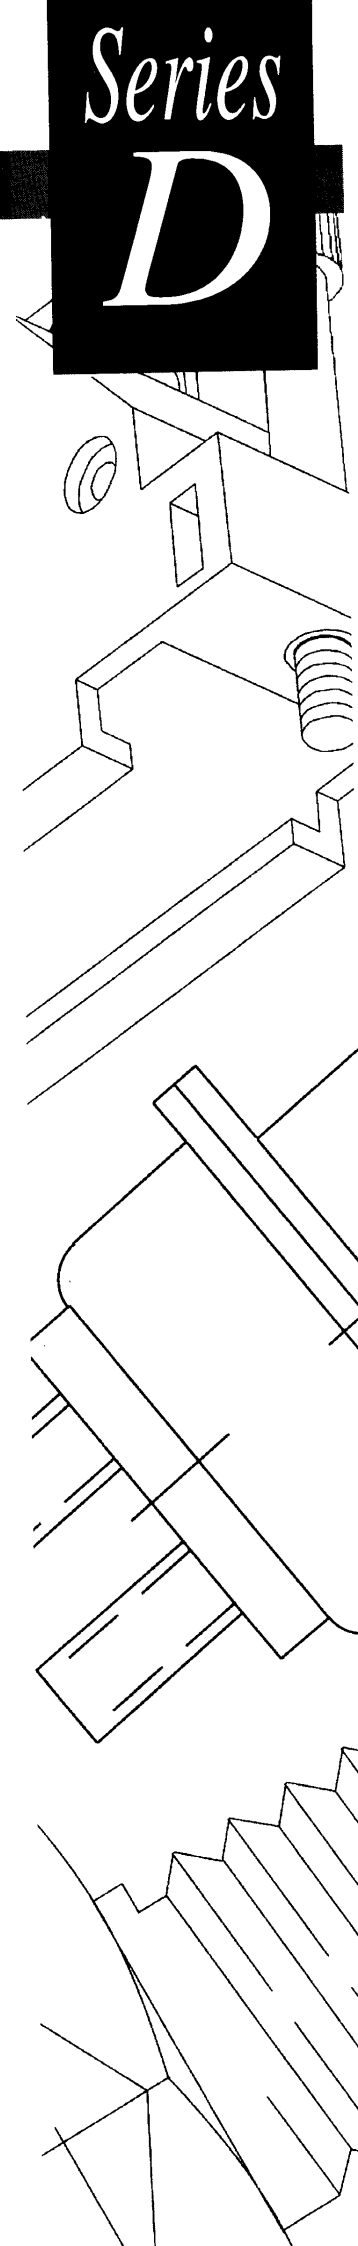


# OUTLINE DIMENSIONS


## Shell Dimensions

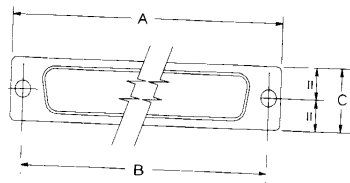


Panel Cut Out

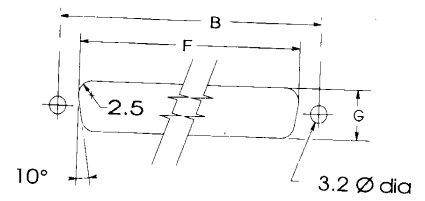

Rear Mounting

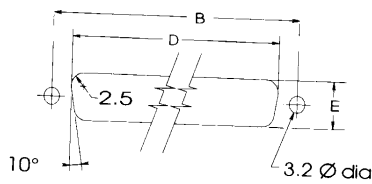


Front Mounting

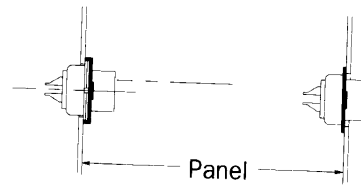


Shell Size	A-0.2	B±0.1	C-0.2	D±0.2	E±0.2	F±0.2	G±0.2
9 way	30.8	25.0	12.4	22.2	13.0	20.5	11.4
15 way	39.2	33.3	12.4	30.5	13.0	28.8	11.4
25 way	53.1	47.0	12.4	44.3	13.0	42.5	11.4
37 way	69.5	63.5	12.4	60.7	13.0	59.1	11.4
50 way	67.0	61.1	15.4	58.3	15.8	56.3	14.1


## Contact Terminations




**Z**  
Solder Bucket




**X**  
Crimp DN Series




**Y**  
Straight Flow Solder



**W3**  
Wire Wrap



**YC**  
Right Angle Flow Solder



**YC**

# CONTACT LAYOUT & IDENTIFICATION

Series  
**D**

## Board Drilling Detail

Dimensions shown in mm

AA' = reference axis.

Positional tolerance of holes is 0.1mm from theoretical.











\*Recommended hole: 0.8 to 1mm.

Pitch between rows is 2.54mm for YC termination connectors.

## Contact Identification

Male Connectors mating face.

Female Connectors wiring face.

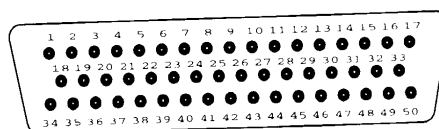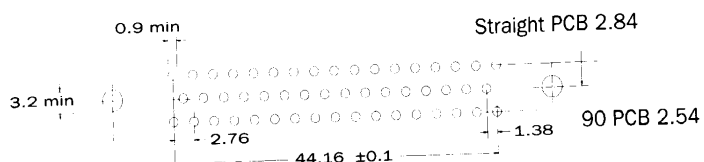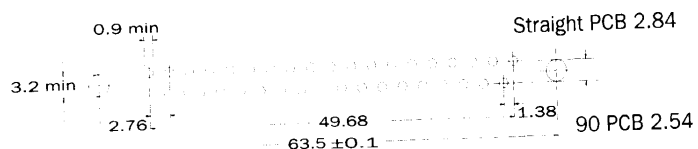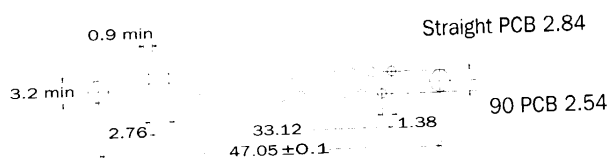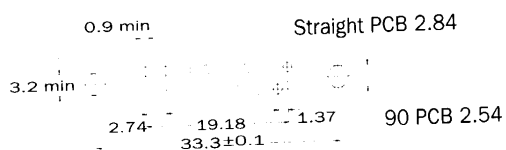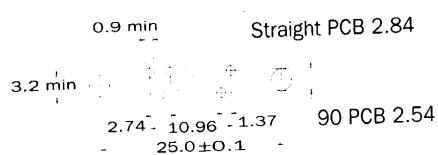

## GENERAL DATA

### Part Numbers for DX Connectors




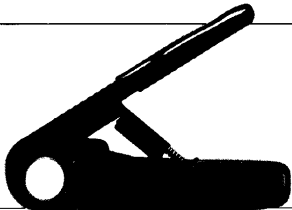
	DX	09	P	Z	TD	00
Series DX	_____	_____	_____	_____	_____	_____
No. of ways	09, 15, 25, 37, or 50	_____	_____	_____	_____	_____
Gender	P = plug	_____	_____	_____	_____	_____
	S = socket	_____	_____	_____	_____	_____
Contract style	Z = solder bucket	_____	_____	_____	_____	_____
	Y = straight pcb	_____	_____	_____	_____	_____
	YC = right angled pcb	_____	_____	_____	_____	_____
	W3 = wire wrap	_____	_____	_____	_____	_____
Shell finish	TD = tin/dimple (plug)	_____	_____	_____	_____	_____
	T = tin finish (socket)	_____	_____	_____	_____	_____
	Omitted = standard zinc passivate	_____	_____	_____	_____	_____
* Customer variant - Please consult office	_____	_____	_____	_____	_____	_____

### Part Numbers for DN Connectors

	DN	T	25	S	X	00
Series DN	_____	_____	_____	_____	_____	_____
Shell finish	T = Tin plated (socket)	_____	_____	_____	_____	_____
	D = Tin (dimpled), plug only	_____	_____	_____	_____	_____
	(-) = Plain	_____	_____	_____	_____	_____
No. of ways	9, 15, 25, 37 or 50	_____	_____	_____	_____	_____
Gender	P = Plug	_____	_____	_____	_____	_____
	S = Socket	_____	_____	_____	_____	_____
	No Contacts	_____	_____	_____	_____	_____
* Customer variant - Please consult office	_____	_____	_____	_____	_____	_____

Order connector and crimp contacts separately ie. DN25PX = 25 plug housing  
 PX/100 = male crimp pins (supplied in bags of 100)  
 SX/100 = female crimp pins (supplied in bags of 100)

## DN TOOLS

Ref. 701	Insertion tool for male and female contacts. Maximum cable Ø including insulation .049 (1.25)	
Ref. 702/3	Removal tool with replaceable head for male and female contacts	
Ref. C202	Replacement tip for contact removal tool	
Ref. 2613-1	Fixed crimp tool for wire gauges 20, 22 and 24 AWG	

### Crimp Tool Information

Crimp contacts (insertable and removable) for thermoplastic insulators (DN) only

Type X crimp contacts (insertable and removable) part numbers:

Ref: male contacts PX

Ref: female contacts SX

Both for crimping wire sizes 20, 22, 24, AWG

Crimp bucket in accordance with MS 18281

Crimp tools conform to MIL -T -22520



SX



PX


Order code: PX/100-pin

SX/100-socket

### Preparing for Crimp Contacts

Wire stripping.

Strip cable insulation as shown in the illustration.




### Contact Crimping

Insert crimp contact (SX or PX) into the tool and push stripped cable into the contact bucket.

Close the crimp tool fully.

The tool will only release when the crimp is completed.

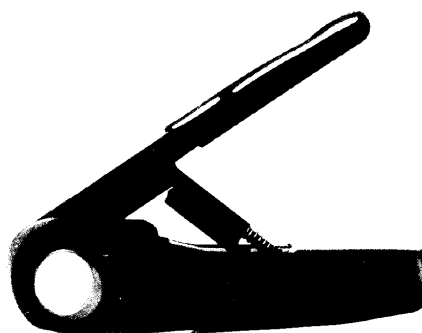

## FILTER D CONNECTORS

Designed to meet all current regulations concerned with EMI/RFI protection.

Connectors are a direct replacement for existing Ds, offering a range of filter values to specific requirements or conditions.

Can be supplied with planar array or tubular filtering of individual contacts.

Connectors meet dimensional requirements of MIL-C-24308 and mate with all industry standard D sub miniature connectors.

Supplied in both tin and dimpled version as standard. Mouldings are thermoplastic, self extinguishing to UL 94 V0.

### Part Numbers for FDX Connectors

	FDX	25	P	Z	A	A	00
Series FDX	_____	_____	_____	_____	_____	_____	_____
Number of ways 9, 15, 25 or 37	_____	_____	_____	_____	_____	_____	_____
Gender			P = plug S = socket	_____	_____	_____	_____
Contact termination			Z = solder bucket Y = straight pcb YC = right angle pcb W = wire wrap	_____	_____	_____	_____
Filter type			A = planar B = individual tubular filters	_____	_____	_____	_____
Filter value			A = 330 pF B = 1000 pF (1.0 nF) C = 1500 pF (1.5 nF)	_____	_____	_____	_____
Customer variant			(-) = standard	_____	_____	_____	_____

For contact terminations and layouts please refer to Standard DX series on page 4.

### Technical data

Contact: \_\_\_\_\_ Turned copper alloy  
Plating: \_\_\_\_\_ Gold over nickel  
Shell: \_\_\_\_\_ Mild steel, tin plated  
Contact resistance: \_\_\_\_\_ 10 mohm max  
Current rating: \_\_\_\_\_ 5A  
Working voltage: \_\_\_\_\_ 100V dc  
Capacitor tolerance: \_\_\_\_\_ - 20/+80%  
Temperature rating: \_\_\_\_\_ - 55°C +85°C  
Mechanical endurance: \_\_\_\_\_ 500 operations



# HERMETIC D CONNECTORS


Series  
**D**

Hermetic connectors are used where it is necessary to transmit electrical signals through a panel which has a partial vacuum on one side, and standard atmospheric pressure on the other.


Hermetic connectors are only available with male contacts.

## Part Numbers for DH Connectors


	DH	15	Z	2	0	0
(*) DH series						
(Max leakage rate $10^6$ )						
DHA series						
(Max leakage rate $10^9$ )						
DHB series						
(Max leakage rate $10^3$ )						
No. of ways 9, 15, 25 or 37						
Z- solder contacts						
(*) 2- contacts with bucket						
3- contacts with hole						
0- gold plating 1, 27 u Au						
1- gold plating 0, 7 u Au						
2- gold plating 0, 2 u Au						
4- tin plated contacts						
(*) 5- nickelled contacts						
0- tin plated shell						
1- yellow bicromated shell						
(*) 2- nickel shell						



Rigid Mounting Connectors

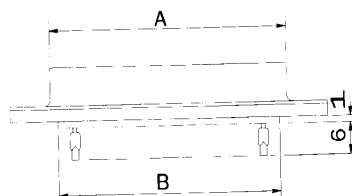

Rigid Mounting Connectors

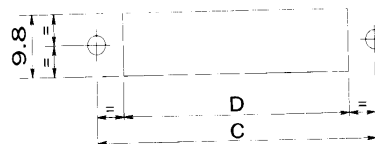

Panel Cut-Out

Number of contacts	A	B	C	D
9	17.8	18.4	2.5	18.9
15	26.1	23.8	33.3	24.3
25	40	37.5	4.7	38
37	55.5	54	63.5	54.5

# STACKED D CONNECTORS

A variant of the DN series, this series is designed to offer space reduction and reduced assembly costs.

Made to the same high quality and performance specification, this range also offers removable contacts, giving greater maintenance flexibility.


Available in 9, 15, 25 and 37 way variants.

Alternative heights/contact pitches can be considered.

## Part Number for SAC Connectors

	Upper Connector	Lower Connector
	SAC B N - 25 P 2	25 S 2
	Options are the same as for the upper connector	
Series	_____	_____
Type B	_____	_____
Insulator (N) Thermoplastic	_____	_____
Shell (-) Standard (T) Tin plated (D) Dimpled (tin plated)	_____	_____
Number of contacts 9, 15, 25, 37	_____	_____
Contact ref (P) Male (S) Female	_____	_____
Locking devices (2) Fixed jackpost TB 25 (M03) (3) Fixed screw (M04) (4) Fixed swaged with diam. 125 (3.2) hole (M05) (5) Fixed swaged with 4.40 NC thread (M06) (6) Fixed swaged with spacers (S-2)	_____	_____





## Dimensional Details

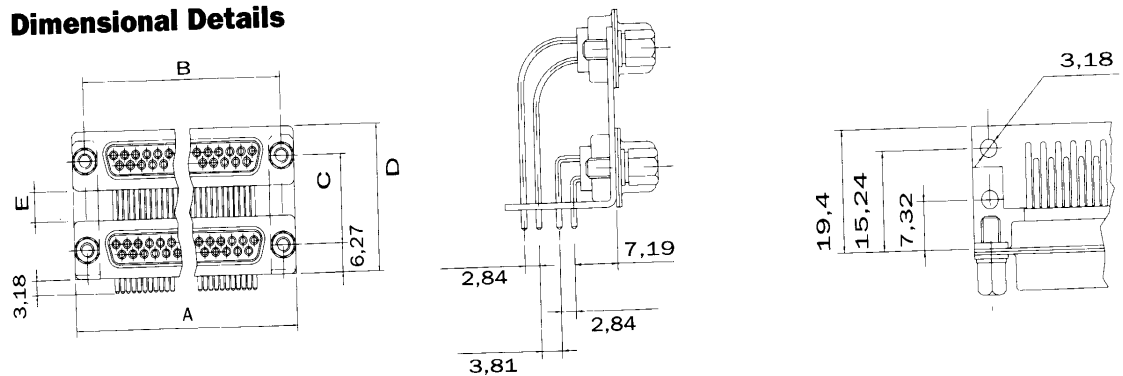

Ref	Connector type	No. contacts	A	B	C	D	E
SAC-B9	9	18	30.8	25	19	31.4	6.6
SAC-B15	15	30	39.15	33.3	19	31.4	6.6
SAC-B25	25	50	52.9	47	19	31.4	6.6
SAC-B37	37	74	69.4	63.5	19	31.4	6.6

## BOARD DRILLING DETAILS

Mount connector with mating face positioned to follow direction of arrow. Dimensions are shown in mm.

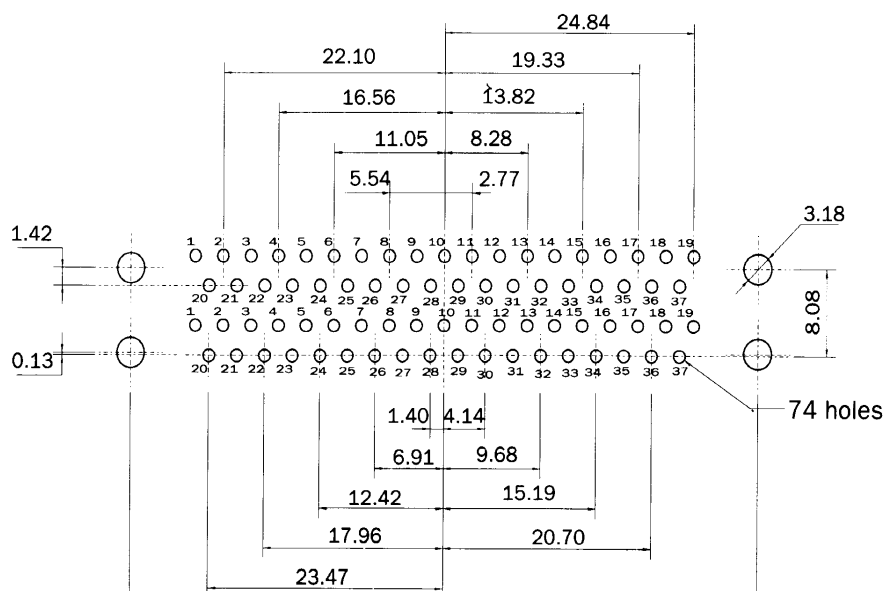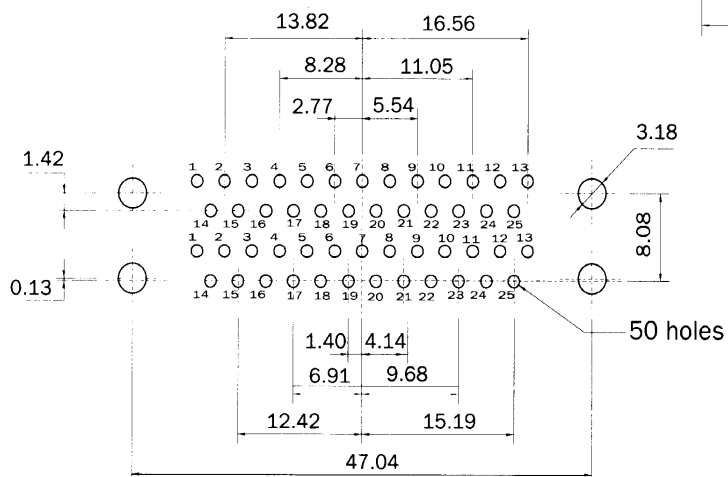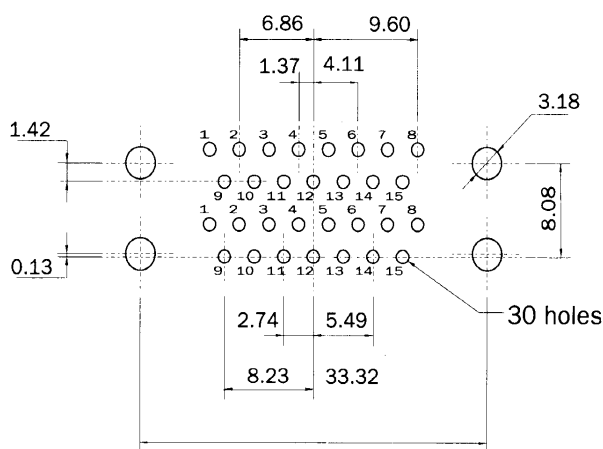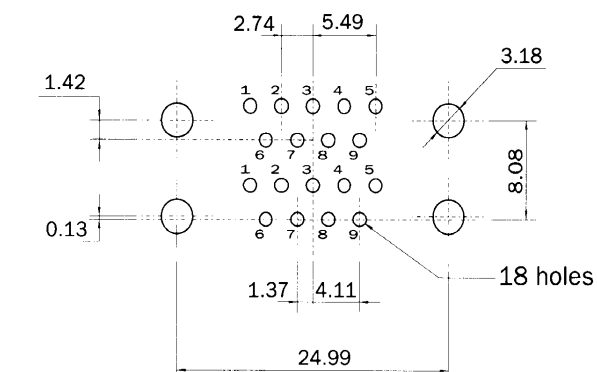

# HOODS



## Screwlock System

The industry standard screwlock system. CEEP hoods feature long shank screwlocks for finger or screwdriver operation. Available in both cable-to-panel and cable-to-cable configurations. Hoods can be fitted after the connector has been wired, avoiding time-consuming assembly errors and making it easier for inspection and maintenance.

4-40 UNC thread as standard, while the body is manufactured from tough ABS - UL 94 V0 rated.

## Part Number for CT Hoods

	CT	I	25	M
CT = Male screwlock				
PCT = Female screwlock				
(-) = External cable clamp				
I = Internal cable clamp (9, 15 + 25 way only)				
Shell size (9, 15, 25, 37 & 50 way)				
(-) = Plain				
M = Metallised (Metallised and internal cable clamp for EMI/RFI protection)				

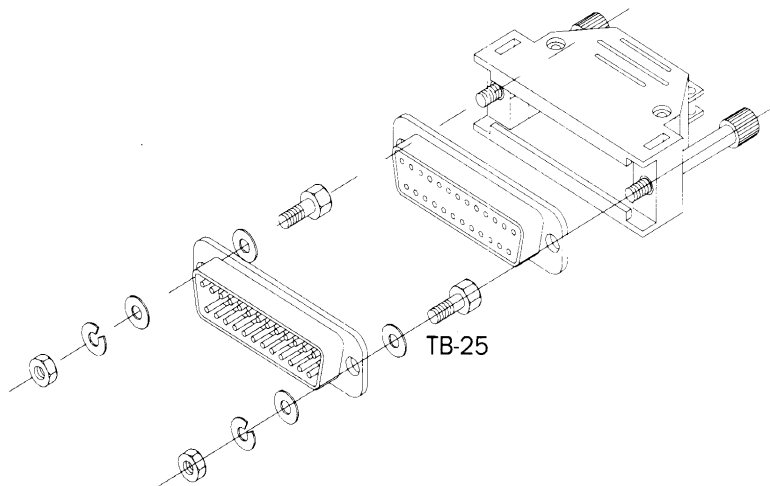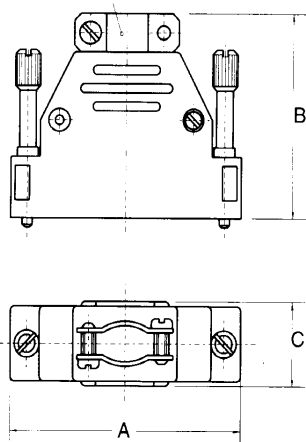

## Dimensions

Number of contacts	Designation		Dimensions				
	Male screwlock	*Female screwlock	A	B	C	Cable Ø	
						Max	Min
9	CT.09	PCT.09	31.5	30.5	18.2	6	4
15	CT.15	PCT.15	42.0	38.0	18.5	7	5
25	CT.25	PCT.25	55.5	44.0	18.2	8	6
**37	CT.37	PCT.37	72.0	46.0	18.2	7 x 16	5 x 16
**50	CT.50	PCT.50	62.0	46.0	21.5	10 x 16	5 x 16

\*\* For 37 and 50 way cable size based on rectangular cable.

\* PCT: Extension cable hood for Screwlock system.

## HOODS

### Slidelock System

The unique CEEP patented Slidelock system features a push-home-to-lock, push-button-to-release system. Secure mounting is assured by four point locking.

Available in cable-to-panel and cable-to-cable configurations. Hoods can be fitted after the connector has been wired, avoiding time consuming assembly errors and making it easier for inspection and maintenance.

The body is manufactured from tough ABS, self extinguishing to UL 94 V0.




### Part Number for CE Hoods

Series \_\_\_\_\_ CE 25 M

CE = with slidelock  
 C = without slidelock  
 CPE = with slidelock for ribbon cable (25 way only)  
 CP = as CPE - without slidelock

Shell size 9, 15, 25, 37 & 50 \_\_\_\_\_

(-) = Plain plastic \_\_\_\_\_  
 M = Metallised \_\_\_\_\_

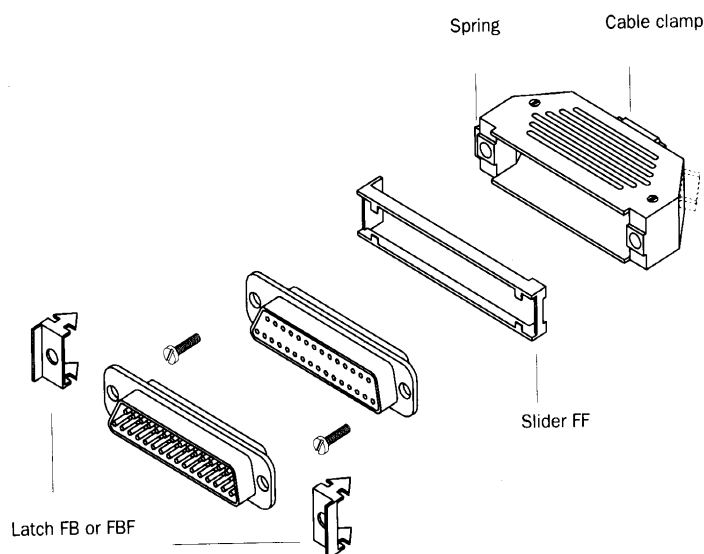

### Dimensions

Number of contacts	Hood part numbers		Dimensions							
	With locking system	Without locking system	Hoods				Cable entry			
			A	B	C	D	Round		Rectangular	
							max	min	max	min
*9	CE.09	C.09	37	15	34	43	6	4	-	-
*15	CE.15	C.15	45	15	40	53	7	5	-	-
*25	CE.25	C.25	60	15	44	68	8	6	-	-
*37	CE.37	C.37	77	15	52	84	-	-	7.16	5.16
*50	CE.50	C.50	74	18	52	81	-	-	10.16	5.16
**25	CPE.25	CP.25	60	15	36	-	-	-	-	-


PCE/PC: Extension cable hood for Slidelock system.

\*\* Type CPE for flat cable, with quick release slidelock.

# LOCKING DEVICES

## Latches for CE Hoods


Supplied in pairs. Material/finish = nickel plated steel.

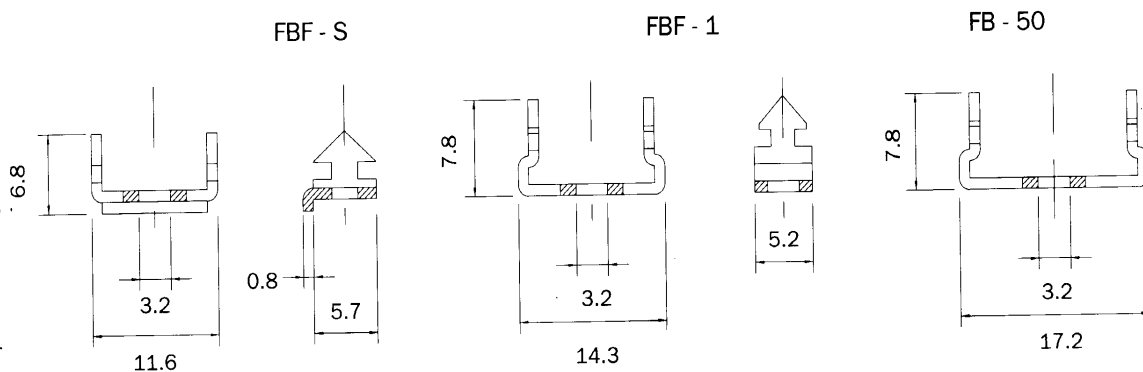


## Slidelock Assembly for Plain Hood CPS

An inexpensive slidelock assembly that can be fitted to most designs of plain hoods to convert them into an effective latching assembly when used in conjunction with the slidelock post type CD53.

Kit comprises one retaining plate, two screws, two washers and two nuts.

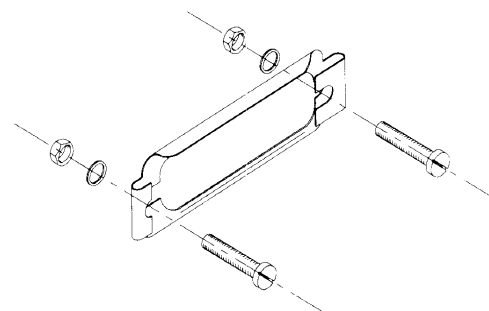

Shell size	Part Number	Dimensions		
		A	B	C
9	CDS 09	12.7	34.8	25.0
15	CDS 15	12.7	43.7	33.3
25	CDS 25	12.7	57.4	47.0
37	CDS 37	12.7	73.9	63.5
50	CDS 50	15.5	71.5	61.1

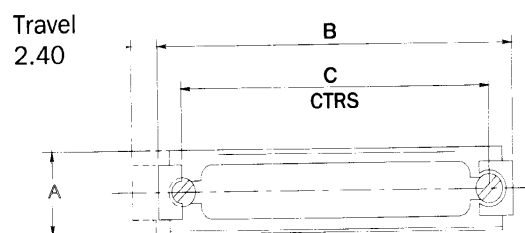

## Slidelock Post CD53


When used in conjunction with slidelock type CDS, provides an inexpensive method of converting a variety of plain hoods into effective latching devices.

Effective on all shell sizes.

Kit comprises two posts, two spring washers two plain washers and two nuts.

Part Number CD53-PR (Bagged Pairs)

CD53 (Bulk)

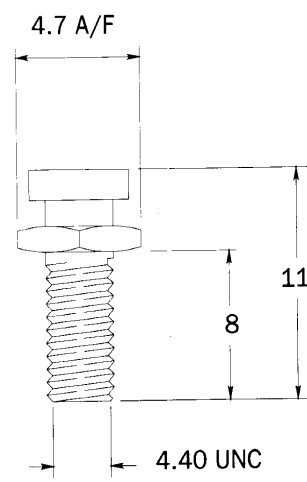

## MOUNTING SYSTEMS

In addition to the extensive range of D connections shown in this brochure, a variety of mounting hardware is available, either fitted to connectors, or supplied as discrete components. Connectors can be supplied fitted with mounting brackets, earthing tags, boardlocks, and threaded spacers. If you have a specific requirement, please discuss it with our Sales Office staff.

