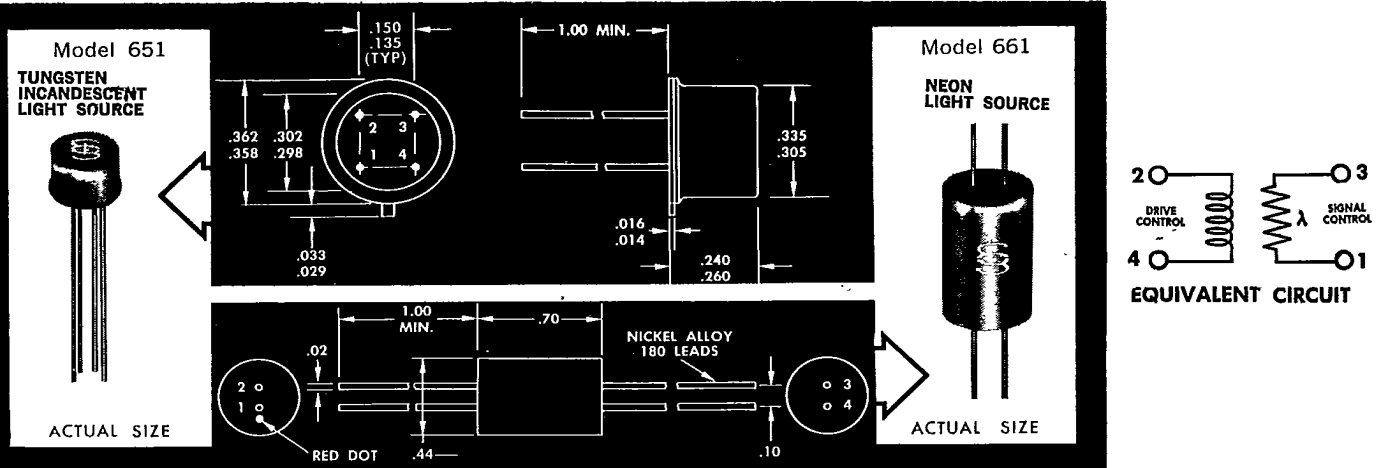


MODELS 651 & 661

SOLID STATE
ELECTRONICS
CORP.15321 RAYEN ST.
SEPULVEDA, CALIFORNIA**Solid State Raylay®**(*ISOLATED LIGHT-CONTROLLED RESISTOR)
-55°C TO +70°C**DESCRIPTION**

The Solid State Raylay is a four-terminal photo-electronic device which combines a light source and a photocell within an opaque enclosure. Energy transfer from the input to the output is by means of light radiation.

Varying the drive to the light source from zero to full excitation causes the photocell to decrease its resistance up to a factor of 10^6 .

A major advantage of the Raylay is its complete electrical and mechanical isolation of the drive circuit from the signal circuit. This enables application as a non-mechanical relay, chopper, electrically controlled potentiometer or rheostat. The Raylay may also be used as a DC to low frequency transformer or as an isolated low pass filter.

For many applications the Raylay can be utilized as a direct

replacement for a conventional mechanical relay. Advantages include exceptionally long life extended up to three $\times 10^4$ hours, reduced size and weight, higher resistance to shock and vibration, silent operation, increased speed of actuation, elimination of contact bounce, noise, wear, pitting and burning, decreased drive power and little or undetectable generation of radio frequency noise.

The Model 651 utilizes an incandescent light source whereas the Model 661 uses a gas discharge light source for excitation. The Model 651 has a lower "on" resistance than the 661 and may be actuated by relatively low voltages. Actuation of the Model 661 is faster than the 651.

The Raylay is highly immune to the effects of shock and vibration and is recommended for industrial, military, missile, space vehicle and portable applications.

CHARACTERISTICS AT 25°C.

FEATURES
SUBMINIATURE
NONMECHANICAL
LONG LIFE
ARCLESS
RF LESS
RELIABLE
WIDE RANGE
SILENT
CHATTERPROOF
NONCORROSIVE
SHOCKPROOF
NONSTICKING
LOW NOISE
ISOLATED DRIVE



	PARAMETER	UNITS	MODEL 651	MODEL 661
DRIVE	NOMINAL CONTROL VOLTAGE	Volts DC or Peak	2	135
	NOMINAL CONTROL CURRENT	Milliamperes	24	2
	NOMINAL LIFE	Hours	10^5	3×10^6
	CONTROL VOLTAGE RANGE	Volts DC or Peak	0 to 3	—
	CONTROL CURRENT RANGE	Milliamperes	0 to 30	1 to 3
	NOMINAL CONTROL RESISTANCE	Kilohms	—	20
SIGNAL	CONTROL RESISTANCE RANGE	Kilohms	—	0 to 135
	NOMINAL "ON" RESISTANCE	Ohms	700	1500
	MAXIMUM "ON" RESISTANCE	Ohms	1000	2500
	NOMINAL "OFF" RESISTANCE	Megohms	500	500
	MINIMUM "OFF" RESISTANCE	Megohms	10	10
	MAXIMUM SIGNAL VOLTAGE	Volts	125	125
	MAXIMUM POWER DISSIPATION (Derate 3mw/°C.)	Milliwatts	250	250
	NOMINAL SHUNT AND COUPLING CAPACITY	pf	1	1
	NOMINAL "SWITCH-ON" TIME ($V_s=20V$; $R_L=50K$)	milliseconds	20	1
	NOMINAL "SWITCH-OFF" TIME ($V_s=20V$; $R_L=50K$)	milliseconds	30	7

"ON" RESISTANCE VS CONTROL VOLTAGE

CONTROL CURRENT CHARACTERISTICS

SOLID STATE ELECTRONICS 76A D


8366132 0000898 8

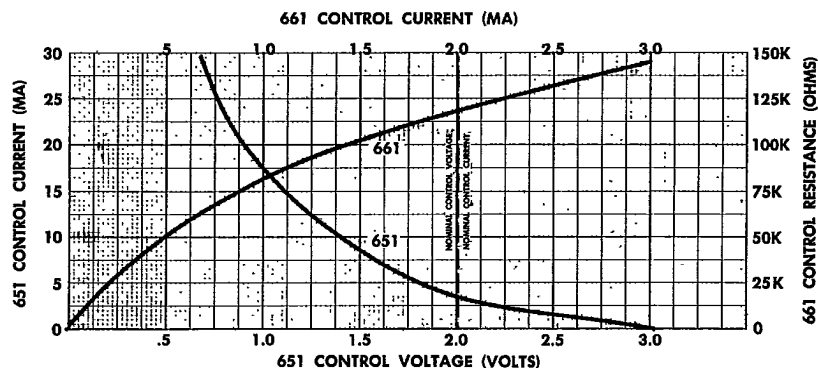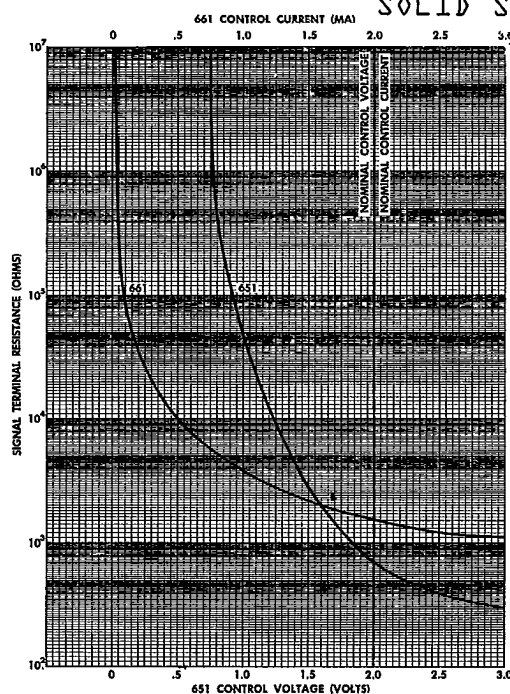


"SWITCH-ON" TIME VS LOAD RESISTANCE

MODEL 651


MODEL 661

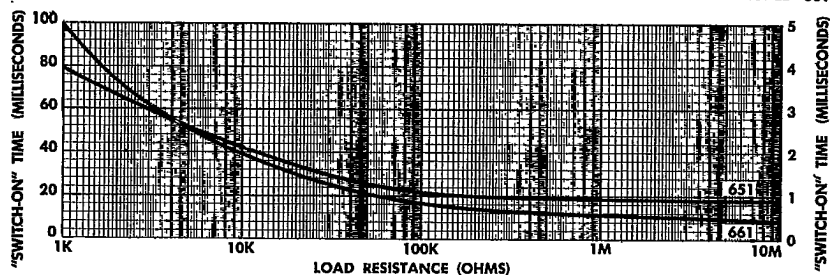


"ON" RESISTANCE VS TEMPERATURE

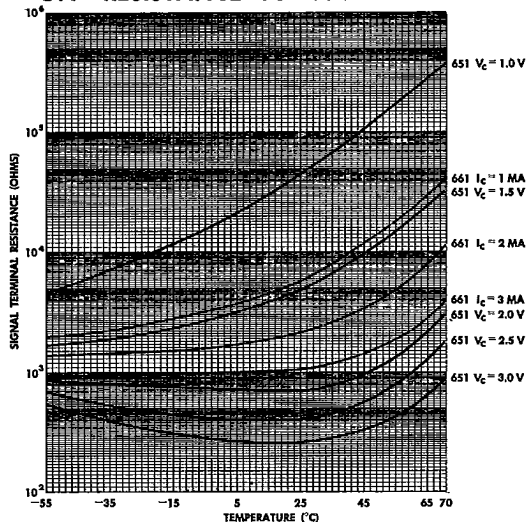

"SWITCH-OFF" TIME VS LOAD RESISTANCE

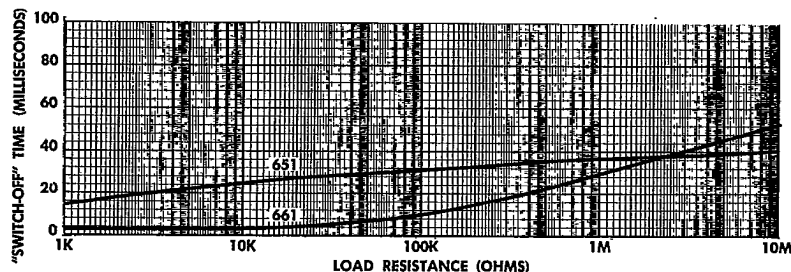

APPLICATIONS

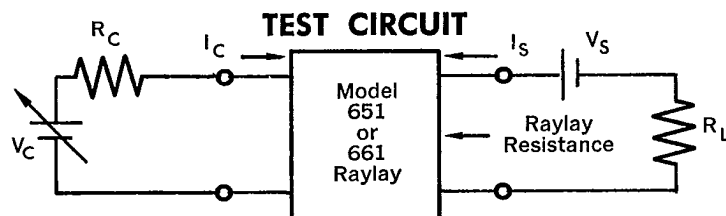

- | | |
|----------------------------|-------------------------------|
| Relay | Logic Circuits |
| Isolated Switch | Power Supply Regulation |
| Commutator Switch | Automatic Gain Control |
| Chopper | Automatic Frequency Control |
| Isolated Bias Control | DC to Low Frequency Isolation |
| High Voltage Isolation | Low Frequency Modulator |
| Isolated Variable Resistor | Low Pass Filter |
| Low Noise Control | Microwave Bolometer |

SOLID STATE ELECTRONICS CORPORATION

15321 Rayen Street • Sepulveda • California 91343

15321 RAYEN STREET, SEPULVEDA, CALIFORNIA 91343

(213) 894-2271 - (213) 785-4473

TELEPHONE: AREA CODE (213) 894-2271 OR 785-4473



0632

C-11