
SECTION 9 KRONE RJK MODULAR JACKS

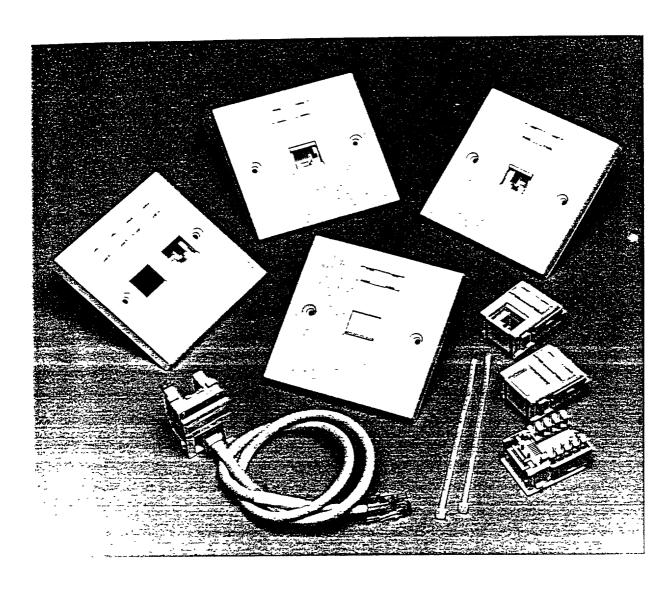

- Combines the industry standard KRONE IDC with the popular RJ jack
- A range of modular jack products for data and voice
- Excellent crosstalk performance at high data rates
- Accepts two identical wires per IDC, 0.4 to 0.65mm stranded or solid
- Suitable for bus type applications (ISDN)
- Excellent reliability
- Guaranteed for at least 1000 insertions when used with plugs conforming to standards FCC 68.5, ISO 8877(1987) and CENELEC ENV 41001
- RJ45 contacts 1.5µm gold plated over 1µm nickel
- 4 or 6 wire (RJ11), 6 wire (DEC MMJ) and 8 wire (RJ45) applications
- Available as single or double wall outlets or as mounting adaptor module
- Black or white shutters
- Mounting adaptor module particularly suitable for use in trunking and under floor applications (Mounting adaptor cut-out 24.1mm x 16.1mm, template supplied)
- Conform to Oftel General Approval NS/G/23/L/100005

PLEASE NOTE: All RJ jacks require plugs to be correctly terminated.

KRONE

9 KRONE RJK MODULAR JACKS

Combining the benefits of industry standard KRONE IDC with popular socket lead frames

DESCRIPTION	ILLUSTRATION	KRONE NO
Single Wall Outlet Spring loaded shutter Incorporates KRONE LSA-PLUS® IDC technique Excellent reliability Installer friendly Durable reusable labelling Wires terminated using industry standard KRONE tool No flying leads	310 210 210 210 210 210 210 210 210 210 2	
White or Black Shutter • 8 wire (RJ45) keyed White shutter Black shutter		6536/1/201/00 - Z4-0 - 060 6536/1/211/00 Pack Qty
• 8 wire (RJ45) unkeyed		
White shutter		6536/1/101/00
Black shutter		6536/1/111/00 Pack Oty 10
White shutter only ● 6 wire (RJ11)		6536/1/301/00
		Pack Oty 10
• 6 wire (DEC MMJ)		6536/1/401/00
		Pack Oty 10

9 KRONE RJK MODULAR JACKS

Combining the benefits of industry standard KRONE IDC with the popular RJ Jack

DESCRIPTION	ILLUSTRATION	KRONE NO
Double Wall Outlet • Spring loaded shutter • Incorporates KRONE LSA-PLUS® IDC technique • Excellent reliability • Installer friendly • Durable reusable labelling • Wires terminated using industry standard KRONE tool • No flying leads	36.0 S5.0 S5.0 S5.0 S5.0 S5.0 S5.0 S5.0 S5	
White or Black Shutters • 8 wire (RJ45) keyed White shutter Black shutter		240 - 072 6536/1/202/00 6536/1/212/00 Pack Qty
8 wire (RJ45) unkeyed White shutter Black shutter		6536/1/102/00 6536/1/112/00 Pack Oty
White shutter only • 6 wire (RJ11)		6536/1/302/00 Pack Qty
• 6 wire (DEC MMJ)		6536/1/402/00 Pack Oty

KRONE

9 KRONE RJK MODULAR JACKS
Combining the benefits of industry standard KRONE IDC with the popular RJ Jack

DESCRIPTION	ILLUSTRATION	KRONE NO
Mounting Adaptor Module Spring loaded shutter Incorporates KRONE LSA-PLUS® IDC technique Durable reusable labelling Wires terminated using industry standard KRONE tool No flying leads Particularly suitable for underfloor applications	1-2 mm panel inchress 1-2 mm panel inchress 20.2	
8 wire (RJ45) keyed White shutter Black shutter		240-084 6536/1/200/00 6536/1/210/00 Pack Qty
8 wire (RJ45) unkeyed White shutter Black shutter		6536/1/100/00 6536/1/110/00 Pack Qty
White shutter only ● 6 wire (RJ11)	6 J 1 A	6536/1/300/00 Pack Oty
• 6 wire (DEC MMJ)		6536/1/400/00 Pack Oty 10