



Eveready Battery Company, Inc.

533 Maryville University Drive
St. Louis, MO 63141
Telephone 1-800-383-7323
Internet: www.energizer.com


Engineering Data

D

Alkaline 1.5V

No Added Mercury or Cadmium

ENERGIZER NO. X95

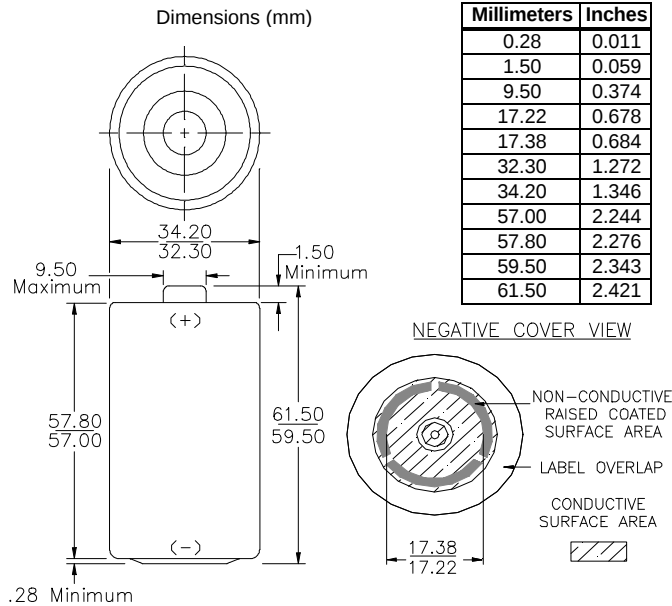

Chemical System: Zinc-Manganese Dioxide (Zn/MnO₂)

Designation: ANSI-13A, IEC-LR20

Battery Voltage: 1.5 Volts

Average Weight: 141.9 grams (5.0 oz.)

Volume: 55.9 cubic centimeters (3.4 cubic inch)


Average Service capacity (to 0.8 Volts / cell): 18000 mAh
(Rated Capacity at 25 mA continuous drain)

Cell: One No. X3-350 (size "D")


Jacket: Plastic Label

Shelf Life: 7 years


Temperature Effects Typical Service to 0.8 Volts


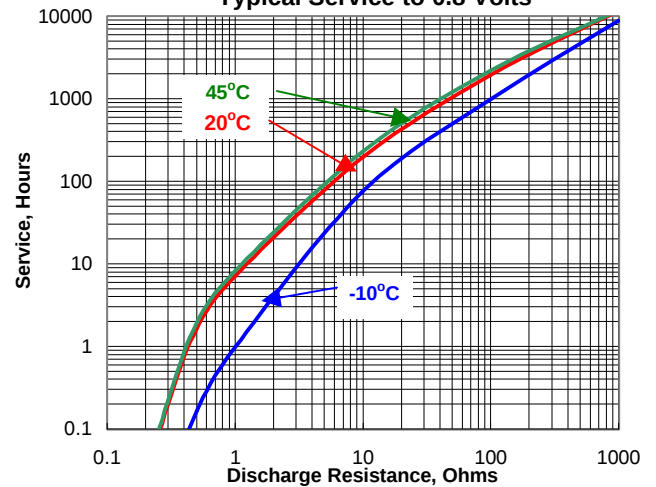


Constant Resistance Discharge Typical Service




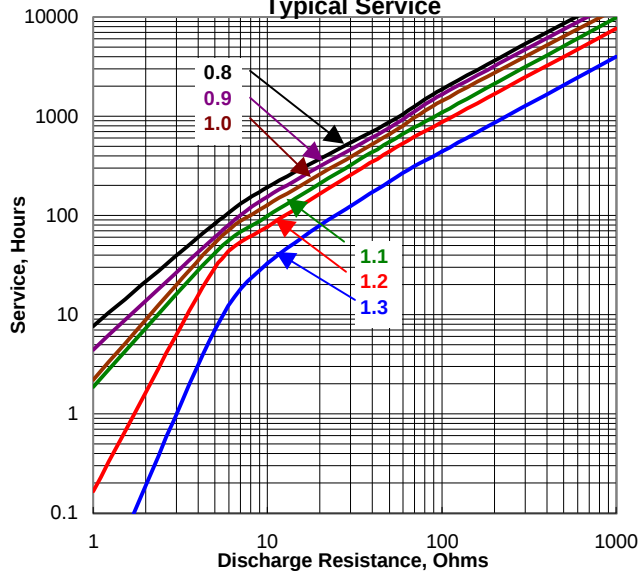


Constant Current Discharge Typical Service

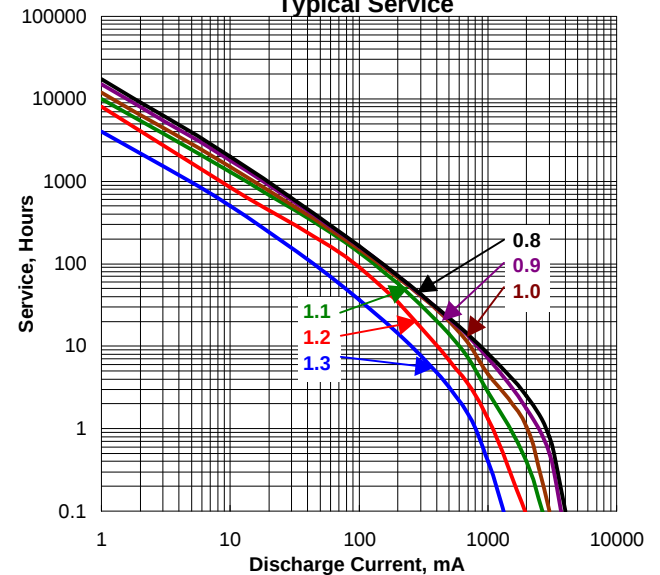

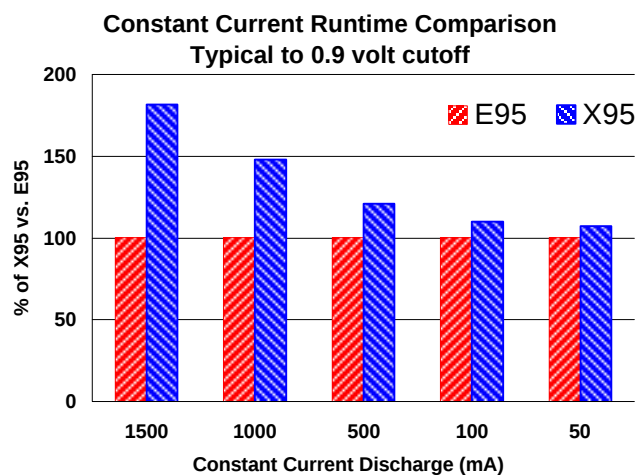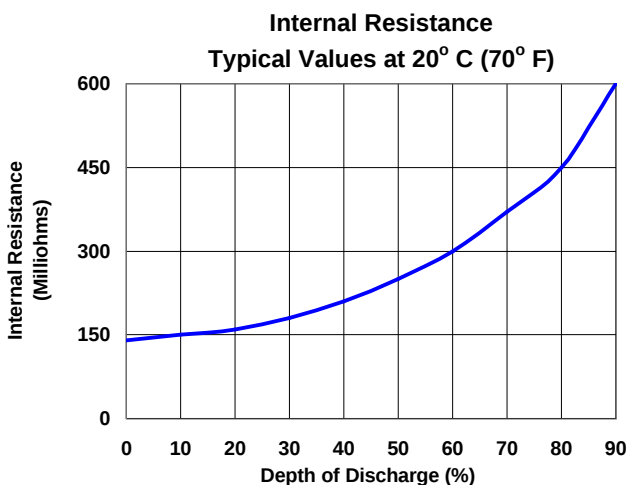

Typical Applications

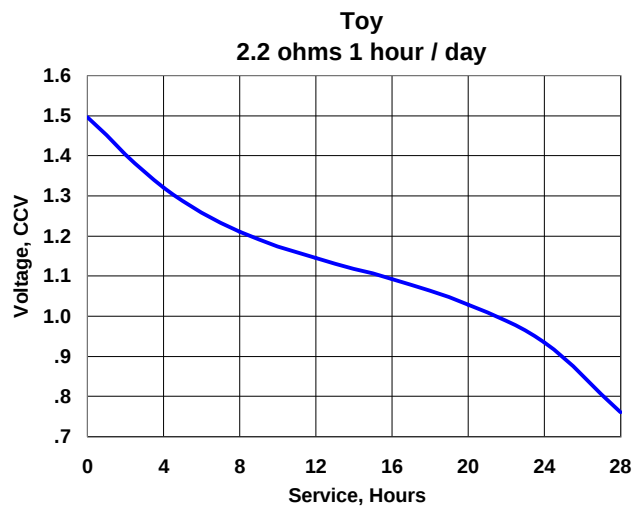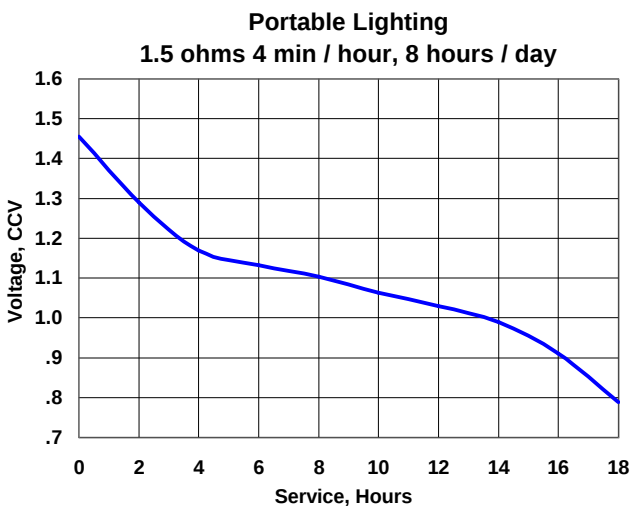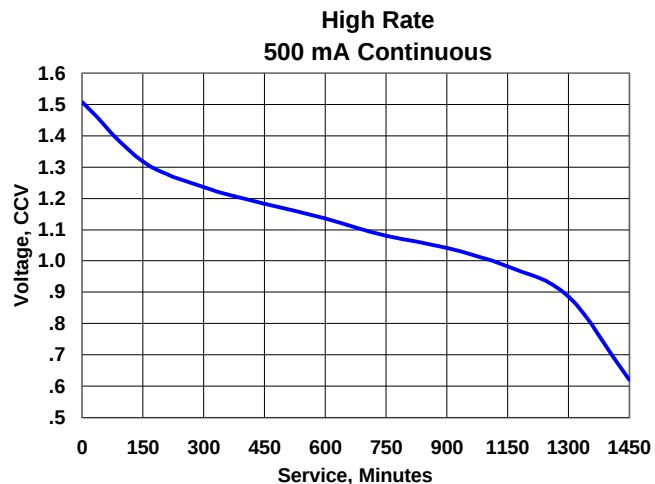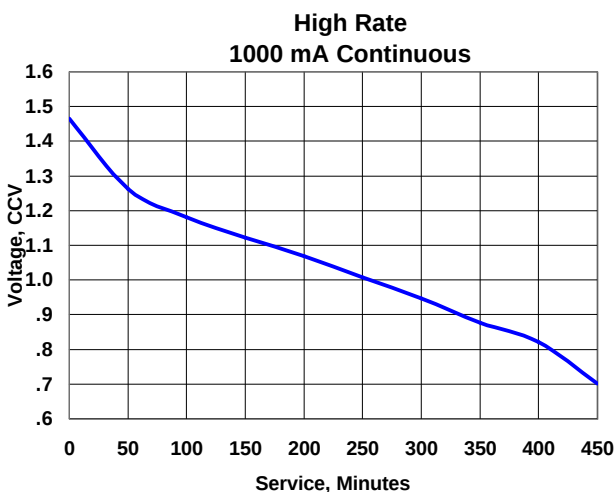

Important Notice

This data sheet contains information specific to batteries manufactured at time of its publication. Please contact your Energizer representative for most current information. Contents herein do not constitute a warranty.