



Eveready Battery Company, Inc.

533 Maryville University Drive
St. Louis, MO 63141
Telephone 1-800-383-7323
Internet: www.energizer.com

Engineering Data


C

Alkaline 1.5V

No Added Mercury or Cadmium

ENERGIZER NO. X93

Dimensions (mm)

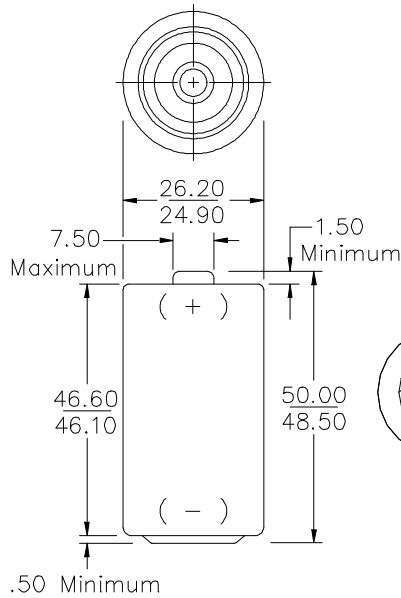

Millimeters	Inches
0.50	0.020
1.50	0.059
7.50	0.295
12.32	0.485
12.48	0.491
24.90	0.980
26.20	1.031
46.10	1.815
46.60	1.835
48.50	1.909
50.00	1.969

Chemical System: Zinc-Manganese Dioxide (Zn/MnO₂)

Designation: ANSI-14A, IEC-LR14

Battery Voltage: 1.5 Volts

Average Weight: 66.2 grams (2.3 oz.)

Volume: 26.9 cubic centimeters (1.6 cubic inch)


Average Service capacity (to 0.8 Volts / cell): 8350 mAh
(Rated Capacity at 25 mA continuous drain)

Cell: One No. X3-335 (size "C")


Jacket: Plastic Label

Shelf Life: 7 years


Temperature Effects Typical Service to 0.8 Volts


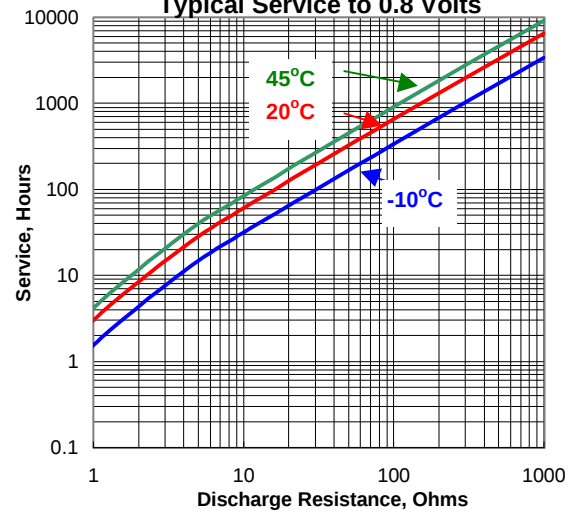


Constant Resistance Discharge Typical Service




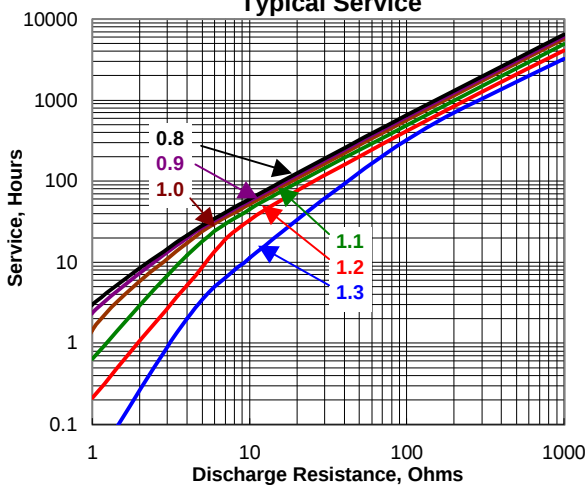


Constant Current Discharge Typical Service

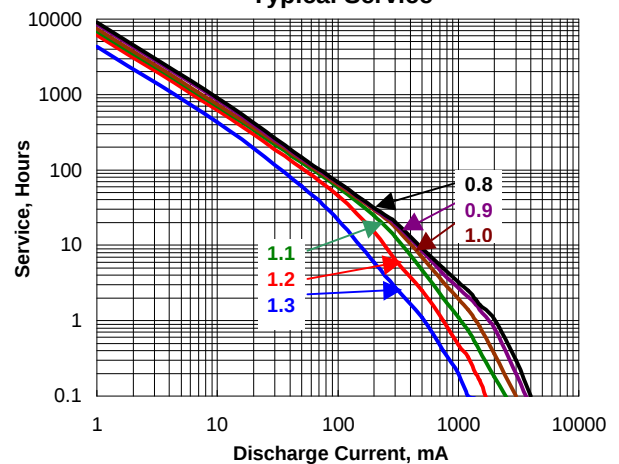

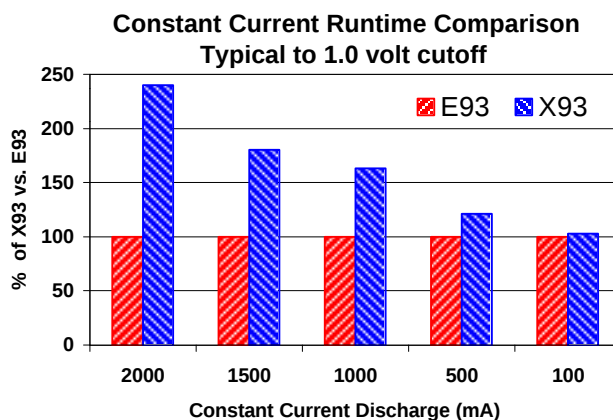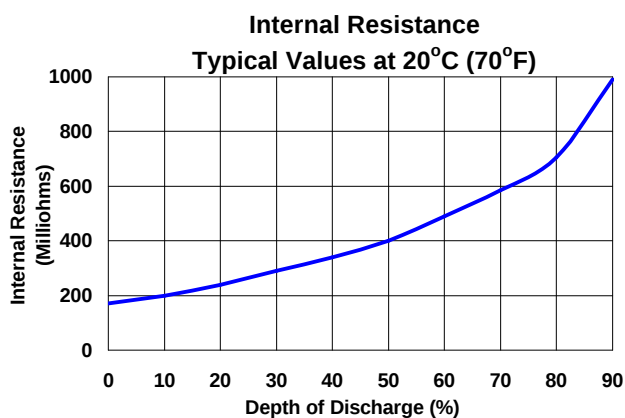

Typical Applications

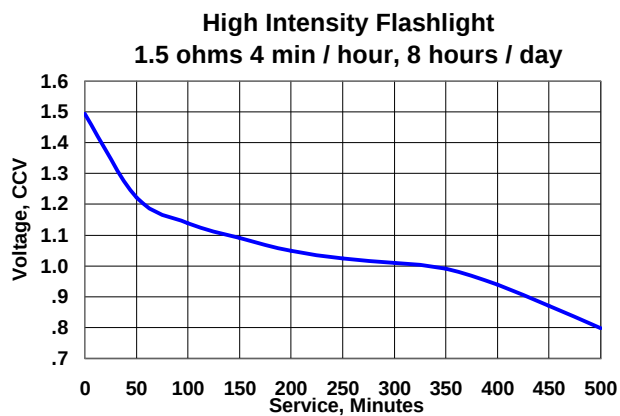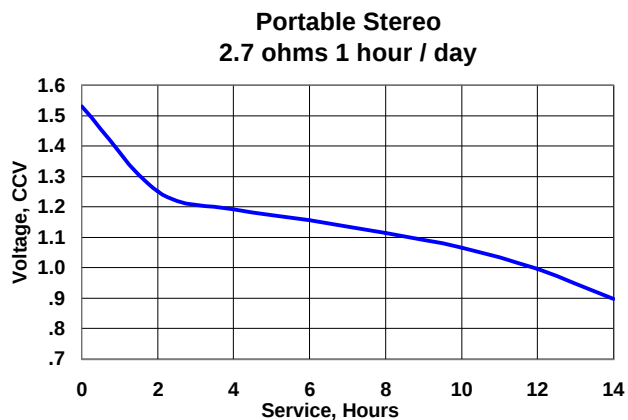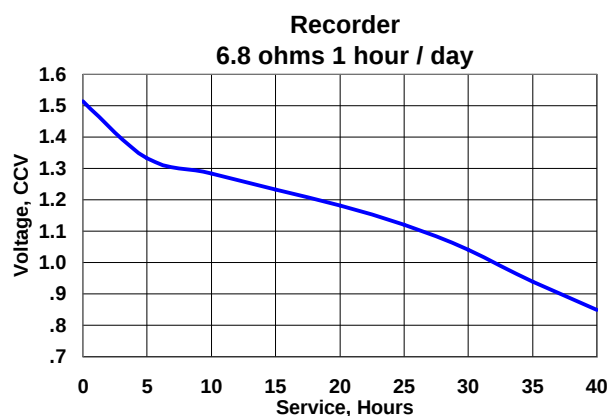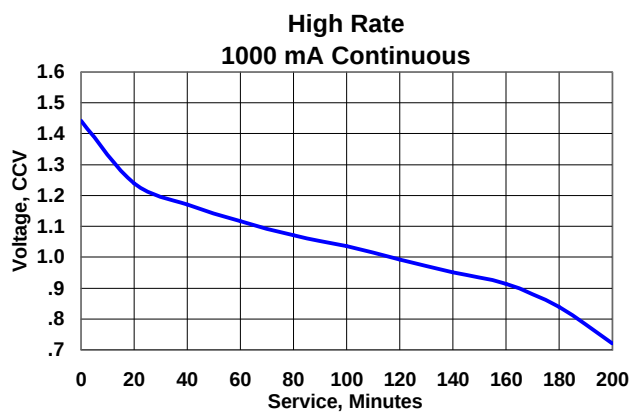

Important Notice

This data sheet contains information specific to batteries manufactured at time of its publication. Please contact your Energizer representative for most current information. Contents herein do not constitute a warranty.