

Cable junction boxes

For joining mobile cables, internal, and external use under water.

Can be used both for AC/DC-voltage. IP 67.



Type	Poles	Union sleeves	Max. V	Dimens.		Cablediam.	
				D	L	min	max
SK-2-2500	2	PG-11	250	24	100	5	12.5
SK-3-2500	3	PG-16	400	28	120	6	15.0
SK-5-2500	5	PG-21	400	35	150	10	19.0

Material: Nylon 6.6, temperature range: -20°/+60°C.

Colours: Black, also available in grey.




Cable clamps

With reversible clamp, allows large variation in cable diameter.




Type	A	B	C	D	E min.	F
PG-9	15.2	23.0	8.0	11.0	3.2	19
PG-11	18.6	25.0	9.0	13.0	3.5	21
PG-13.5	20.4	27.5	10.0	14.5	3.7	23
PG-16	22.5	29.0	10.0	16.5	4.0	25
PG-21	28.3	37.0	13.5	22.0	5.5	32
PG-29	37.0	47.0	17.0	29.5	7.5	42

Material: Nylon 6.6, temperature range: -20°/+100°C.

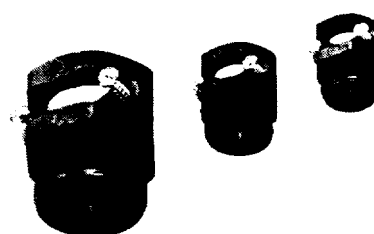

Lock nuts

Type	Dimensions in mm		
	M	N	O
PVC in nylon-nuts:			
J-KGM-9	19	4.5	17.3
J-KGM-11	22	5.0	25.4
J-KGM-13.5	24	5.5	27.7
J-KGM-16	27	6.0	31.1
J-KGM-21	32	6.5	36.9
J-KGM-29	41	7.5	47.3
Brassnuts:			
J-MGM-9		2.8	18.0
J-MGM-11		3.0	21.0
J-MGM-13,5		3.0	23.0
J-MGM-16		3.0	26.0
J-MGM-21		3.5	32.0
J-MGM-21		4.0	41.0

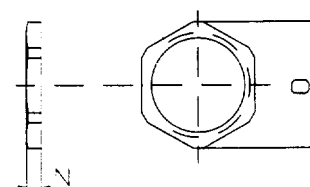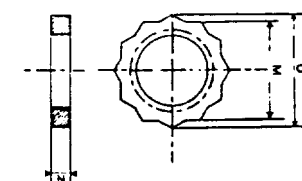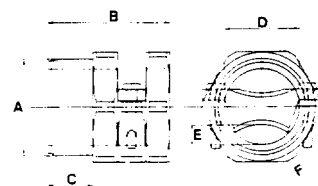

The technical data are subject to alteration.

OJ ELEKTRONIK A/S

STENAGER 13B · DK-6400 SØNDERBORG · TLF. 74 42 10 10 · FAX 74 42 10 51

