




defining a degree of excellence

5VTD0199

Type 5VT / 5VTP

5 x 20mm Glass Tube

Time-lag Fuse Series (High Surge-proof, Low - breaking Capacity)

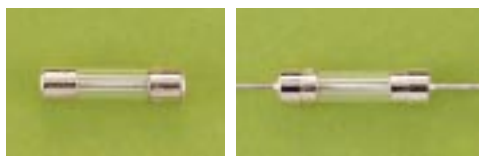

Electrical Characteristics (IEC-127-2 STANDARD SHEET 3)

Rated Current	1.5 In		2.1 In		2.75 In		4 In		10 In	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
1A to 6.3A	1	2	600	10	150	3	20	300		
	hr.	min.	ms	sec	ms	sec	ms	ms		

Approvals



Safety Agency Approvals	Amp range / Volt @ I.R. ability
Certificate No. 9710060 License No. 102815 Recognized File No. E20624 Acceptance File No. LR39772	1A - 6.3A / 250V AC@ 35A or 10 In whichever is greater

Operating Temperature

-55°C to +125°C

Physical Specification

Materials

Glass body / Nickel Plated Brass Caps

Lead wire :

Tin-lead plated Copper,

Diameter 0.032", 6.3A and less

Marking

On fuse

"bel", "T", "Current Rating", "L", "250V" &
"Appropriate Safety Logos"

On label:

Above info, "5VT" or "5VTP", Interrupting Rating
plus "CE"

Catalog Number	Ampere Rating	Typical Cold Resistance (ohm)	Volt-drop @100% In (Volt) max.	Melting I ² T < 10 mSec (A ² Sec)	Melting I ² T @10 In (A ² Sec)	Maximum Power Dissipation (W)
5VT (P) 1	1A	0.11	0.13	28	29	0.42
5VT (P) 1.25	1.25A	0.08	0.12	42	43	0.42
5VT (P) 1.6	1.6A	0.06	0.12	62	64	0.51
5VT (P) 2	2A	0.04	0.11	92	95	0.61
5VT (P) 2.5	2.5A	0.03	0.11	137	142	0.74
5VT (P) 3.15	3.15A	0.023	0.10	203	211	0.90
5VT (P) 4	4A	0.017	0.10	300	313	1.08
5VT (P) 5	5A	0.012	0.10	444	465	1.31
5VT (P) 6.3	6.3A	0.009	0.09	658	691	1.58

Consult manufacturer for other ratings

Packaging

1. In bulk :

5VT - 1,000 pcs per box; **5VTP** - 500 pcs per box

2. On Axial Tape & Reel:


1,500 pcs per reel

3. Tape & Reel specification:

per EIA-296-E & IEC 286-1

@ 10mm Pitch and 63.5mm inside Tape Spacing

Mechanical Dimensions

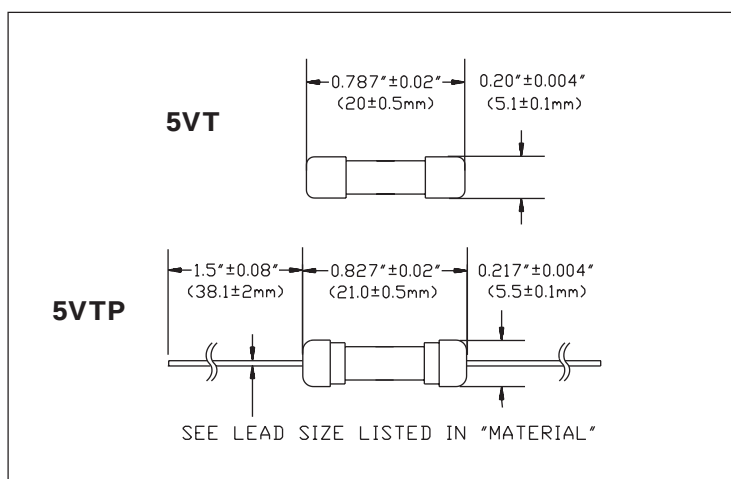

Specifications subject to change without notice


Type 5VT / 5VTP

5 x 20mm Glass Tube

Time-lag Fuse Series (High Surge-proof, Low-breaking Capacity)

5VTC0600

5VT / 5VTP - TIME CURRENT CHARACTERISTIC CURVE

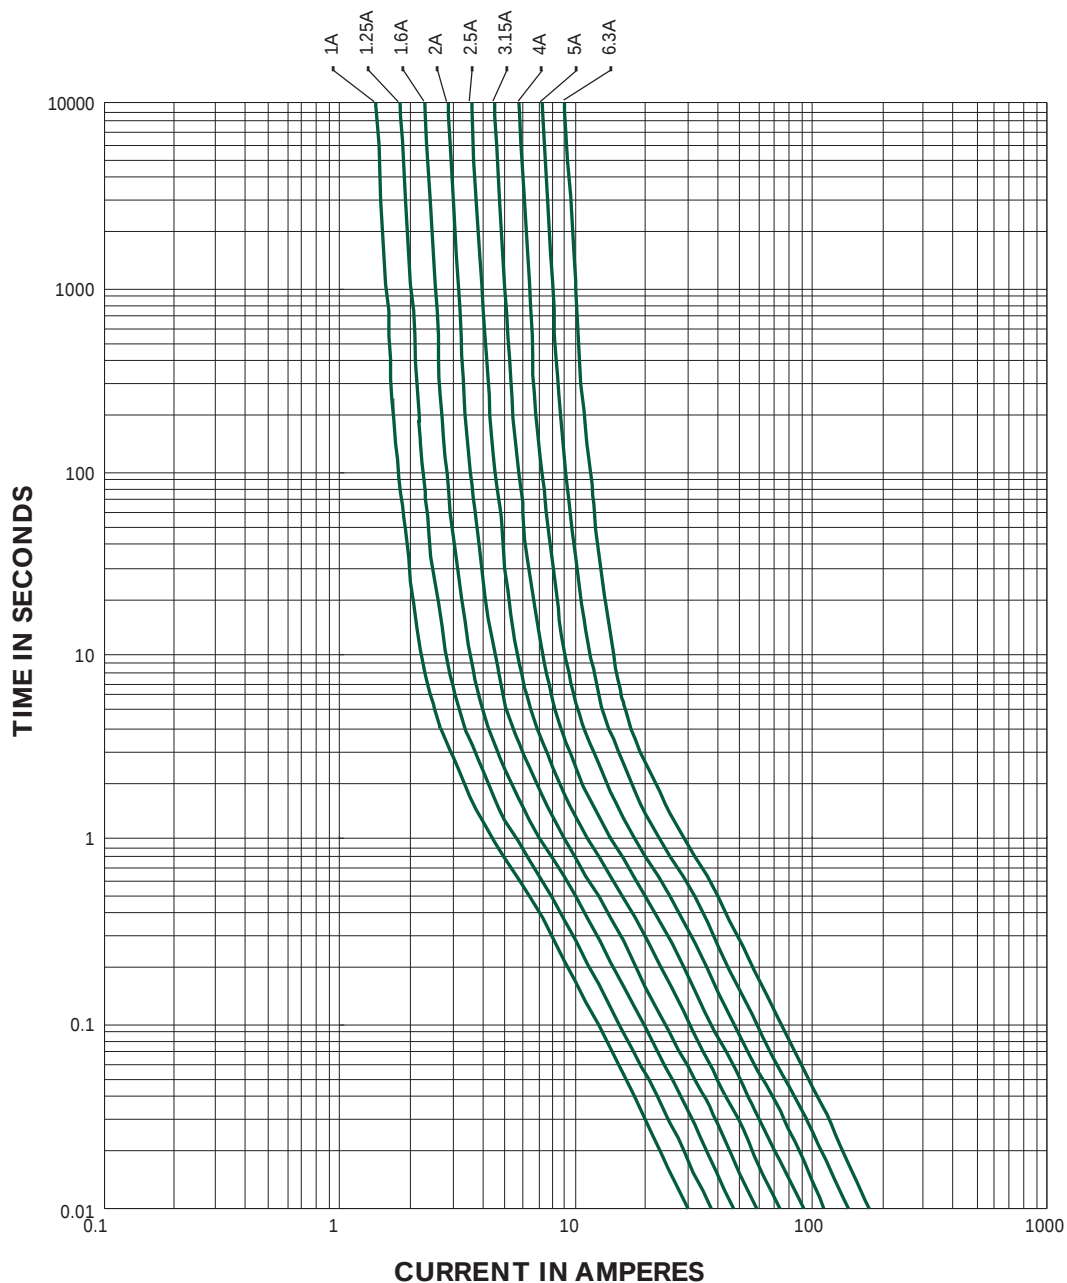

Specifications subject to change without notice

NOTE - see important information under "User Guide" on P.08

Specifications subject to change without notice

Corporate Office

Bel Fuse Inc.
198 Van Vorst Street, Jersey City, NJ 07302
Tel: 201-432-0463
FaxFax: 201-432-9542
E-Mail: belfuse@belfuse.com
Internet: <http://www.belfuse.com>

Far East Office

Bel Fuse Ltd.
8F/8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel: 852-2328-5515
Fax: 852-2352-3706

European Office

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Preston PR1 8U
Lancashire, U.K.
Tel: 44-1772-556601
Fax: 44-1772-888366