

REVISIONS																			
LTR	DESCRIPTION	DATE (YR-MO-DA)	APPROVED																
A	Add vendor CAGE 69210. Add case outline U. Editorial changes throughout.	90-09-24	W. J. Johnson																
B	Add case outline N. Editorial changes throughout.	96-01-16	M. A. Frye																
C	Changes in accordance with NOR 5962-R104-96.	96-04-29	M. A. Frye																
D	Update dimensions A, E, S, and S1 for case outline N. Update boilerplate. Redrawn. -rrp	98-03-04	R. Monnin																
<p>THE ORIGINAL FIRST SHEET OF THIS DRAWING HAS BEEN REPLACED</p>																			

REV																				
SHEET																				
REV																				
SHEET																				
REV STATUS OF SHEETS	REV	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	D	
	SHEET	1	2	3	4	5	6	7	8	9	10	11								

PMIC N/A  <div style="text-align: center;"> <b>STANDARD MICROCIRCUIT DRAWING</b> </div> <p style="text-align: center;">THIS DRAWING IS AVAILABLE FOR USE BY ALL DEPARTMENTS  AND AGENCIES OF THE DEPARTMENT OF DEFENSE</p> <p style="text-align: center;">AMSC N/A</p>	PREPARED BY Charles E. Besore  CHECKED BY D. H. Johnson  APPROVED BY Michael A. Frye  DRAWING APPROVAL DATE 88-11-23  REVISION LEVEL D	<b>DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216</b>  MICROCIRCUIT, LINEAR, ADJUSTABLE, POSITIVE, LOW DROPOUT, VOLTAGE REGULATOR, MONOLITHIC SILICON  <table style="width: 100%; border: none;"> <tr> <td style="width: 15%; border: none;">SIZE A</td> <td style="width: 25%; border: none;">CAGE CODE <b>67268</b></td> <td style="width: 60%; border: none;"><b>5962-88646</b></td> </tr> </table>	SIZE A	CAGE CODE <b>67268</b>	<b>5962-88646</b>
SIZE A	CAGE CODE <b>67268</b>	<b>5962-88646</b>			
		SHEET <span style="margin-left: 20px;">1 OF 11</span>			

DSCC FORM 2233

APR 97

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


5962-E200-98

 9004708 0034504 025

## 1. SCOPE

1.1 Scope. This drawing describes device requirements for MIL-STD-883 compliant, non-JAN class level B microcircuits in accordance with MIL-PRF-38535, appendix A.

1.2 Part or Identifying Number (PIN). The complete PIN is as shown in the following example:

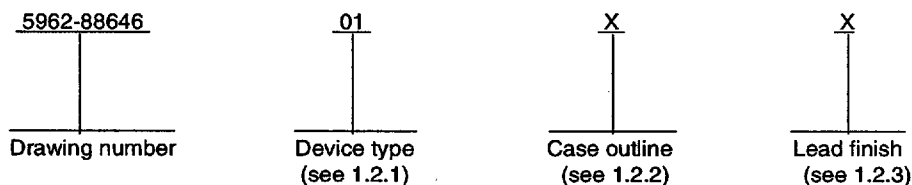

1.2.1 Device type(s). The device type(s) identify the circuit function as follows:

Device type	Generic number	Circuit function
01	See 6.6	3.0 A positive regulator, adjustable

1.2.2 Case outline(s). The case outline(s) are as designated in MIL-STD-1835 and as follows:

Outline letter	Descriptive designator	Terminals	Package style
X	MBFM1-P2	2	TO-3 can
U	See figure 1	3	TO-257 flange mount, with isolated tab,
N	See figure 1	3	Surface mount

1.2.3 Lead finish. The lead finish is as specified in MIL-PRF-38535, appendix A.

## 1.3 Absolute maximum ratings.

Input to output voltage differential .....	35 V dc
Storage temperature range .....	-65°C to +150°C
Lead temperature (soldering, 10 seconds).....	+300°C
Junction temperature (T <sub>J</sub> ).....	+150°C
Power dissipation (P <sub>D</sub> ) .....	Internally limited
Thermal resistance:	
Junction-to-case (θ <sub>JC</sub> ):	
Case X .....	3.0°C/W
Case U .....	3.5°C/W
Case N .....	6°C/W
Junction-to-ambient (θ <sub>JA</sub> ):	
Case X .....	35°C/W
Case U .....	42°C/W
Case N .....	3.5°C/W

<b>STANDARD MICROCIRCUIT DRAWING</b> DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE <b>A</b>		5962-88646
		REVISION LEVEL <b>D</b>	SHEET <b>2</b>

#### 1.4 Recommended operating conditions.

Ambient operating temperature range (T<sub>A</sub>)..... -55°C to +125°C  
Output current (I<sub>OUT</sub>)..... 2.0 A  
Input to output voltage differential ..... 25 V dc

#### 2. APPLICABLE DOCUMENTS

2.1 Government specification, standards, and handbooks. The following specification, standards, and handbooks form a part of this drawing to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation.

##### SPECIFICATION

###### DEPARTMENT OF DEFENSE

MIL-PRF-38535 - Integrated Circuits, Manufacturing, General Specification for.

##### STANDARDS

###### DEPARTMENT OF DEFENSE

MIL-STD-883 - Test Method Standard Microcircuits.  
MIL-STD-973 - Configuration Management.  
MIL-STD-1835 - Interface Standard For Microcircuit Case Outlines.

##### HANDBOOKS

###### DEPARTMENT OF DEFENSE

MIL-HDBK-103 - List of Standard Microcircuit Drawings (SMD's).  
MIL-HDBK-780 - Standard Microcircuit Drawings.

(Unless otherwise indicated, copies of the specification, standards, and handbooks are available from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.2 Order of precedence. In the event of a conflict between the text of this drawing and the references cited herein, the text of this drawing takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

#### 3. REQUIREMENTS

3.1 Item requirements. The individual item requirements shall be in accordance with MIL-PRF-38535, appendix A for non-JAN class level B devices and as specified herein. Product built to this drawing that is produced by a Qualified Manufacturer Listing (QML) certified and qualified manufacturer or a manufacturer who has been granted transitional certification to MIL-PRF-38535 may be processed as QML product in accordance with the manufacturers approved program plan and qualifying activity approval in accordance with MIL-PRF-38535. This QML flow as documented in the Quality Management (QM) plan may make modifications to the requirements herein. These modifications shall not affect form, fit, or function of the device. These modifications shall not affect the PIN as described herein. A "Q" or "QML" certification mark in accordance with MIL-PRF-38535 is required to identify when the QML flow option is used.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		5962-88646
		REVISION LEVEL D	SHEET 3

DSCC FORM 2234  
APR 97

9004708 0034506 9T8

3.2 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-PRF-38535, appendix A and herein.

3.2.1 Case outline(s). The case outline(s) shall be in accordance with 1.2.2 herein and figure 1.

3.2.2 Terminal connections. The terminal connections shall be as specified on figure 2.

3.3 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in table I and shall apply over the full ambient operating temperature range.

3.4 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table II. The electrical tests for each subgroup are described in table I.

3.5 Marking. Marking shall be in accordance with MIL-PRF-38535, appendix A. The part shall be marked with the PIN listed in 1.2 herein. In addition, the manufacturer's PIN may also be marked as listed in MIL-HDBK-103 (see 6.6 herein). For packages where marking of the entire SMD PIN number is not feasible due to space limitations, the manufacturer has the option of not marking the "5962-" on the device.

3.6 Certificate of compliance. A certificate of compliance shall be required from a manufacturer in order to be listed as an approved source of supply in MIL-HDBK-103 (see 6.6 herein). The certificate of compliance submitted to DSCC-VA prior to listing as an approved source of supply shall affirm that the manufacturer's product meets the requirements of MIL-PRF-38535, appendix A and the requirements herein.

3.7 Certificate of conformance. A certificate of conformance as required in MIL-PRF-38535, appendix A shall be provided with each lot of microcircuits delivered to this drawing.

3.8 Notification of change. Notification of change to DSCC-VA shall be required in accordance with MIL-PRF-38535, appendix A.

3.9 Verification and review. DSCC, DSCC's agent, and the acquiring activity retain the option to review the manufacturer's facility and applicable required documentation. Offshore documentation shall be made available onshore at the option of the reviewer.

#### 4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection procedures shall be in accordance with MIL-PRF-38535, appendix A.

4.2 Screening. Screening shall be in accordance with method 5004 of MIL-STD-883, and shall be conducted on all devices prior to quality conformance inspection. The following additional criteria shall apply:

a. Burn-in test, method 1015 of MIL-STD-883.

(1) Test condition A, B, C or D. The test circuit shall be maintained by the manufacturer under document revision level control and shall be made available to the preparing or acquiring activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in test method 1015 of MIL-STD-883.

(2)  $T_A = +125^{\circ}\text{C}$ , minimum.

b. Interim and final electrical test parameters shall be as specified in table II herein, except interim electrical parameter tests prior to burn-in are optional at the discretion of the manufacturer.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		5962-88646
		REVISION LEVEL D	SHEET 4

TABLE I. Electrical performance characteristics.

Test	Symbol	Conditions -55°C ≤ T <sub>A</sub> ≤ +125°C unless otherwise specified		Group A subgroups	Device type	Limits		Unit
						Min	Max	
Reference voltage	V <sub>REF</sub>	(V <sub>IN</sub> - V <sub>OUT</sub> ) = 3.0 V, I <sub>OUT</sub> = 10 mA		1	01	1.238	1.262	V
		1.5 V ≤ (V <sub>IN</sub> - V <sub>OUT</sub> ) ≤ 25 V, 10 mA ≤ I <sub>OUT</sub> ≤ 2.0 A	1/	1, 2, 3		1.225	1.270	
			2/			1.220	1.270	
Line regulation 3/	ΔV <sub>OUT</sub> / ΔV <sub>IN</sub>	1.5 V ≤ (V <sub>IN</sub> - V <sub>OUT</sub> ) ≤ 15 V, I <sub>OUT</sub> = 10 mA		1	01		0.2	%
		15 V ≤ (V <sub>IN</sub> - V <sub>OUT</sub> ) ≤ 35 V, I <sub>OUT</sub> = 10 mA		2, 3			0.5	
Load regulation 3/	ΔV <sub>OUT</sub> / ΔI <sub>OUT</sub>	(V <sub>IN</sub> - V <sub>OUT</sub> ) = 3.0 V, 10 mA ≤ I <sub>OUT</sub> ≤ 2.0 A	1/	1	01		0.3	%
			2/				0.8	
			1/	2, 3			0.4	
			2/				1.0	
Dropout voltage	V <sub>DO</sub>	I <sub>OUT</sub> = 2.0 A, ΔV <sub>REF</sub> = 1%		1, 2, 3	01		1.5	V
Thermal regulation	----	30 ms pulse, T <sub>A</sub> = 25°C		1	01		0.02	%/W
Ripple rejection	ΔV <sub>IN</sub> / ΔV <sub>OUT</sub>	f = 120 Hz, C <sub>ADJ</sub> = 25 μF, C <sub>OUT</sub> = 25 μF (tantalum), I <sub>OUT</sub> = 2.0 A (V <sub>IN</sub> - V <sub>OUT</sub> ) = 3.0 V		4, 5, 6	01	60		dB
Adjustment pin current	I <sub>ADJ</sub>	1.5 V ≤ (V <sub>IN</sub> - V <sub>OUT</sub> ) ≤ 25 V, 10 mA ≤ I <sub>OUT</sub> ≤ 2.0 A		1, 2, 3	01		120	μA

See footnotes at end of table.

**STANDARD  
MICROCIRCUIT DRAWING**  
DEFENSE SUPPLY CENTER COLUMBUS  
COLUMBUS, OHIO 43216-5000

SIZE  
**A**

5962-88646

REVISION LEVEL  
**D**

SHEET  
**5**

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions -55°C ≤ T <sub>A</sub> ≤ +125°C unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
Minimum load current	I <sub>MIN</sub>	(V <sub>IN</sub> - V <sub>OUT</sub> ) = 24 V	1, 2, 3	01		10	mA
Current limit	I <sub>LIM</sub>	(V <sub>IN</sub> - V <sub>OUT</sub> ) = 5.0 V	1, 2, 3	01	3.2		A
		(V <sub>IN</sub> - V <sub>OUT</sub> ) = 25 V			0.2		
Temperature stability <u>4/</u>	ΔV <sub>OUT</sub> / ΔT	-55°C ≤ T <sub>J</sub> ≤ +125°C	1, 2, 3	01		1.5	%
Long term stability <u>4/</u>	ΔV <sub>OUT</sub> / ΔT	T <sub>A</sub> = +125°C, t = 1,000 hrs	2	01		1.0	%

1/ Case X only.

2/ Cases N and U only.

3/ Line and load regulation are measured at a constant junction temperature using a low duty cycle pulse technique. Although power dissipation is internally limited, regulation is guaranteed up to the maximum power dissipation of 30 W. Power dissipation is determined by the input/output differential voltage and the output current. Guaranteed maximum power dissipation will not be available over the full input/output voltage range.

4/ If not tested, shall be guaranteed to the limits specified in table I herein.

**STANDARD  
MICROCIRCUIT DRAWING**  
DEFENSE SUPPLY CENTER COLUMBUS  
COLUMBUS, OHIO 43216-5000


SIZE  
**A**

REVISION LEVEL  
**D**

**5962-88646**

SHEET  
**6**

# Case outline U

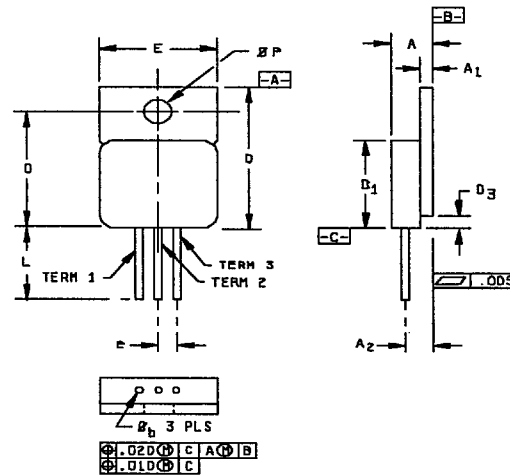

Inches	mm
.005	0.13
.010	0.25
.020	0.51

Symbol	Inches		Millimeters	
	Min	Max	Min	Max
A	.190	.200	4.83	5.08
A <sub>1</sub>	.035	.045	0.89	1.14
A <sub>2</sub>	.120 BSC		3.05 BSC	
φb	.025	.035	0.64	0.89
D	.645	.665	16.38	16.89
D <sub>1</sub>	.410	.430	10.41	10.92
D <sub>3</sub>	.000	.065	0.00	1.65
e	.100 BSC		2.54 BSC	
E	.410	.422	10.41	10.71
L	.500	.750	12.70	19.05
O	.527	.537	13.39	16.64
φP	.140	.150	3.56	3.81

## NOTE:

The US government preferred system of measurement is the metric SI system. However, this item was originally designed using inch-pound units of measurement. In the event of conflict between the metric and inch-pound units, the inch-pound units shall take precedence.


FIGURE 1. Case outlines.

<b>STANDARD</b> <b>MICROCIRCUIT DRAWING</b> DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE <b>A</b>		5962-88646
		REVISION LEVEL D	SHEET 7

DSCC FORM 2234  
APR 97

9004708 0034510 329

# Case outline N

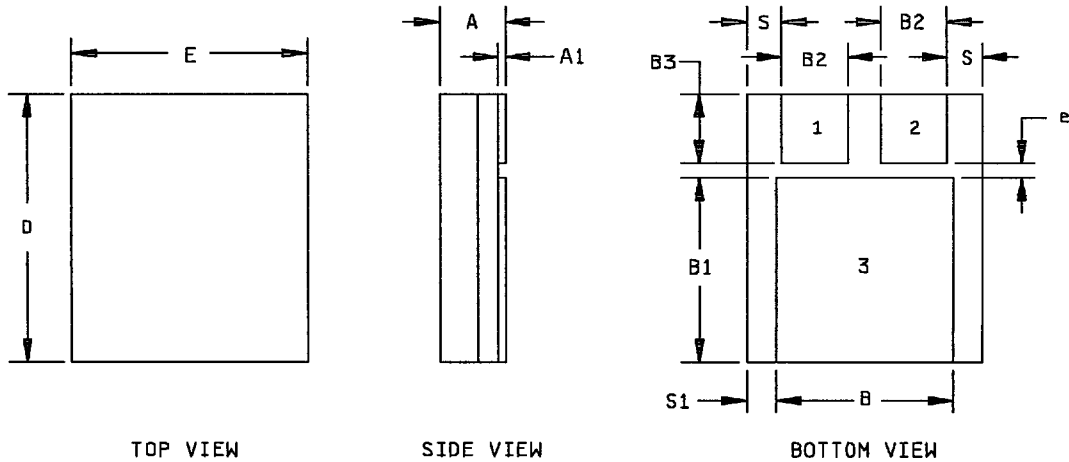

Symbol	Inches		Millimeters	
	Min	Max	Min	Max
A	.130	.150	3.30	3.81
A1	.010	.020	0.25	0.51
B	.370	.380	9.40	9.65
B1	.410	.420	10.41	10.67
B2	.135	.145	3.43	3.68
B3	.152	.162	3.86	4.11
D	.620	.630	15.75	16.00
E	.445	.455	11.30	11.55
e	.030	----	0.76	----
S	.045	.055	1.14	1.40
S1	.035	.045	.089	1.14

## PINOUT

1 IN  
2 OUT  
3 GROUND

## NOTE:

The US government preferred system of measurement is the metric SI system. However, this item was originally designed using inch-pound units of measurement. In the event of conflict between the metric and inch-pound units, the inch-pound units shall take precedence.



FIGURE 1. Case outlines -Continued.

<b>STANDARD MICROCIRCUIT DRAWING</b> DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE <b>A</b>		<b>5962-88646</b>
		REVISION LEVEL <b>D</b>	SHEET <b>8</b>

DSCC FORM 2234  
APR 97

9004708 0034511 265



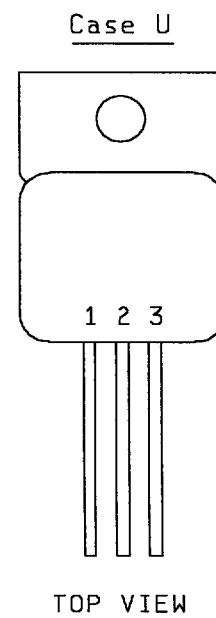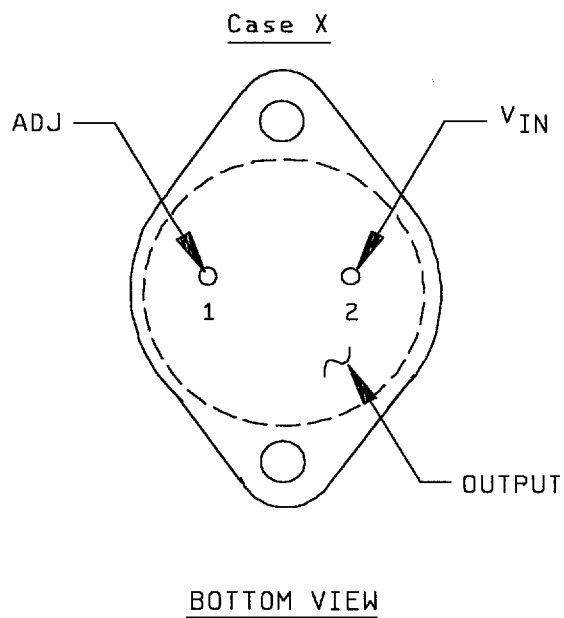

Case U

1 ADJUST  
2  $V_{OUT}$   
3  $V_{IN}$

FIGURE 2. Terminal connections.

<b>STANDARD MICROCIRCUIT DRAWING</b> DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE <b>A</b>		<b>5962-88646</b>
		REVISION LEVEL <b>D</b>	SHEET <b>9</b>

DSCC FORM 2234  
APR 97

■ 9004708 0034512 1T1 ■

TABLE II. Electrical test requirements.

MIL-STD-883 test requirements	Subgroups (in accordance with MIL-STD-883, method 5005, table I)
Interim electrical parameters (method 5004)	1
Final electrical test parameters (method 5004)	1*,2,3,4,5,6
Group A test requirements (method 5005)	1,2,3,4,5,6
Groups C and D end-point electrical parameters (method 5005)	1

\* PDA applies to subgroup 1.

4.3 Quality conformance inspection. Quality conformance inspection shall be in accordance with method 5005 of MIL-STD-883 including groups A, B, C, and D inspections. The following additional criteria shall apply.

4.3.1 Group A inspection.

- a. Tests shall be as specified in table II herein.
- b. Subgroups 7, 8, 9, 10, and 11 in table I, method 5005 of MIL-STD-883 shall be omitted.

4.3.2 Groups C and D inspections.

- a. End-point electrical parameters shall be as specified in table II herein.
- b. Steady-state life test conditions, method 1005 of MIL-STD-883.
  - (1) Test condition A, B, C or D. The test circuit shall be maintained by the manufacturer under document revision level control and shall be made available to the preparing or acquiring activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in test method 1005 of MIL-STD-883.
  - (2)  $T_A = +125^{\circ}\text{C}$ , minimum.
  - (3) Test duration: 1,000 hours, except as permitted by method 1005 of MIL-STD-883.

<b>STANDARD MICROCIRCUIT DRAWING</b> DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE <b>A</b>		<b>5962-88646</b>
		REVISION LEVEL <b>D</b>	SHEET <b>10</b>

DSCC FORM 2234  
APR 97

■ 9004708 0034513 038 ■

## 5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-PRF-38535, appendix A.

## 6. NOTES

6.1 Intended use. Microcircuits conforming to this drawing are intended for use for Government microcircuit applications (original equipment), design applications, and logistics purposes.

6.2 Replaceability. Microcircuits covered by this drawing will replace the same generic device covered by a contractor-prepared specification or drawing.

6.3 Configuration control of SMD's. All proposed changes to existing SMD's will be coordinated with the users of record for the individual documents. This coordination will be accomplished in accordance with MIL-STD-973 using DD Form 1692, Engineering Change Proposal.

6.4 Record of users. Military and industrial users shall inform Defense Supply Center Columbus when a system application requires configuration control and the applicable SMD. DSCC will maintain a record of users and this list will be used for coordination and distribution of changes to the drawings. Users of drawings covering microelectronics devices (FSC 5962) should contact DSCC-VA, telephone (614) 692-0525.

6.5 Comments. Comments on this drawing should be directed to DSCC-VA, Columbus, Ohio 43216-5000, or telephone (614) 692-0674.

6.6 Approved sources of supply. Approved sources of supply are listed in MIL-HDBK-103. The vendors listed in MIL-HDBK-103 have agreed to this drawing and a certificate of compliance (see 3.6 herein) has been submitted to and accepted by DSCC-VA.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		5962-88646
		REVISION LEVEL D	SHEET 11

DSCC FORM 2234  
APR 97

■ 9004708 0034514 T74 ■

## STANDARD MICROCIRCUIT DRAWING BULLETIN

DATE: 98-03-04

Approved sources of supply for SMD 5962-88646 are listed below for immediate acquisition information only and shall be added to MIL-HDBK-103 during the next revision. MIL-HDBK-103 will be revised to include the addition or deletion of sources. The vendors listed below have agreed to this drawing and a certificate of compliance has been submitted to and accepted by DSCC-VA. This bulletin is superseded by the next dated revision of MIL-HDBK-103.

Standard microcircuit drawing PIN <u>1/</u>	Vendor CAGE number	Vendor similar PIN <u>2/</u>
5962-8864601XA	64155	LT1085MK/883
5962-8864601UA	69210	OM1850STM/883
5962-8864601NA	69210	OM1850NMM
5962-8864601NB	69210	OM1850NMM

1/ The lead finish shown for each PIN representing a hermetic package is the most readily available from the manufacturer listed for that part. If the desired lead finish is not listed contact the vendor to determine its availability.

2/ Caution. Do not use this number for item acquisition. Items acquired to this number may not satisfy the performance requirements of this drawing.

Vendor CAGE  
number

Vendor name  
and address

64155

Linear Technology Corporation  
1630 McCarthy Boulevard  
Milpitas, CA 95035-7487

69210

Omnirel Corporation  
205 Crawford Street  
Leominster, MA 01453-2353

The information contained herein is disseminated for convenience only and the Government assumes no liability whatsoever for any inaccuracies in the information bulletin.