



## 1. SCOPE

1.1 Scope. This drawing describes device requirements for class B microcircuits in accordance with 1.2.1 of MIL-STD-883, "Provisions for the use of MIL-STD-883 in conjunction with compliant non-JAN devices".

1.2 Part number. The complete part number shall be as shown in the following example:

5962-86872	01	C	X
Drawing number	Device type (1.2.1)	Case outline (1.2.2)	Lead finish per MIL-M-38510

1.2.1 Device type. The device type shall identify the circuit function as follows:

Device type	Generic number	Circuit function
01	54F38	Quad two-input NAND buffer with open collector outputs

1.2.2 Case outlines. The case outlines shall be as designated in appendix C of MIL-M-38510, and as follows:

Outline letter	Case outline
C	D-1 (14-lead, .785" x .310" x .200"), dual-in-line package
D	F-2 (14-lead, .390" x .260" x .085"), flat package
2	C-2 (20-terminal, .358" x .358" x .100"), square chip carrier package

## 1.3 Absolute maximum ratings.

Supply voltage range - - - - -	-0.5 V dc minimum to +7.0 V dc maximum
Input voltage range- - - - -	-1.2 V dc minimum at -18 mA to +7.0 V dc maximum
Output sink current- - - - -	128 mA
Maximum power dissipation ( $P_D$ ) - - - - -	165 mW
Thermal resistance, junction-to-case ( $\theta_{JC}$ ):- - - - -	See MIL-M-38510, appendix C
Lead temperature (soldering, 10 seconds) - - - - -	+300°C
Junction temperature ( $T_J$ )- - - - -	+175°C
Storage temperature range- - - - -	-65°C to +150°C

## 1.4 Recommended operating conditions.

Supply voltage ( $V_{CC}$ ) - - - - -	4.5 V dc minimum to 5.5 V dc maximum
Minimum high level input voltage ( $V_{IH}$ ) - - - - -	2.0 V dc
Maximum low level input voltage ( $V_{IL}$ )- - - - -	0.8 V dc
Case operating temperature range ( $T_C$ )- - - - -	-55°C to +125°C

<b>STANDARDIZED MILITARY DRAWING</b> DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE <b>A</b>	5962-86872	
	REVISION LEVEL A		SHEET 2

DESC FORM 193A  
SEP 87

U.S. GOVERNMENT PRINTING OFFICE: 1987-549-096

## 2. APPLICABLE DOCUMENTS

2.1 Government specification and standard. Unless otherwise specified, the following specification and standard, of the issue listed in that issue of the Department of Defense Index of Specifications and Standards specified in the solicitation, form a part of this drawing to the extent specified herein.

### SPECIFICATION

#### MILITARY

MIL-M-38510 - Microcircuits, General Specification for.

### STANDARD

#### MILITARY

MIL-STD-883 - Test Methods and Procedures for Microelectronics.

(Copies of the specification and standard required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Order of precedence. In the event of a conflict between the text of this drawing and the references cited herein, the text of this drawing shall take precedence.

## 3. REQUIREMENTS

3.1 Item requirements. The individual item requirements shall be in accordance with 1.2.1 of MIL-STD-883, "Provisions for the use of MIL-STD-883 in conjunction with compliant non-JAN devices" and as specified herein.

3.2 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-M-38510 and herein.

3.2.1 Terminal connections and logic diagram. The terminal connections and logic diagram shall be as specified on figure 1.

3.2.2 Truth table. The truth table shall be as specified on figure 2.

3.2.3 Switching waveforms and test circuit. The switching waveforms and test circuit shall be as specified on figure 3.

3.2.4 Case outlines. The case outlines shall be in accordance with 1.2.2 herein.

3.3 Electrical performance characteristics. Unless otherwise specified, the electrical performance characteristics are as specified in table I and apply over the full case operating temperature range.

3.4 Marking. Marking shall be in accordance with MIL-STD-883 (see 3.1 herein). The part shall be marked with the part number listed in 1.2 herein. In addition, the manufacturer's part number may also be marked as listed in 6.4 herein.

3.5 Certificate of compliance. A certificate of compliance shall be required from a manufacturer in order to be listed as an approved source of supply in 6.4. The certificate of compliance submitted to DESC-ECS prior to listing as an approved source of supply shall state that the manufacturer's product meets the requirements of MIL-STD-883 (see 3.1 herein) and the requirements herein.

## STANDARDIZED MILITARY DRAWING

DEFENSE ELECTRONICS SUPPLY CENTER  
DAYTON, OHIO 45444

SIZE  
A

5962-86872

REVISION LEVEL A

SHEET 3

DESC FORM 193A  
SEP 87

☆ U.S. GOVERNMENT PRINTING OFFICE 1987-549-096

TABLE I. Electrical performance characteristics.

Test	Symbol	Conditions -55°C < T <sub>C</sub> < +125°C unless otherwise specified	Group A subgroups	Limits		Unit
				Min	Max	
Maximum collector cut-off current	I <sub>CEX</sub>	V <sub>CC</sub> = 4.5 V, V <sub>IN</sub> = 0.8 V Inputs not under test = 5.5 V Outputs under test are at 4.5 V (V <sub>OH</sub> )	1, 2, 3		250	μA
Low level output voltage	V <sub>OL</sub>	V <sub>CC</sub> = 4.5 V, I <sub>OL</sub> = 20 mA, V <sub>IN</sub> = 2.0 V	1, 2, 3		0.5	V
Input clamp voltage	V <sub>IC</sub>	V <sub>CC</sub> = 4.5 V, I <sub>IN</sub> = -18 mA	1		-1.2	V
High level input current	I <sub>IH1</sub>	V <sub>CC</sub> = 5.5 V, V <sub>IN</sub> = 2.7 V	1, 2, 3		20	μA
	I <sub>IH2</sub>	V <sub>CC</sub> = 5.5 V, V <sub>IN</sub> = 7.0 V	1, 2, 3		100	μA
Low level input current	I <sub>IL</sub>	V <sub>CC</sub> = 5.5 V, V <sub>IN</sub> = 0.5 V	1, 2, 3		-1.2	mA
Supply current	I <sub>CCH</sub>	V <sub>CC</sub> = 5.5 V, V <sub>IN</sub> = GND	1, 2, 3		7	mA
	I <sub>CCL</sub>	V <sub>CC</sub> = 5.5 V, V <sub>IN</sub> = 5.5 V	1, 2, 3		30	mA
Functional tests		See 4.3.1c	7			
Propagation delay time, A, B to Y	t <sub>PHL</sub>	V <sub>CC</sub> = 5.0 V, R <sub>L</sub> = 500Ω ±2% C <sub>L</sub> = 50 pF ±10% See figure 3	9, 10, 11	1.0	6	ns
	t <sub>PLH</sub>		9, 10, 11	7.0	15	ns

**STANDARDIZED  
MILITARY DRAWING**

DEFENSE ELECTRONICS SUPPLY CENTER  
DAYTON, OHIO 45444

SIZE  
**A**

5962-86872

REVISION LEVEL **A**

SHEET **4**

DESC FORM 193A  
SEP 87

☆ U.S. GOVERNMENT PRINTING OFFICE 1987-549-016

3.6 Certificate of conformance. A certificate of conformance as required in MIL-STD-883 (see 3.1 herein) shall be provided with each lot of microcircuits delivered to this drawing.

3.7 Notification of change. Notification of change to DESC-ECS shall be required in accordance with MIL-STD-883 (see 3.1 herein).

3.8 Verification and review. DESC, DESC's agent, and the acquiring activity retain the option to review the manufacturer's facility and applicable required documentation. Offshore documentation shall be made available onshore at the option of the reviewer.

#### 4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection procedures shall be in accordance with section 4 of MIL-M-38510 to the extent specified in MIL-STD-883 (see 3.1 herein).

4.2 Screening. Screening shall be in accordance with method 5004 of MIL-STD-883, and shall be conducted on all devices prior to quality conformance inspection. The following additional criteria shall apply:

a. Burn-in test, method 1015 of MIL-STD-883.

(1) Test condition A, B, C, D, or E using the circuit submitted with the certificate of compliance (see 3.5 herein).

(2)  $T_A = +125^{\circ}\text{C}$ , minimum.

b. Interim and final electrical test parameters shall be as specified in table II herein, except interim electrical parameter tests prior to burn-in are optional at the discretion of the manufacturer.

4.3 Quality conformance inspection. Quality conformance inspection shall be in accordance with method 5005 of MIL-STD-883 including groups A, B, C, and D inspections. The following additional criteria shall apply.

##### 4.3.1 Group A inspection.

a. Tests shall be as specified in table II herein.

b. Subgroups 4, 5, 6, and 8 in table I, method 5005 of MIL-STD-883 shall be omitted.

c. Subgroup 7 tests shall verify truth table.

##### 4.3.2 Groups C and D inspections.

a. End-point electrical parameters shall be as specified in table II herein.

b. Steady-state life test conditions, method 1005 of MIL-STD-883:

(1) Test condition A, B, C, or D using the circuit submitted with the certificate of compliance (see 3.5 herein).

(2)  $T_A = +125^{\circ}\text{C}$ , minimum.

(3) Test duration: 1,000 hours, except as permitted by method 1005 of MIL-STD-883.

### STANDARDIZED MILITARY DRAWING

DEFENSE ELECTRONICS SUPPLY CENTER  
DAYTON, OHIO 45444

SIZE  
A

5962-86872


REVISION LEVEL A

SHEET 5

DESC FORM 193A  
SEP 87

☆ U.S. GOVERNMENT PRINTING OFFICE 1987-549-196

Cases C and D

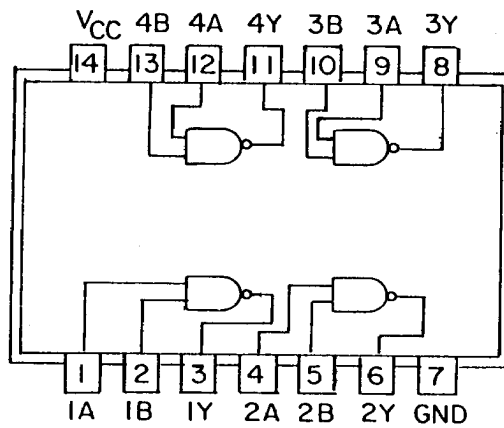

Case 2  
(top view)

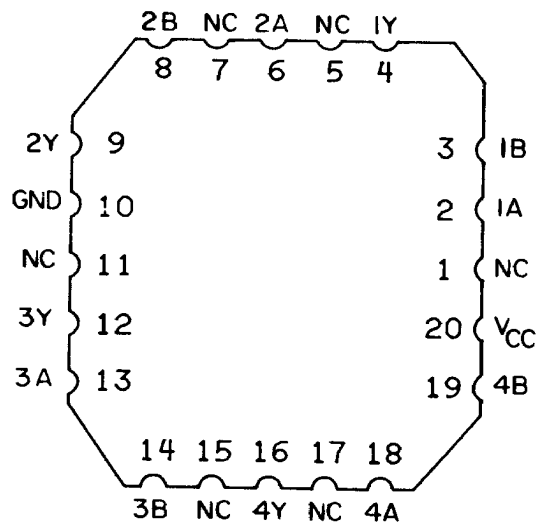


FIGURE 1. Terminal connections and logic diagram.

**STANDARDIZED  
MILITARY DRAWING**

DEFENSE ELECTRONICS SUPPLY CENTER  
DAYTON, OHIO 45444

SIZE  
**A**

5962-86872

REVISION LEVEL

A

SHEET

6

DESC FORM 193A  
SEP 87

☆ U.S. GOVERNMENT PRINTING OFFICE: 1967-549-6196

Truth table (each gate)		
Input		Output
A	B	Y
L	L	H
H	L	H
L	H	H
H	H	L

Positive logic  $Y = \overline{AB}$

L = Low voltage level


H = High voltage level

FIGURE 2. Truth table.


<b>STANDARDIZED MILITARY DRAWING</b> DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE <b>A</b>		5962-86872
		REVISION LEVEL A	SHEET 7

DESC FORM 193A  
SEP 87

U.S. GOVERNMENT PRINTING OFFICE 1987 549 096

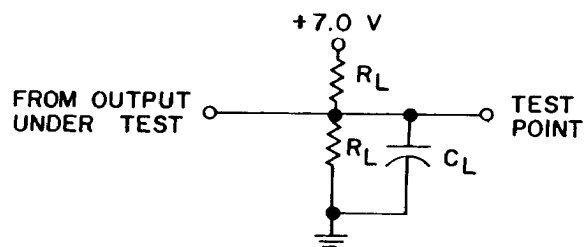

TEST CIRCUIT

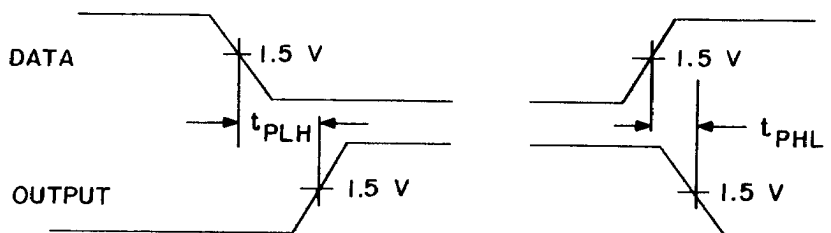

- NOTES: 1. The pulse generator shall have the following characteristics:  
 $t_r = t_f \leq 2.5 \text{ ns}$ ;  $\text{PRR} \leq 1 \text{ MHz}$ ;  $Z_{\text{OUT}} = 50\Omega$ .
2. Inputs not under test are at GND or 2.7 V.
3.  $C_L = 50 \text{ pF} \pm 10\%$ , including scope probe, wiring, and stray capacitance without the package in the test fixture.
4.  $R_L = 500\Omega \pm 2\%$ .
5. Voltage measurements shall be made with respect to the network ground terminal.

FIGURE 3. Switching waveforms and test circuit.

<b>STANDARDIZED MILITARY DRAWING</b> DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE <b>A</b>	5962-86872	
		REVISION LEVEL A	SHEET 8

DESC FORM 193A  
 SEP 87

☆ U.S. GOVERNMENT PRINTING OFFICE: 1987 748 129-6093



TABLE II. Electrical test requirements.

MIL-STD-883 test requirements	Subgroups (per method 5005, table I)
Interim electrical parameters (method 5004)	---
Final electrical test parameters (method 5004)	1*, 2, 3, 7, 9
Group A test requirements (method 5005)	1, 2, 3, 7, 9, 10, 11
Groups C and D end-point electrical parameters (method 5005)	1, 2, 3

\* PDA applies to subgroup 1.

## 5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-M-38510

## 6. NOTES

6.1 Intended use. Microcircuits conforming to this drawing are intended for use when military specifications do not exist and qualified military devices that will perform the required function are not available for OEM application. When a military specification exists and the product covered by this drawing has been qualified for listing on QPL-38510, the device specified herein will be inactivated and will not be used for new design. The QPL-38510 product shall be the preferred item for all applications.

### 6.2 Replaceability.

- a. Microcircuits covered by this drawing will replace the same generic device covered by a contractor-prepared specification or drawing.
- b. When a QPL source is established, the part numbered device specified in this drawing will be replaced by the microcircuit identified as part number M38510/35202--.

6.3 Comments. Comments on this drawing should be directed to DESC-ECS, Dayton, Ohio 45444, or telephone 513-296-5375.

**STANDARDIZED  
MILITARY DRAWING**

DEFENSE ELECTRONICS SUPPLY CENTER  
DAYTON, OHIO 45444

A SIZE  
**A**

5962-87682

REVISION LEVEL  
**A**

SHEET **9**

DESC FORM 193A  
SEP 87

☆ U.S. GOVERNMENT PRINTING OFFICE 1987-549-096

6.4 Approved sources of supply. Approved sources of supply are listed herein. Additional sources will be added as they become available. The vendors listed herein have agreed to this drawing and a certificate of compliance (see 3.5 herein) has been submitted to DESC-ECS.

Military drawing part number	Vendor CAGE number	Vendor similar part number <u>1/</u>	Replacement military specification part number
5962-8687201CX <u>2/</u>	18324	54F38/BCA	M38510/35202BCX
5962-8687201DX <u>2/</u>	18324	54F38/BDA	M38510/35202BDX
5962-86872012X <u>2/</u>	18324	54F38/B2C	M38510/35202B2X

1/ Caution. Do not use this number for item acquisition. Items acquired to this number may not satisfy the performance requirements of this drawing.

2/ Inactive for new design. Use QPL-38510 product.

Vendor CAGE number

18324

Vendor name and address

Signetics Corporation  
4130 South Market Court  
Sacramento, CA 95834

**STANDARDIZED  
MILITARY DRAWING**

DEFENSE ELECTRONICS SUPPLY CENTER  
DAYTON, OHIO 45444

SIZE  
**A**

5962-86872

REVISION LEVEL

A

SHEET 10

DESC FORM 193A  
SEP 87

☆ U.S. GOVERNMENT PRINTING OFFICE: 1987-549-096

011909 \_ \_ \_