


SKiiP 38NAB12T4V1

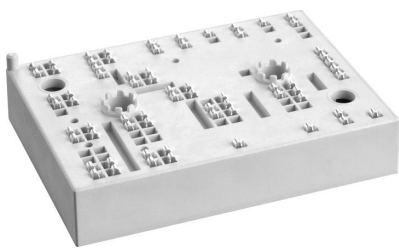

MiniSKiiP® 3

3-phase bridge rectifier +
brake chopper + 3-phase
bridge inverter
SKiiP 38NAB12T4V1

Features


- Trench 4 IGBT's
- Robust and soft freewheeling diodes in CAL technology
- Highly reliable spring contacts for electrical connections
- UL recognised file no. E63532

Typical Applications*

- Inverter up to 41 kVA
- Typical motor power 22 kW

Remarks

- V_{CEsat} , V_F = chip level value
- Case temp. limited to $T_C = 125^\circ\text{C}$ max. (for baseplateless modules $T_C = T_S$)
- product rel. results valid for $T_{j \leq 150}$ (recomm. $T_{op} = -40 \dots +150^\circ\text{C}$)
- for short circuit: Soft R_{Goff} recommended

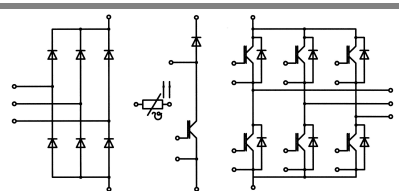

NAB

Absolute Maximum Ratings		T _s = 25 °C, unless otherwise specified	
Symbol	Conditions	Values	Units
IGBT - Inverter, Chopper			
V _{CES}	T _s = 25 (70) °C	1200	V
I _C		115 (93)	A
I _{CRM}		300	A
V _{GES}		± 20	V
T _j		- 40 ... + 175	°C
Diode - Inverter, Chopper			
I _F	T _s = 25 (70) °C	99 (79)	A
I _{FRM}		300	A
T _j		- 40 ... + 175	°C
Diode - Rectifier			
V _{RRM}	T _s = 70 °C	1600	V
I _F		83	A
I _{FSM}		1000	A
i ² t		6600	A ² s
T _j		- 40 ... + 150	°C
Module			
I _{rRMS}	per power terminal (20 A / spring)	80	A
T _{stg}		- 40 ... + 125	°C
V _{isol}	AC, 1 min.	2500	V

Characteristics		$T_s = 25^\circ\text{C}$, unless otherwise specified			
Symbol	Conditions	min.	typ.	max.	Units
IGBT - Inverter, Chopper					
V_{CEsat}	$I_{Cnom} = 100 \text{ A}$, $T_j = 25 (150)^\circ\text{C}$		1,8 (2,2)	2 (2,4)	V
$V_{GE(th)}$	$V_{GE} = V_{CE}$, $I_C = 4 \text{ mA}$	5	5,8	6,5	V
$V_{CE(TO)}$	$T_j = 25 (150)^\circ\text{C}$		0,8 (0,7)	0,9 (0,8)	V
r_T	$T_j = 25 (150)^\circ\text{C}$		10 (15)	11 (16)	m Ω
C_{ies}	$V_{CE} = 25 \text{ V}$, $V_{GE} = 0 \text{ V}$, $f = 1 \text{ MHz}$		4,4		nF
C_{oes}	$V_{CE} = 25 \text{ V}$, $V_{GE} = 0 \text{ V}$, $f = 1 \text{ MHz}$		0,29		nF
C_{res}	$V_{CE} = 25 \text{ V}$, $V_{GE} = 0 \text{ V}$, $f = 1 \text{ MHz}$		0,24		nF
$R_{th(j-s)}$	per IGBT		0,48		K/W
$t_{d(on)}$	under following conditions		160		ns
t_r	$V_{CC} = 600 \text{ V}$, $V_{GE} = \pm 15 \text{ V}$		35		ns
$t_{d(off)}$	$I_{Cnom} = 100 \text{ A}$, $T_j = 150^\circ\text{C}$		390		ns
t_f	$R_{Gon} = R_{Goff} = 1 \Omega$		75		ns
E_{on}	inductive load		11,2		mJ
E_{off}			10		mJ
Diode - Inverter, Chopper					
$V_F = V_{EC}$	$I_{Fnom} = 100 \text{ A}$, $T_j = 25 (150)^\circ\text{C}$		2,2 (2,1)	2,5 (2,45)	V
$V_{(TO)}$	$T_j = 25 (150)^\circ\text{C}$		1,3 (0,9)	1,5 (1,1)	V
r_T	$T_j = 25 (150)^\circ\text{C}$		9 (12)	10 (14)	m Ω
$R_{th(j-s)}$	per diode		0,66		K/W
I_{RRM}	under following conditions		82		A
Q_{rr}	$I_{Fnom} = 100 \text{ A}$, $V_R = 600 \text{ V}$		16,4		μC
E_{rr}	$V_{GE} = 0 \text{ V}$, $T_j = 150^\circ\text{C}$ $di_F/dt = 2400 \text{ A}/\mu\text{s}$		6,5		mJ
Diode - Rectifier					
V_F	$I_{Fnom} = 75 \text{ A}$, $T_j = 25^\circ\text{C}$		1,2		V
$V_{(TO)}$	$T_j = 150^\circ\text{C}$		0,8		V
r_T	$T_j = 150^\circ\text{C}$		7		m Ω
$R_{th(j-s)}$	per diode		0,7		K/W
Temperature Sensor					
R_{ts}	3 %, $T_r = 25 (100)^\circ\text{C}$		1000(1670)		Ω
Mechanical Data					
w			95		g
M_s	Mounting torque	2		2,5	Nm

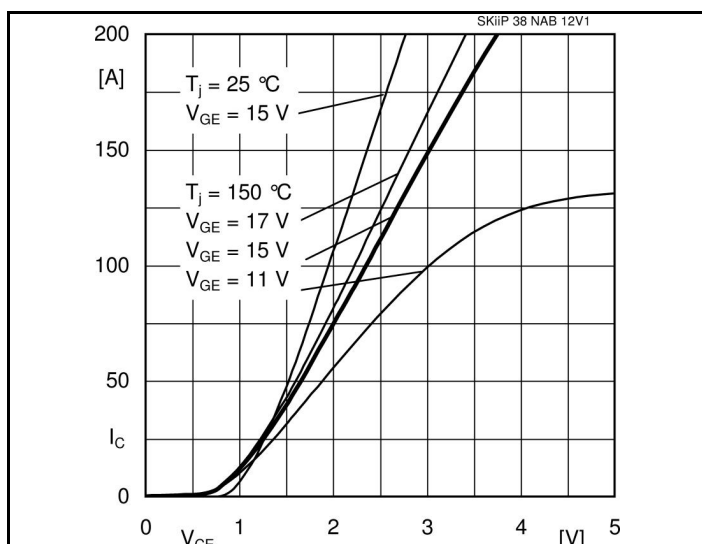


Fig. 1 Typ. output characteristic

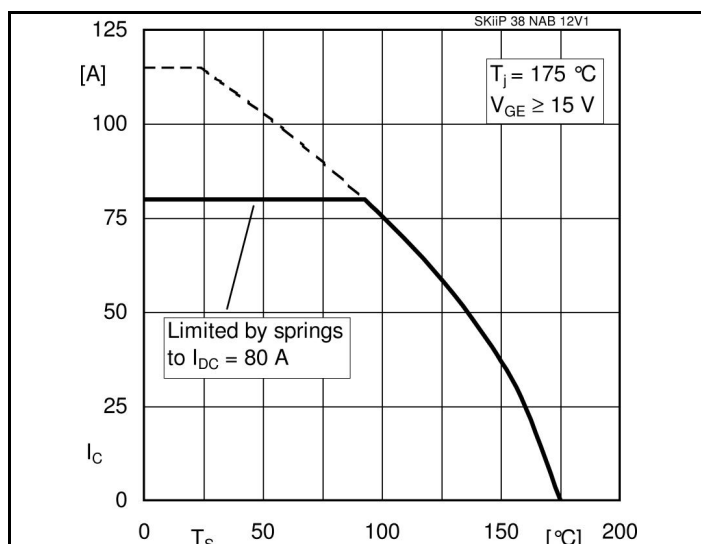


Fig. 2 Typ. rated current vs. temperature $I_C = f(T_S)$

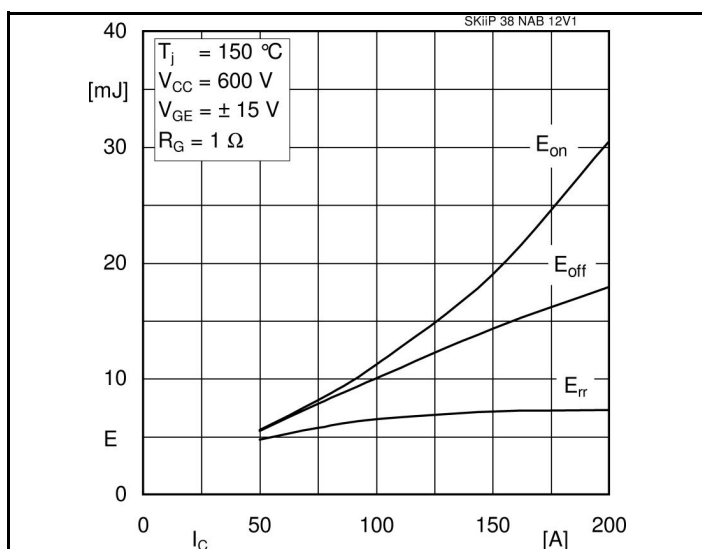


Fig. 3 Typ. turn-on /off energy = $f(I_C)$

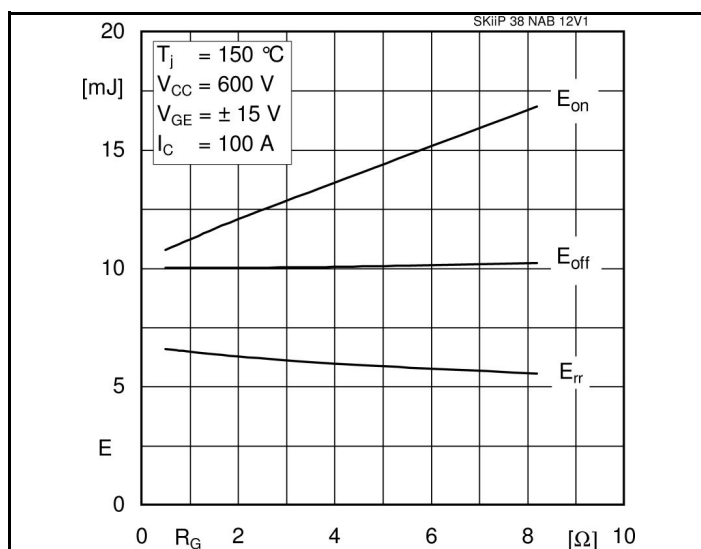


Fig. 4 Typ. turn-on /off energy = $f(R_G)$

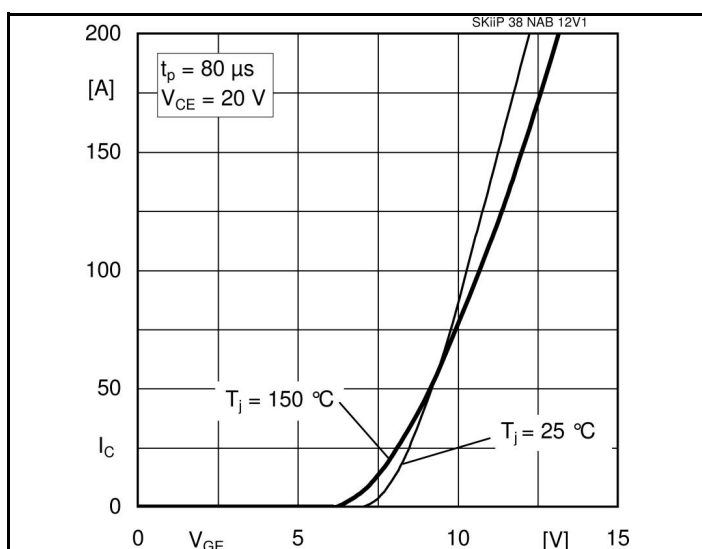


Fig. 5 Typ. transfer characteristic









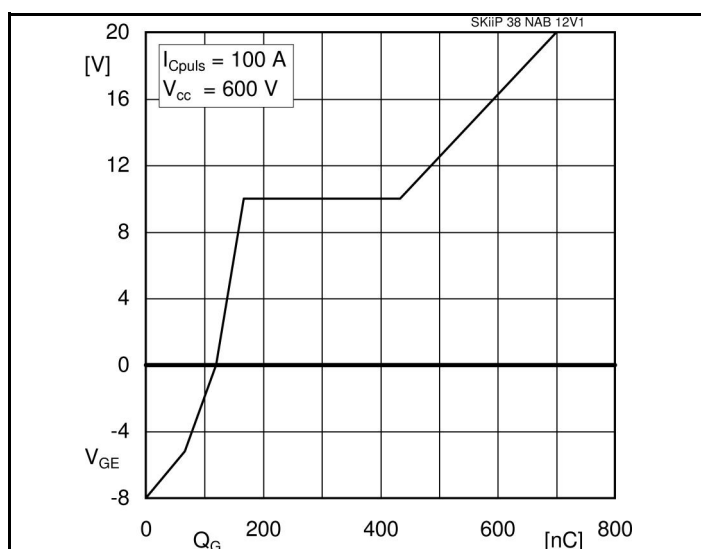


Fig. 6 Typ. gate charge characteristic

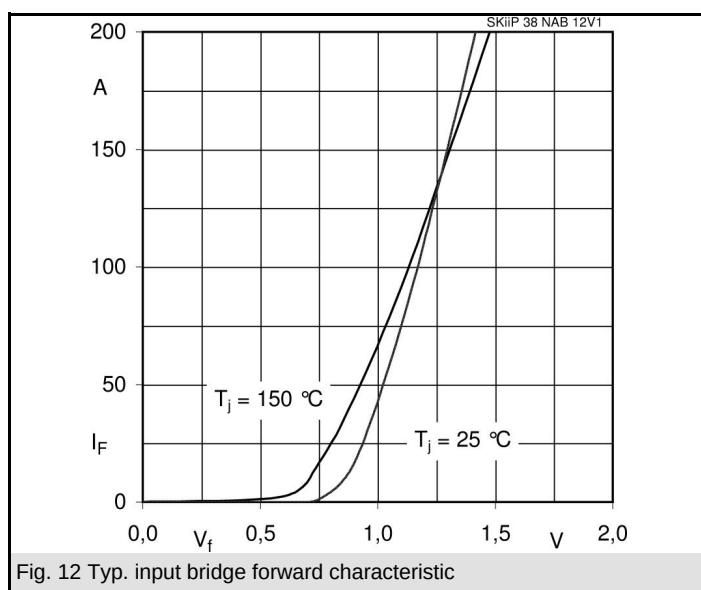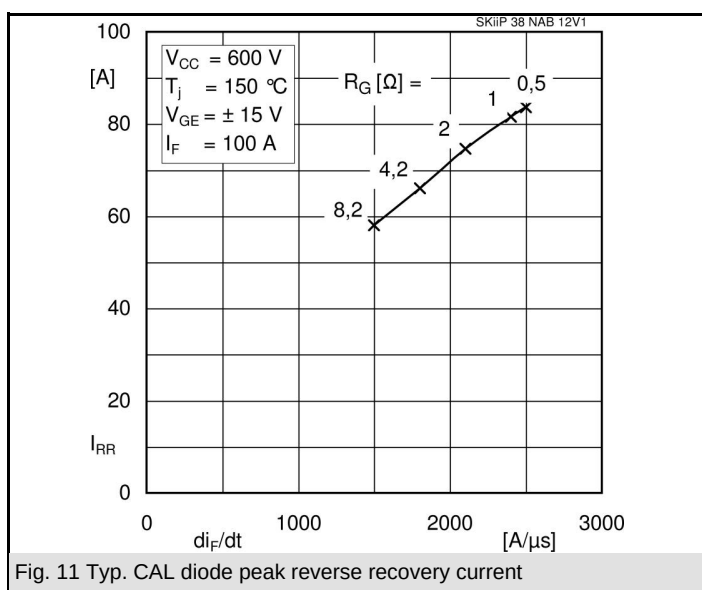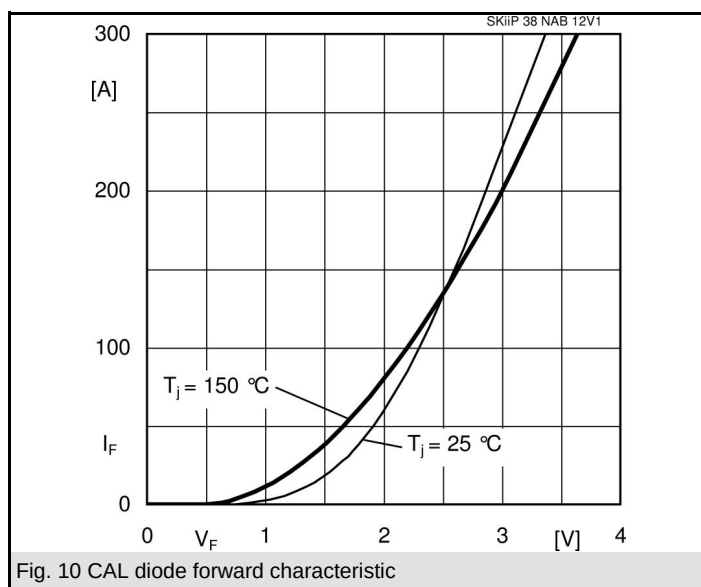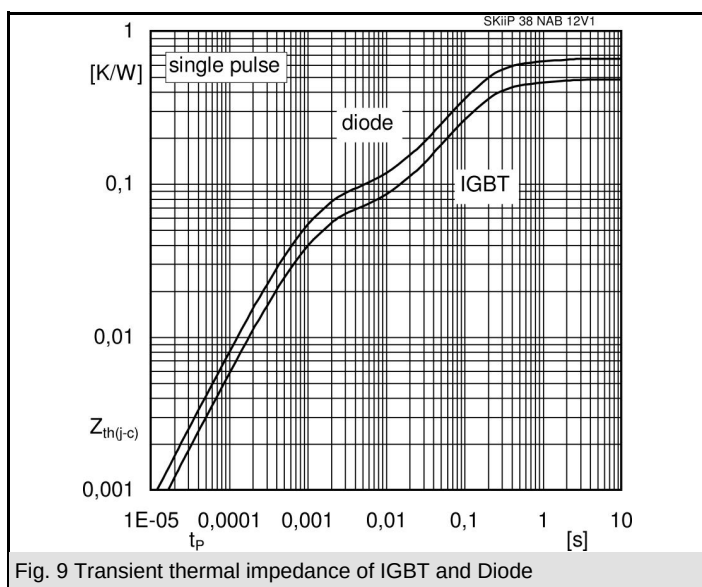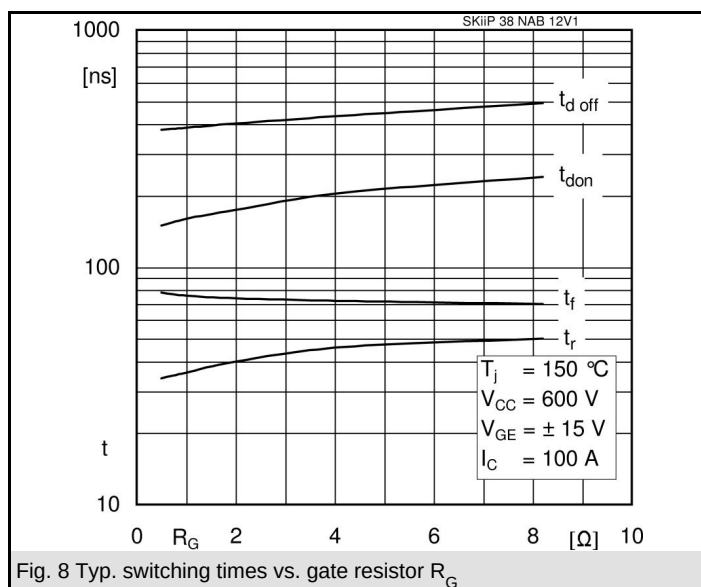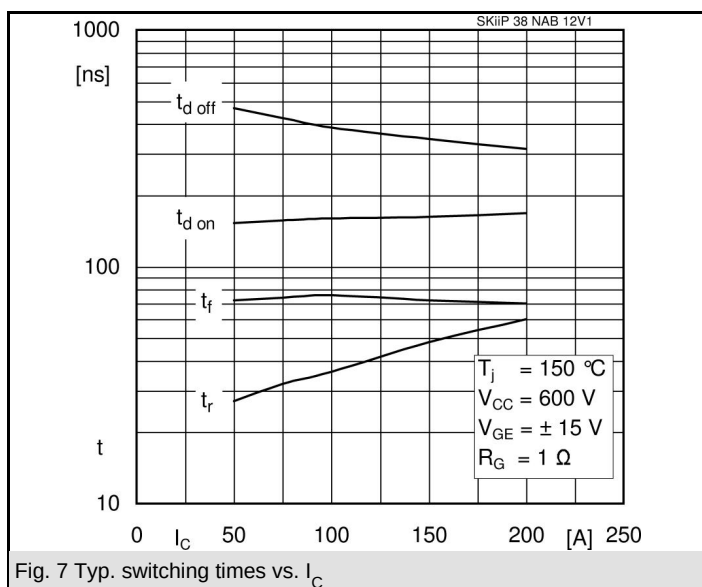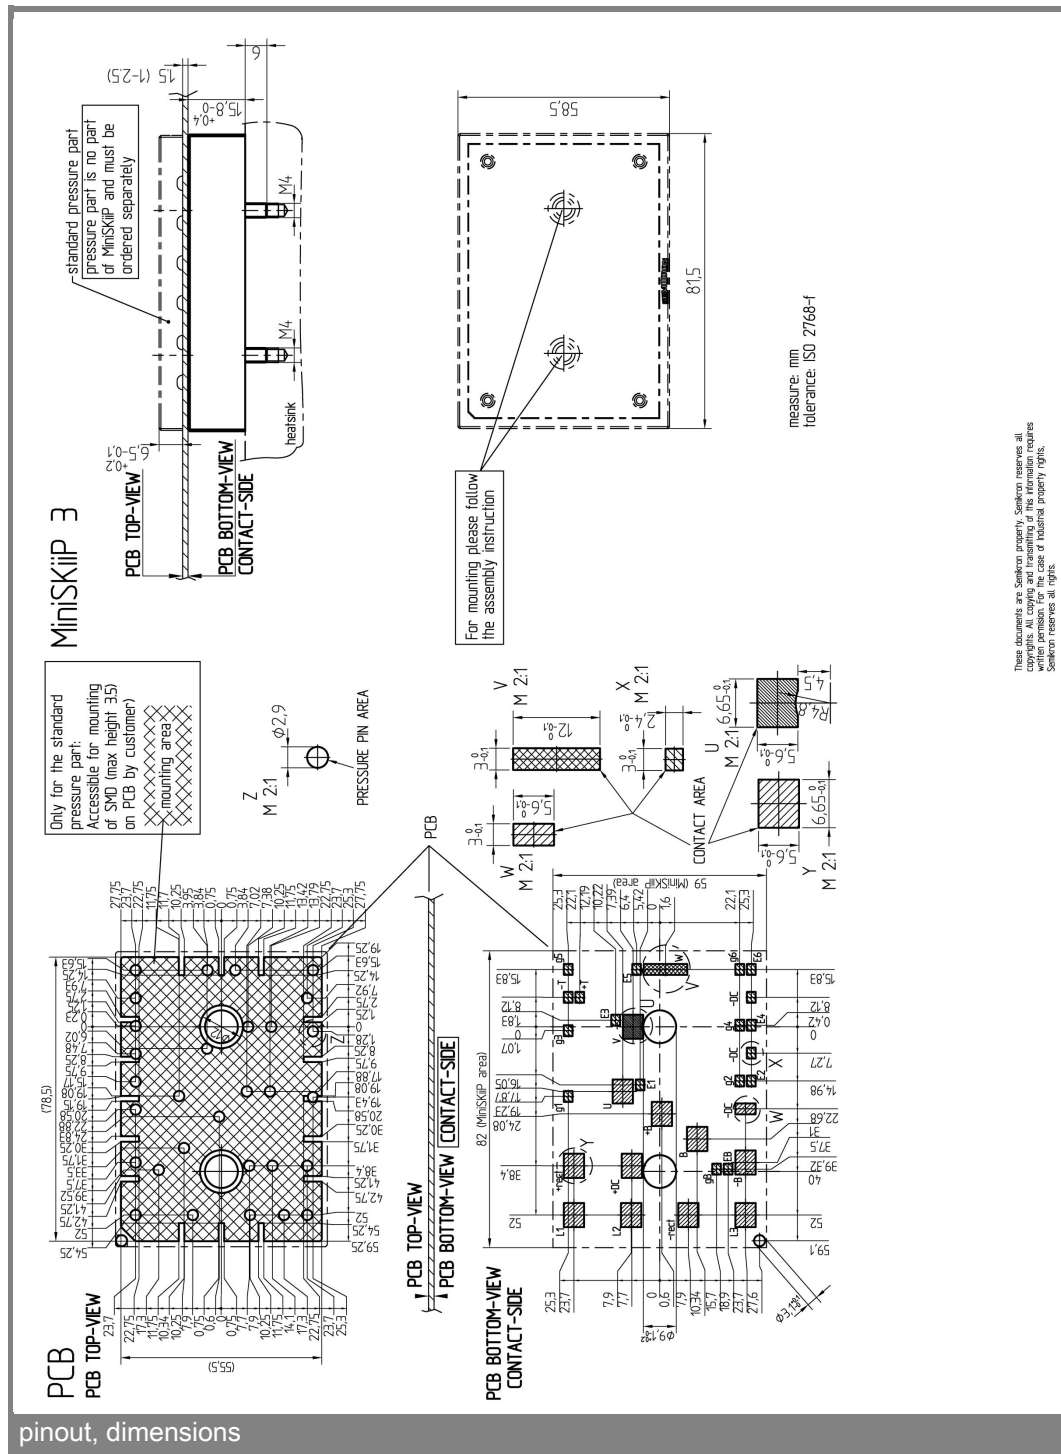

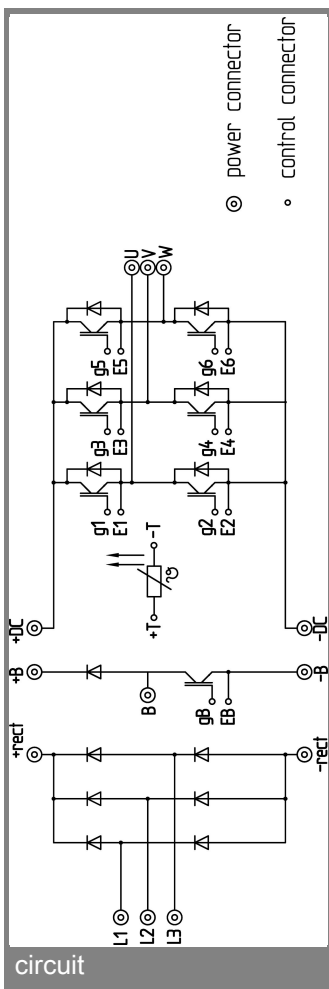

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.

* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our personal.