

SKINTOP® MSR

Universal gland in brass

SKINTOP® MSR


This SKINTOP® version is equipped with a reducing seal insert to seal cables with smaller outer diameters.

Type reduction permits more economic storage.

Suitable accessories see page 412 and 447.

SKINTOP® MSR with long thread

Additional we offer our proven SKINTOP® MS with long thread. PG 7 to PG 21 with 12 mm and PG 29 with 15 mm thread for thick wall housing.

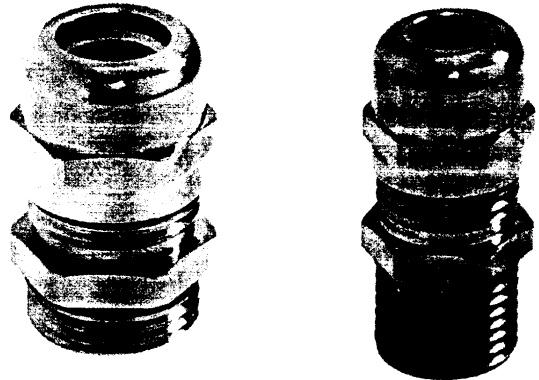


Technical Data

 Material:
Body: brass, nickel-plated
Insert: Polyamid
Sealing ring: Neoprene
O-ring: Perbunan

 Protection class: IP 68 – 5 bar

 Temperature range:
-30 °C to +100 °C

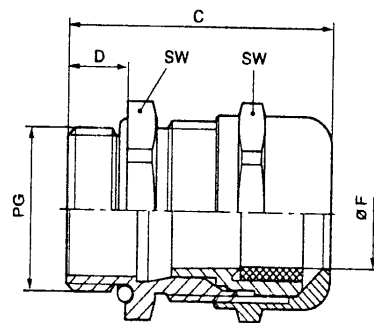

Part Number	Type PG-size	Clamping range mm	Wrench size mm	C mm	D mm	Pack size pieces
SKINTOP® MSR						
5201 5770	MSR 7	2 - 5	14	25	5	100
5201 5780	MSR 9	2 - 6	17	29	6	100
5201 5790	MSR 11	3 - 7	20	32	6	50
5201 5800	MSR 13,5	4 - 9	22	34	6,5	50
5201 5810	MSR 16	6 - 13	24	35	6,5	50
5201 5820	MSR 21	8 - 16	30	40	7	25
5201 5830	MSR 29	10,5 - 20	40	48	8	25
5201 5831	MSR 36	19 - 26	50	62	15	10
5201 5832	MSR 42	24 - 31	57	62	15	5
5201 5833	MSR 48	28 - 35	64	62	15	5

SKINTOP® MSR long

Part Number	Type PG-size	Clamping range mm	Wrench size mm	C mm	D mm	Pack size pieces
5211 5770	MSR 7 long	2 - 5	14	32	12	100
5211 5780	MSR 9 long	2 - 6	17	35	12	100
5211 5790	MSR 11 long	3 - 7	20	38	12	50
5211 5800	MSR 13,5 long	4 - 9	22	39,5	12	50
5211 5810	MSR 16 long	6 - 13	24	40,5	12	50
5211 5820	MSR 21 long	8 - 16	30	45	12	25
5211 5830	MSR 29 long	10,5 - 20	40	52	15	25