



1. Mechanical Dimensions:

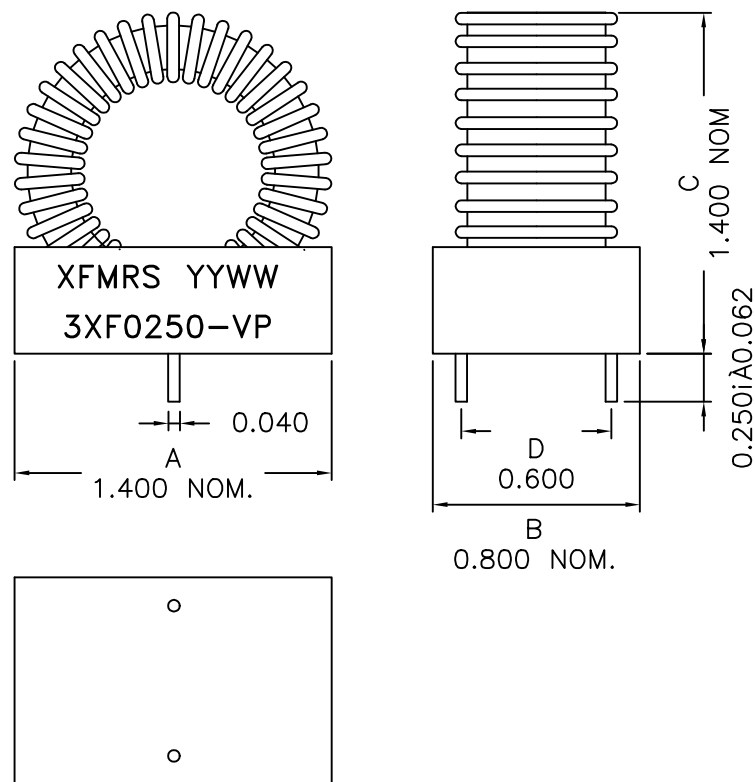

Note:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0,
3. ASTM oxygen index: > 28% ,
4. Temperature rating: 155°C. UL file E151556,
5. Operating Temperature Range: 0°C to +70°C

2. Schematic:



3. Electrical Specifications: @25°C

OCL: 250uH±10% @1.0KHz 1.0V

Current Rating: 3.0ADC Maximum 15% drop in OCL

DC Resistance: 0.070 Ohms Maximum

DOC. REV A/2

XFMR5 Inc		Title: TOROIDAL INDUCTOR		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH		P/N: 3XF0250-VP		REV A
		DWN.	李小锋	JUN-05-01
		CHK.	廖玉坤	JUN-05-01
SHEET 1 OF 1		APP.	BW	JUN-05-01