
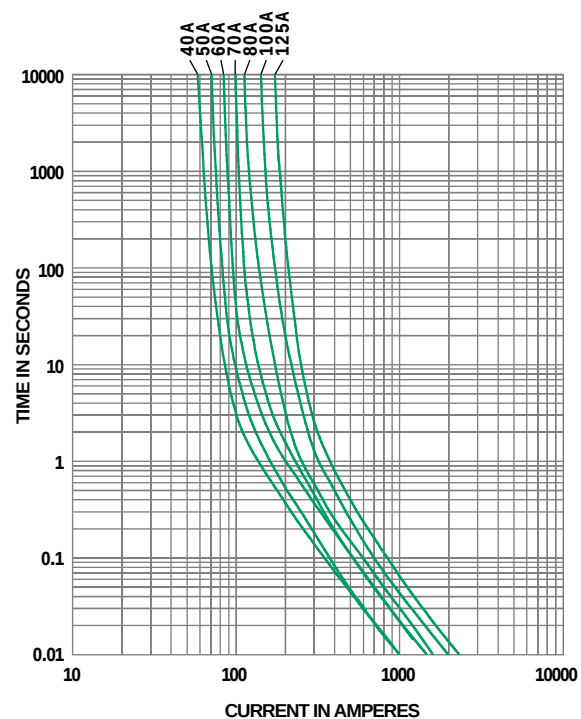


MIDI® Fuse

The MIDI® Fuse offers a bolt-on space saving fuse for high current wiring protection and provides time delay characteristics with "Diffusion Pill Technology". The MIDI Fuse was designed and patented by Littelfuse.

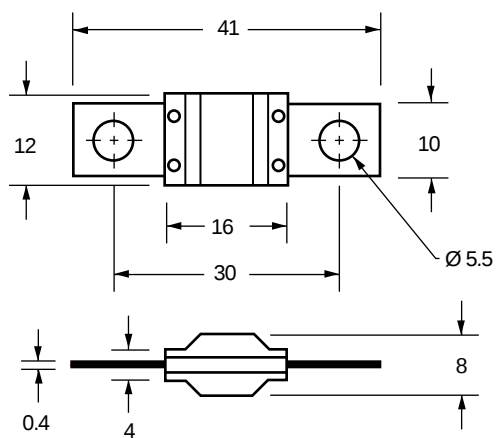

TIME-CURRENT CHARACTERISTICS

% of Rating	Opening Time	
	Minimum	Maximum
100	100 hrs.	
110	4 hrs.	
150	90 s	3600 s
200	5 s	100 s
300	0.5 s	15 s

Interrupting Rating: 1000A @ 32 VDC

Voltage Rating: 32 VDC

Ambient Temp.: -40°C to +125°C

MIDI® FUSE TABLE

Part Number	Current Rating (A)	Nom. Cold Resistance (mΩ)	Typ. Voltage Drop at Rated Current (mV)
498040	40	1.3	65
498050	50	1.04	65
498060	60	0.87	68
498070	70	0.72	70
498080	80	0.56	58
498100	100	0.45	60
498125	125	0.40	71
498150	150	0.33	77

MIDI Fuse Temperature Derating Curve

