

328 – 865 | SIP industrial generators Medusa





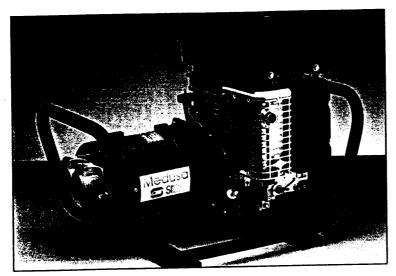






Alternators used are self exciting heavy duty, maintenance free, highly reliable, brushless (115 / 230V) units fitted with twin outlet sockets and overload

Engines used are Briggs & Stratton new Industrial Plus or Vanguard units. Both ranges boast electronic ignition and low oil shutdown. All meet strict EEC noise and safety regulations.

The Industrial Plus range feature easy one pull first time starting, large fuel tank and air cleaner. Cast iron cylinder sleeve ensures longer life.







	FIRST PULL	
	EASY	
	START	
	ENGINES	
MODEL	MGIP 1.5 H	M
 	0.4500	

MGIP 5.0 F	MGIP 3.5 F	MGVG 2.5 F	MGIP 2.2 F	MGIP 2.2 H	MGIP 1.5 F	MGIP 1.5 H	MODEL
04520	04510	04508	04506	04505	04502		
5.0	3.5	2.5	2.2	2.2		04500	ITEM NO
115/230	115 / 230	115 / 230			1.5	1.5	MAX. OUTPUT KVA
			115 / 230	115 / 230	115 / 230	115 / 230	VOLTAGE
FULL	FULL	FULL	FULL	HALF	FULL	HALF	FRAME
<u>VP</u>	I/P	V/G	VP	VP	VP.	VP.	ENGINE
11.0	8.0	5.5	5.0	5.0	3.5		
3.8	3.8	4.0				3.5	HP HP
			3.8	3.8	3.8	3.8	FUEL TANK CAP LTRS
2.4	2.5	2.8	2.4	2.4	2.4	2.4	APPROX RUNNING TIME HRS
		•					LOW OIL SHUTDOWN
540x510x750	540x510x750	540x610x750	540x510x750	506x380x666	540 540 350		
71	51				540x510x750	385x380x666	PACKED DIM. (HxWxL) MM
		42	38	36	31	29	WEIGHT KGS

VP = INDUSTRIAL PLUS V/G = VANGUARD



