



# PROFESSIONAL PANEL SOCKET (443 RANGE)

Sheet No. **PS 0461**

Date : 01.09.94

Issue No. 3 (17.03.97)


Sheet 1 of 1

Signature

## PRODUCT SPECIFICATION

Deltron Part No.	NICKEL	GOLD
BLACK	431-0100	432-0100
RED	431-0500	432-0500

## Dimensions

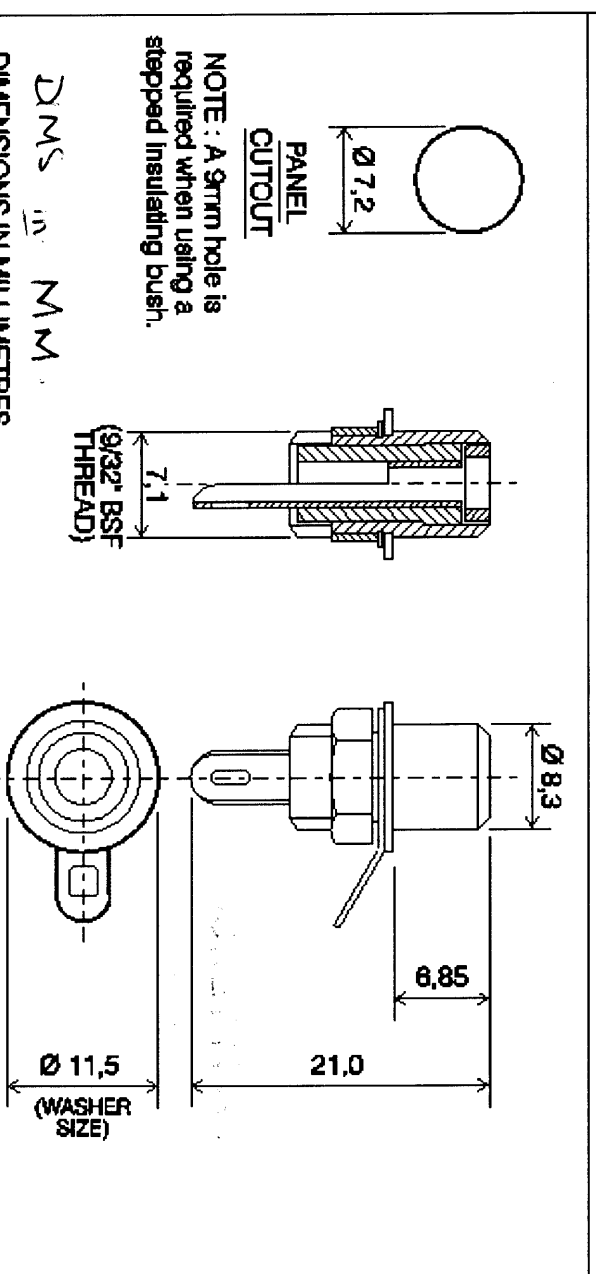

Description	Features
<p>A turned brass single nut fixing panel socket available in nickel or gold plated finish. A choice of red or black insulator is useful for identification purposes.</p> <ul style="list-style-type: none"> <li>- single nut fixing makes these adaptable sockets suitable for stacking adjacent to one another.</li> <li>- thermoplastic insulated.</li> <li>- maximum panel thickness 3mm.</li> <li>- mounting hole 7,2mm diameter.</li> <li>- a panel isolating kit is also available (comprising of a plain and stepped washer).</li> </ul>	<p><b>MATERIAL</b></p> <p><b>HOUSING</b> : Brass, gold flash (0,05mm) or nickel plate</p> <p><b>SOCKET</b> : Brass, silver plate</p> <p><b>INSULATION</b> : Acetal</p> <p><b>NUT</b> : Brass, gold flash (0,05mm) or nickel plate</p> <p><b>SOLDER TAG</b> : Brass, gold flash (0,05mm) or tin lead plate</p> <p><b>WASHER</b> : Noryl, black or red</p> <p><b>RATINGS</b> : 5 Amps at 200 Vdc / 150 Vac max</p> <p><b>INSULATION</b> : 100 M<math>\Omega</math> at 500 Vdc</p> <p><b>RESISTANCE</b></p>

Request A Product Sample

This website is copyright Deltron Emcon 2001©  
if you have any comments or suggestions please contact  
[sales@deltron-emcon.com](mailto:sales@deltron-emcon.com)