

ALL INSERTS ARE NICKEL PLATED BRASS WHILE SCREWS ARE NICKEL
 CADMIUM PLATED STEEL AND ARE CAPTIVE WITHIN THE CHIMNEYS
 CREEPAGE AND CLEARANCE DISTANCES ARE MEASURED IN ACCORDANCE WITH
 BRITISH AND INTERNATIONAL STANDARDS.
 APPLICATIONS - AREA WHERE INSITU ISOLATION OF EQUIPMENT IS
 REQUIRED I.E. CHASSIS OF LIGHT FITTINGS ENABLING EASY REMOVAL
 AND MAINTENANCE

FEATURES: SPLIT SOCKET, SHROUDED, RAISED BASE
 NON-REVERSIBLE
MATERIAL: NYLON 6 (110°C)
CURRENT RATING: 10A 2.5" CEE REC 2 GROUP 2
FEATURES: SOLID PLUG, RAISED BASE
MATERIAL: NYLON 6 (110°C)
DIMENSIONS: AS PER DRAWING

SOCKET 4212-2
 PLUG 4212-1/22


NYLON PLUG & SOCKET

Order Code 152-574

Farnell
 Technical
 Data
 Service



1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

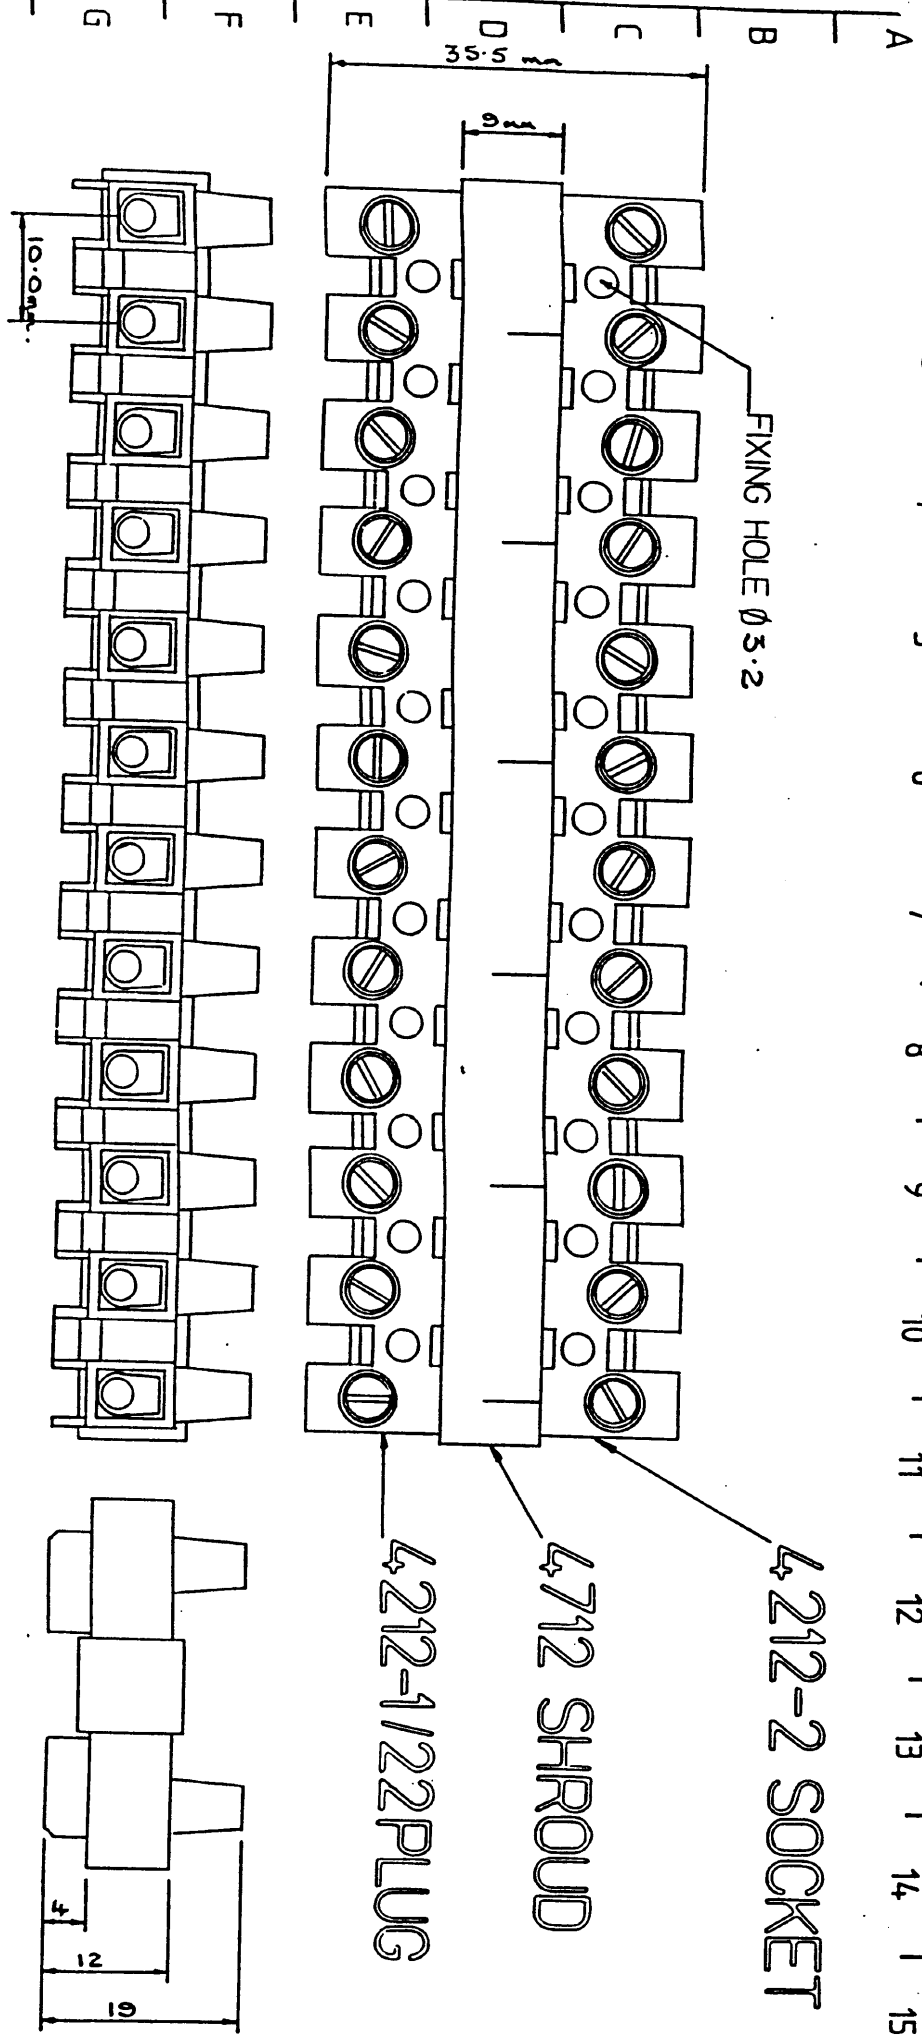

UNCONTROLLED
COPY

1	SOCKET 4212-2	NYLON 6	1027000
1	SHROUD 4712	NYLON 6	1022000
1	PLUG 4212 1/22	NYLON 6	1025000
PROJECT FARNELL		ITEM NO.	Drawing No.
TITLE		SCALE 2:1	DATE 27/1/90
4212 [FARNELL]		TOLERANCE	OVER / TO - +/-
		OVER / TO - +/-	0.00/5.00 - 0.05
		15.00/25.00 - 0.10	
		25.00/50.00 - 0.20	
REVISION RECORD		50.00/100.00 - 0.25	
		CHECKED BY BM	APPROVED
		DRAWING NO. 000165	REV. 0

All rights concerning this drawing are owned by CONRAD and must not be shown or used without written permission