


MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.

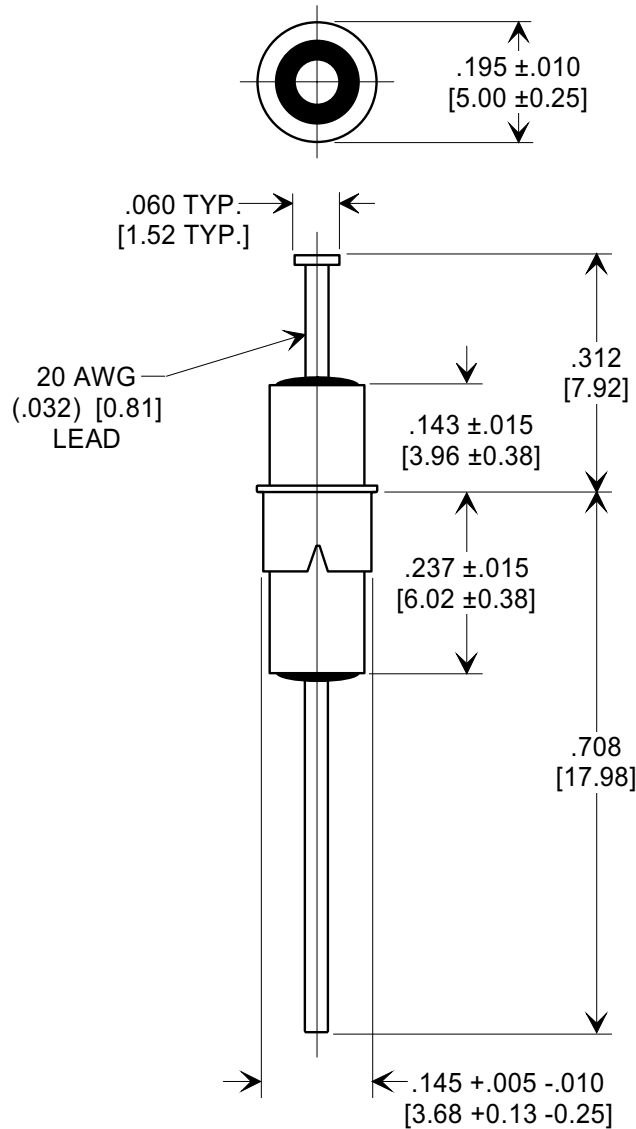

MIN. CAP (pF)	WORKING VOLTAGE (WVDC)		CURRENT Idc	MINIMUM NO-LOAD INSERTION LOSS (dB) AT 25°C PER MIL-STD-220			
	85°C	125°C		10 MHz	100 MHz	1 GHz	10 GHz
5500	200 VDC	200 VDC	10A	14	55	70	70

X-2015 Rev-0	REVISION RECORD				--TOLERANCES-- Unless Otherwise Specified		Title EYELET STYLE EMI FILTER			
	0	Original Release C.O.	CHANGED TOL. +.005, -.010 WAS ±.010, 200 VDC WAS 140 & 70. E.C. 11-05-87		DECIMAL ± .031 [79]		Drawn S.M. 01-19-00		Scale 4 X	
	1		WAS SK6848-000-S ADDED .060 TYP DIM. E.C. 11-23-87		ANGLES ± 		Approved T.C. 01-19-00			
	2	3643	DWG. # WAS 4101-008-000-S. E.C. 01-21-88		TUSONIX TUCSON, ARIZONA		A		4101-008	
	3	4301	RDN TO COMP FMT. & ADDED METRIC. DIM. 143 WAS .156 & DIM .237 WAS .250. DELETED S. WASHERS. S.M. 01-19-00							
	4	20000120-1-01								