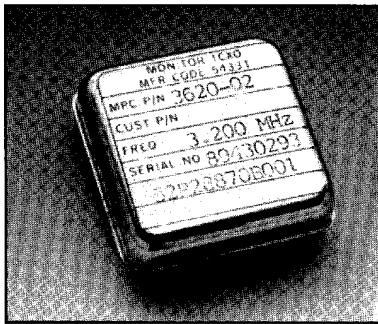
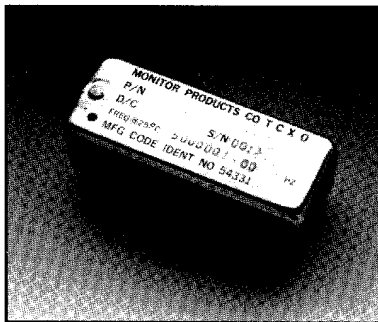
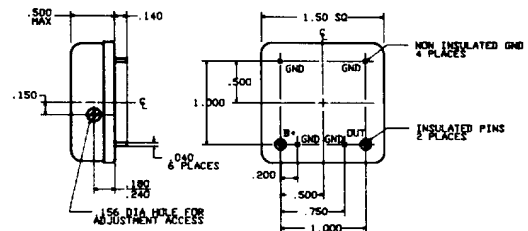



TCXO PRODUCTS

**3620**



Frequency Range: 3MHz - 20MHz
 Frequency Stability: ± 2 ppm
 Operating Temperature Range: -20°C to +70°C
 Input Voltage: 12VDC
 Input Current: 20mA
 Output Waveform: TTL Compatible
 Features: Ruggedized TCXO

**7191**

Frequency Range: 4MHz - 10MHz
 Frequency Stability: ± 0.5 ppm
 Operating Temperature Range: -45°C to +85°C
 Input Voltage: 12VDC
 Input Current: 10mA
 Output Waveform: Sine Wave
 Features: Ruggedized,
 Hermetically Sealed
 External Trim Capability

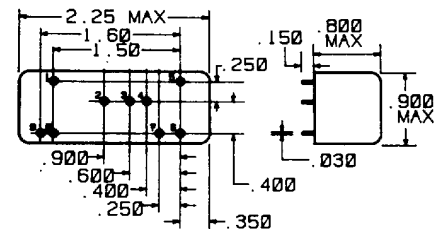**7279**

Frequency Range: 6MHz - 20MHz
 Frequency Stability: ± 3 ppm
 Operating Temperature Range: -20°C to +75°C
 Input Voltage: 15VDC
 Input Current: 5mA
 Output Waveform: HCMOS Compatible
 Features: Extreme low profile TCXO
 External trim capability

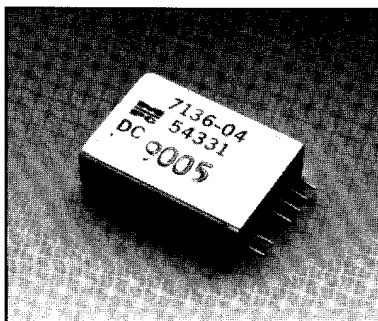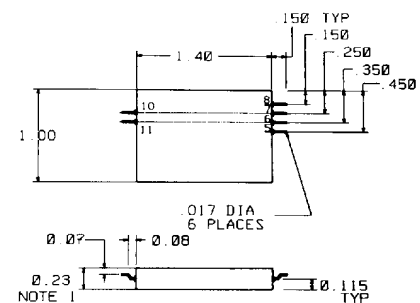**7136**

Frequency Range: 25MHz - 75MHz
 Frequency Stability: ± 4 ppm
 Operating Temperature Range: -40°C to +75°C
 Input Voltage: 5.5V/13.5V
 Input Current: 5mA
 Output Waveform: Sine Wave
 Features: Hybrid TCXO,
 Hermetically sealed
 External trim capability

