



DIMENSIONS IN MM

525 560

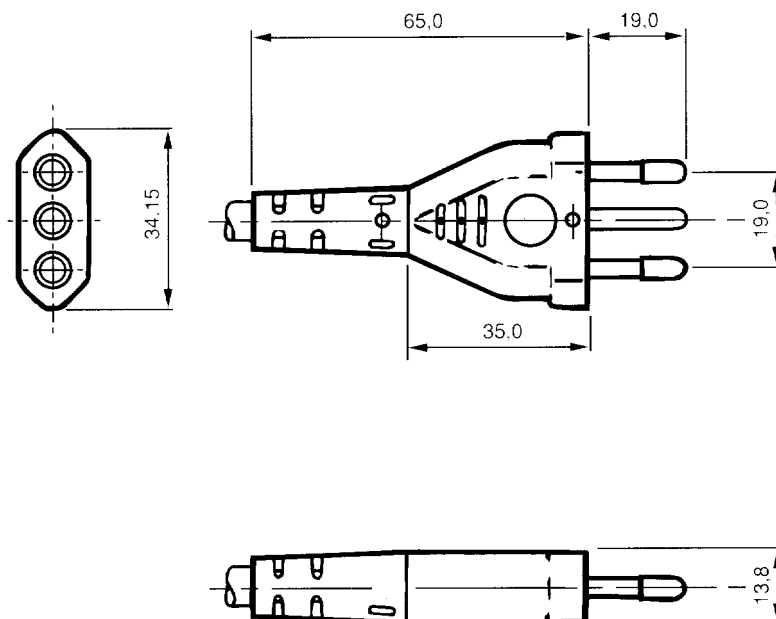

10 AMP 250V 3 PIN PLUG. TYPE No. ID10A

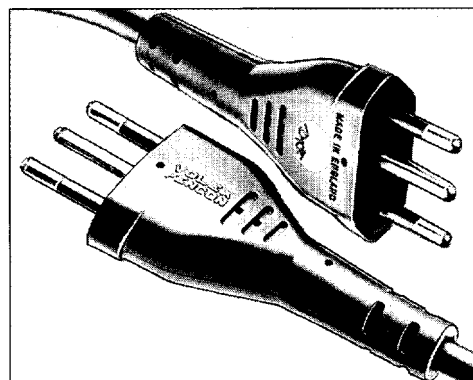

PRODUCT SPECIFICATION

Specification	CEI 23-16
Operating Voltage	250V. a.c.
Current Rating	10 Amp
Insulation Resistance	>10 M ohms
Cable Retention	>60N
Outside Body	P.V.C.
Terminals	Brass-Nickel Plated
Flexible Cords	See Appendix
Approvals	See Appendix

TEST SPECIFICATION

Each plug is 100% tested to the following:

Earth Continuity	25A
Polarity	
Insulation Resistance L-N	500V. d.c.
Electrical Strength L-N	2.4kV. 50Hz.
Insulation Resistance L-N-E	500V. d.c.
Electrical Strength L-N-E	2.4kV. 50Hz.
Safety Test	4.4kV. 50Hz.



10 AMP 250V 3 PIN PLUG

Designed to suit the electrical socket system in use in Italy the Pencon moulded plug complies with the requirements of Italian Standard CEI 23-16.

The plug is available either double insulated (Type no. ID 10A) as illustrated or single insulated (Type no. IS 10A).

All wire connections are crimped for greater safety and reliability.

Each plug undergoes seven electrical tests to ensure correct continuity, polarity and electrical safety.

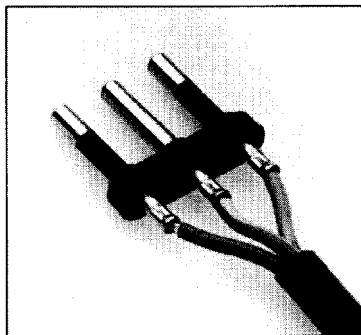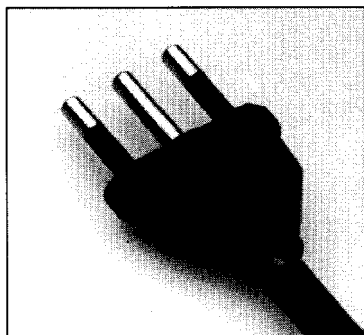

The Manufacturers reserve the right to alter specifications without notice.

PENCON

A division of the Volex Group p.l.c.