

SPECIFICATION

DEVICE NAME : Power MOSFET

TYPE NAME : 2SJ473-01L,S

SPEC. NO. :

Fuji Electric Co.,Ltd.

This Specification is subject to change without notice.

	DATE	NAME	APPROVED		Fuji Electric Co.,Ltd.	
DRAWN					DWG. NO.	1/13
CHECKED						

1.Scope This specifies Fuji Power MOSFET 2SJ473-01L,S

2.Construction P-Channel enhancement mode power MOSFET

3.Applications for Switching

4.Outview K-Pack L-Type : Outview See to 5/13 page
S-Type : Outview See to 6/13 page

5.Absolute Maximum Ratings at Tc=25°C (unless otherwise specified)

Description	Symbol	Characteristics	Unit	Remarks
Drain-Source Voltage	V_{DS}	-60	V	
Continuous Drain Current	I_D	± 7	A	
Pulsed Drain Current	I_{DP}	± 28	A	
Gate-Source Voltage	V_{GS}	± 20	V	
Maximum Avalanche Energy	E_{AV}	141.8	mJ	*1
Maximum Power Dissipation	P_D	20	W	
Operating and Storage	T_{ch}	150	°C	
Temperature range	T_{stg}	-55 to +150	°C	

*1 L=3.86mH, Vcc=-24V

6.Electrical Characteristics at Tc=25°C (unless otherwise specified)

Static Ratings

Description	Symbol	Conditions	min.	typ.	max.	Unit
Drain-Source Breakdown Voltage	BV_{DSS}	$I_D = -1mA$ $V_{GS} = 0V$	-60			V
Gate Threshold Voltage	$V_{GS(th)}$	$I_D = -1mA$ $V_{DS} = V_{GS}$	-1.0	-1.5	-2.5	V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = -60V$ $V_{GS} = 0V$	$T_{ch} = 25^\circ C$ $T_{ch} = 125^\circ C$	-10 -0.2	-500 -1.0	μA mA
Gate-Source Leakage Current	I_{GSS}	$V_{GS} = \pm 20V$ $V_{DS} = 0V$		10	100	nA
Drain-Source On-State Resistance	$R_{DS(on)}$	$I_D = -3.5A$ $V_{GS} = -4V$ $V_{GS} = -10V$		260 150	350 200	$m\Omega$

Dynamic Ratings

Description	Symbol	Conditions	min.	typ.	max.	Unit
Forward Transconductance	g_{fs}	$I_D = -3.5A$ $V_{DS} = -25V$	2.5	5.0		S
Input Capacitance	C_{iss}	$V_{DS} = -25V$ $V_{GS} = 0V$ $f = 1MHz$		550	830	pF
Output Capacitance	C_{oss}			200	300	
Reverse Transfer Capacitance	C_{rss}			110	170	
Turn-On Time	$t_d(on)$	$V_{cc} = -30V$		10	15	ns
	t_r	$V_{GS} = -10V$		20	30	
Turn-Off Time	$t_d(off)$	$I_D = -7A$		60	90	
	t_f	$R_{GS} = 10\Omega$		25	50	

Reverse Diode

Description	Symbol	Conditions	min.	typ.	max.	Unit
Avalanche Capability	I_{AV}	$L = 100\mu H$ $T_{ch} = 25^\circ C$ See Fig.1 and Fig.2	-7			A
Diode Forward On-Voltage	V_{SD}	$I_F = 2 \times I_{DR}$ $V_{GS} = 0V$ $T_{ch} = 25^\circ C$		-2.5	-3.8	V
Reverse Recovery Time	t_{rr}	$I_F = I_{DR}$		110		ns
Reverse Recovery Charge	Q_{rr}	$di/dt = 100A/\mu s$ $T_{ch} = 25^\circ C$		0.5		μC

7. Thermal Resistance

Description	Symbol	min.	typ.	max.	Unit
Channel to Case	$R_{th(ch-c)}$			6.25	$^\circ C/W$
Channel to Ambient	$R_{th(ch-a)}$			150	$^\circ C/W$

Fig.1 Test circuit



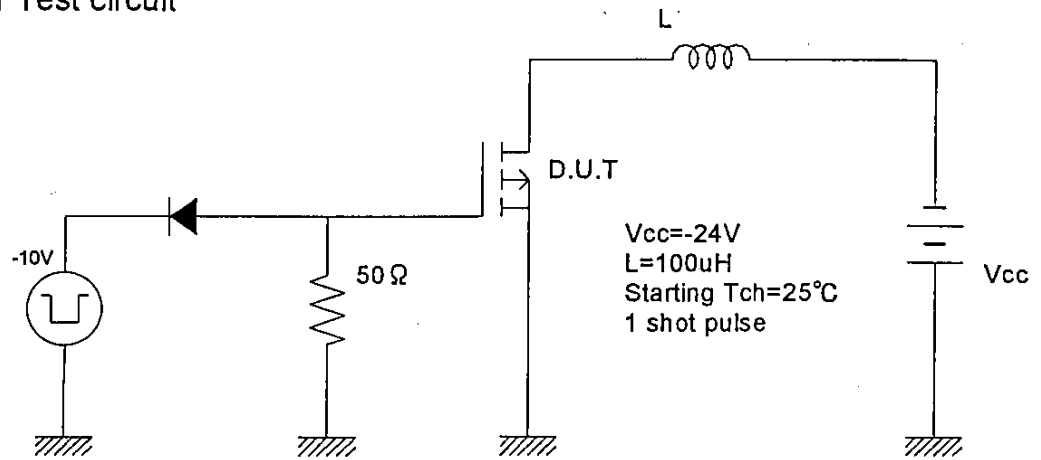


Fig.2 Operating waveforms

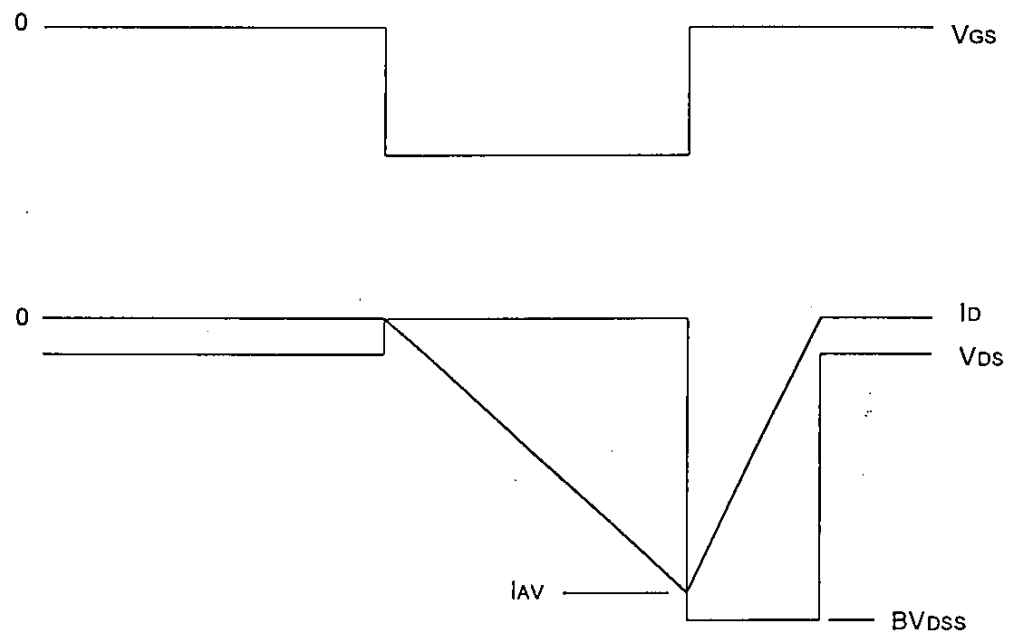

MOSFET Type : 2SJ473-01L

OUT VIEW

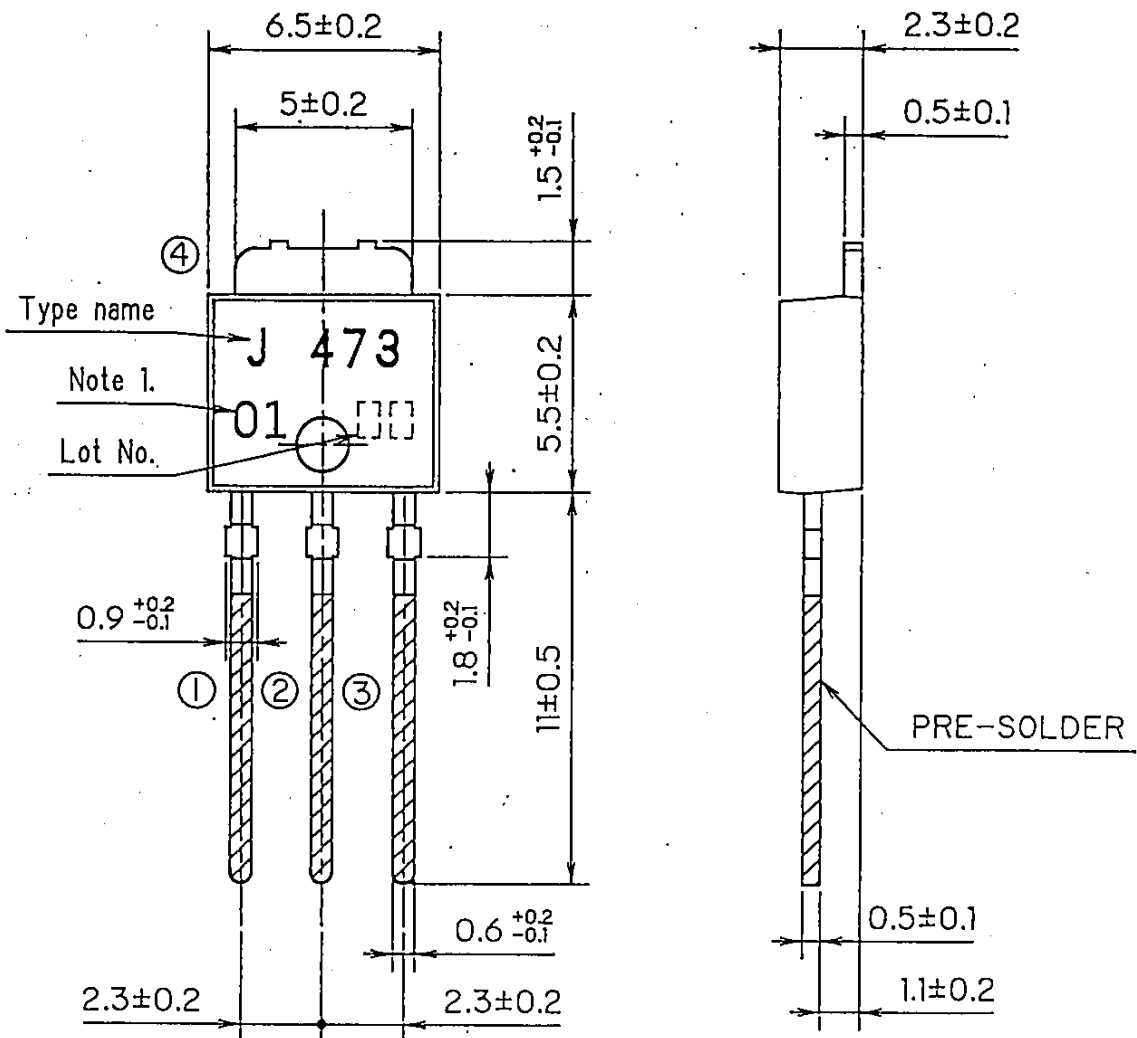

CONNECTION

- ① GATE
- ②④ DRAIN
- ③ SOURCE


JEDEC:TO-252
EIAJ:SC-64

Note 1. Guaranteed mark of avalanche ruggedness.


DIMENSIONS ARE IN MILLIMETERS.

MOSFET Type : 2SJ473-01S

OUT VIEW

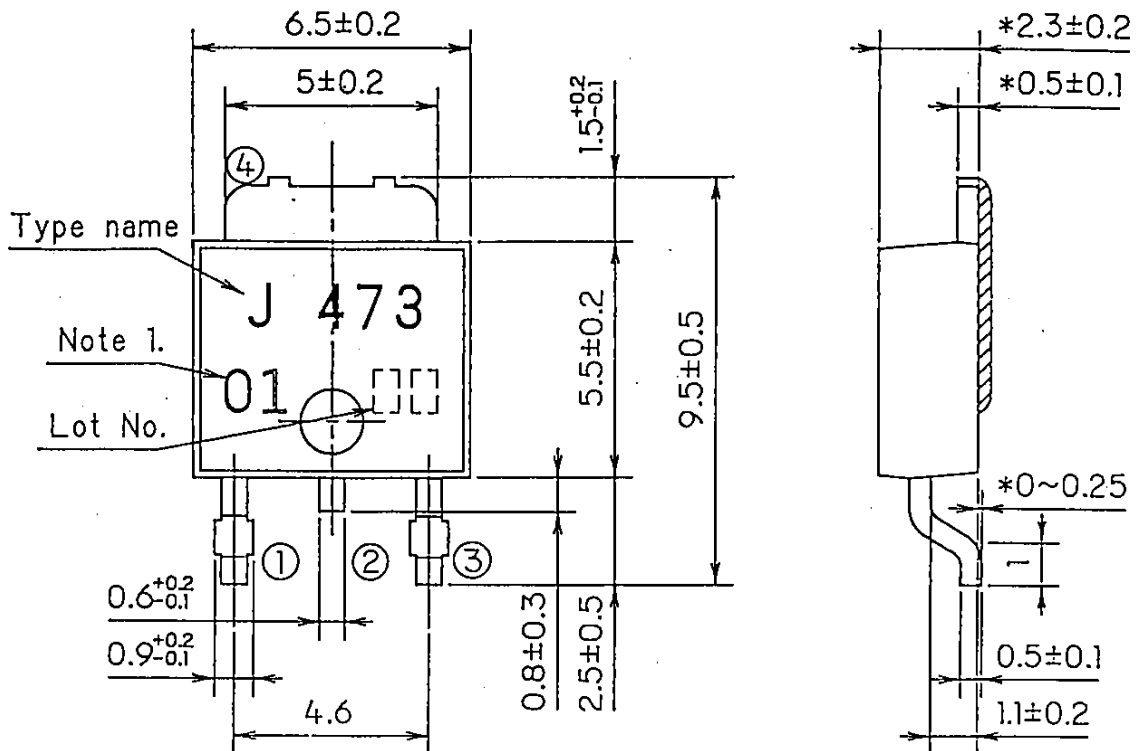

BACK VIEW

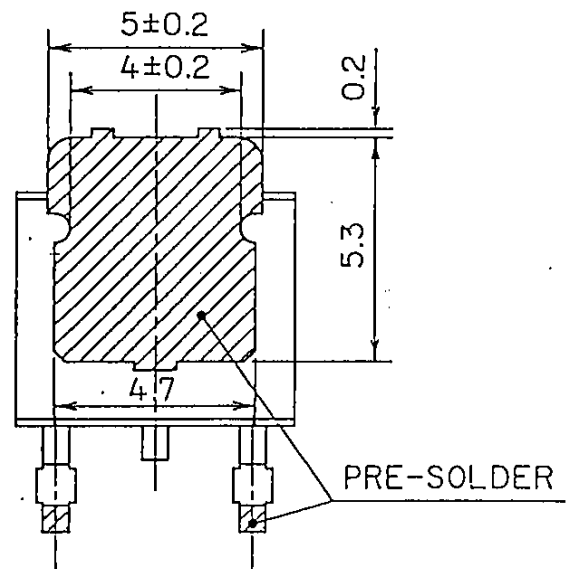

CONNECTION

- ① GATE
- ②④ DRAIN
- ③ SOURCE


JEDEC:TO-252
EIAJ:SC-63

Dimension of * marks are excluded the thickness solder.


Note 1. Guaranteed mark of avalanche ruggedness.

DIMENSIONS ARE IN MILLIMETERS.


Power Dissipation $PD=f(T_c)$

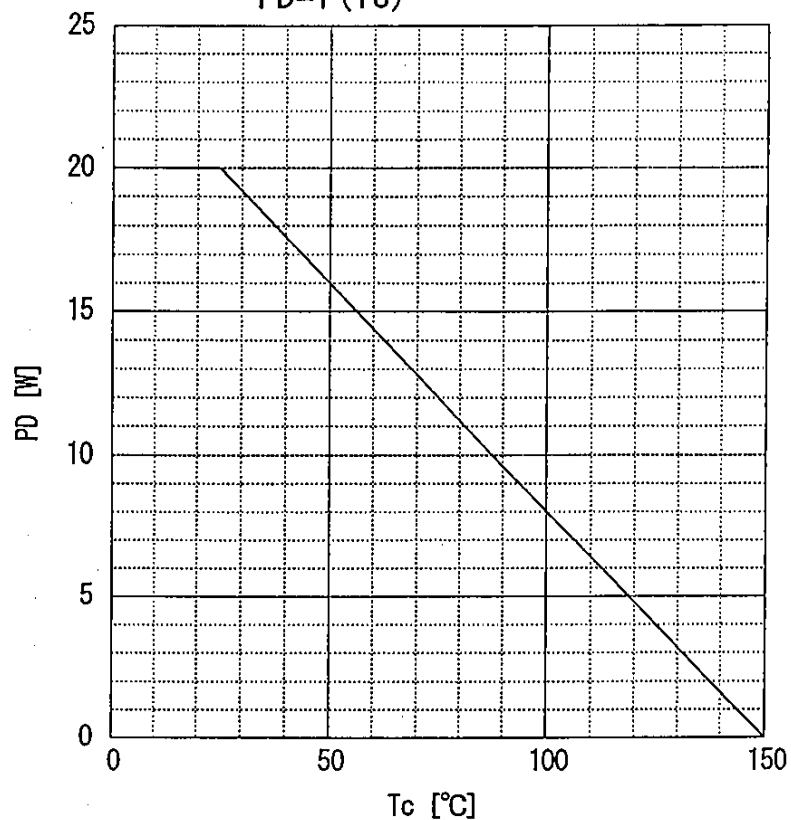


Safe operating area $ID=f(V_{DS}) : D=0.01, T_c=25^\circ\text{C}$

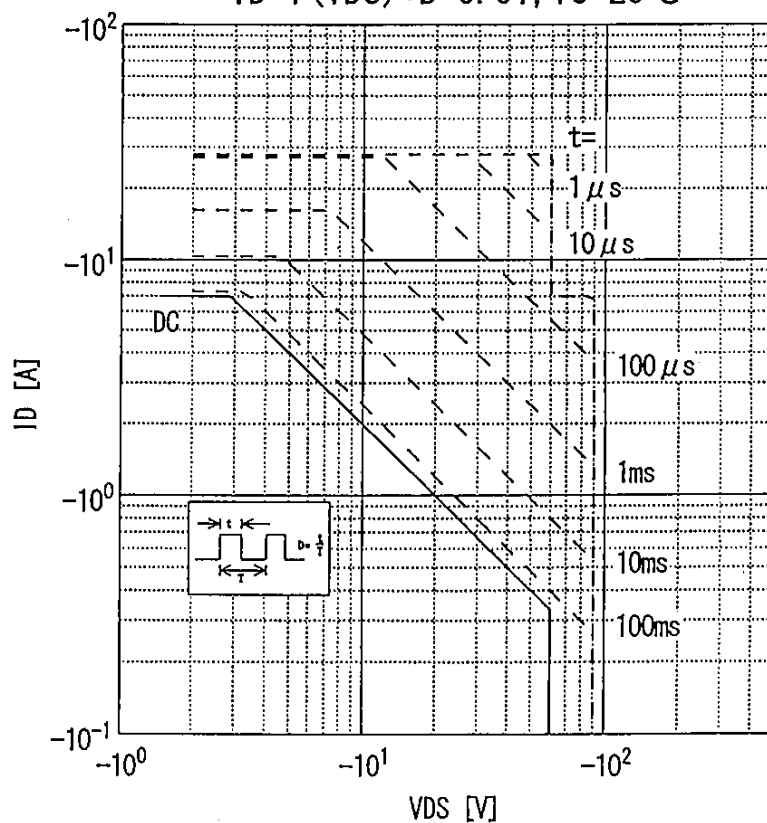

Typical output characteristics
 $I_D = f(V_{DS}) : 80 \mu s$ pulse test, $T_c = 25^\circ C$

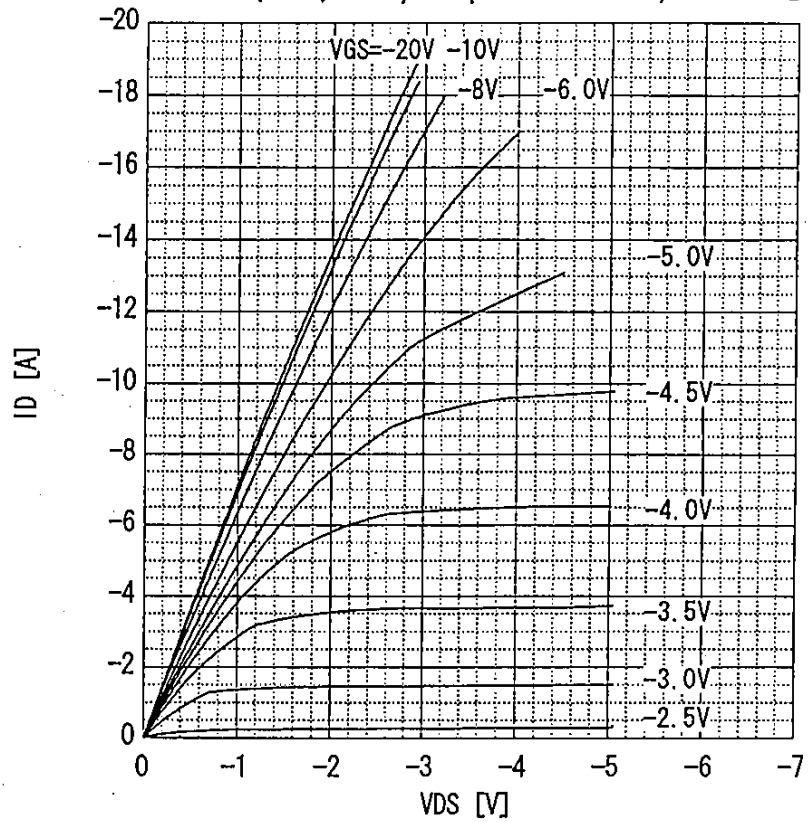


Typical transfer characteristic
 $I_D = f(V_{GS}) : 80 \mu s$ pulse test, $V_{DS} = -25V$, $T_{ch} = 25^\circ C$

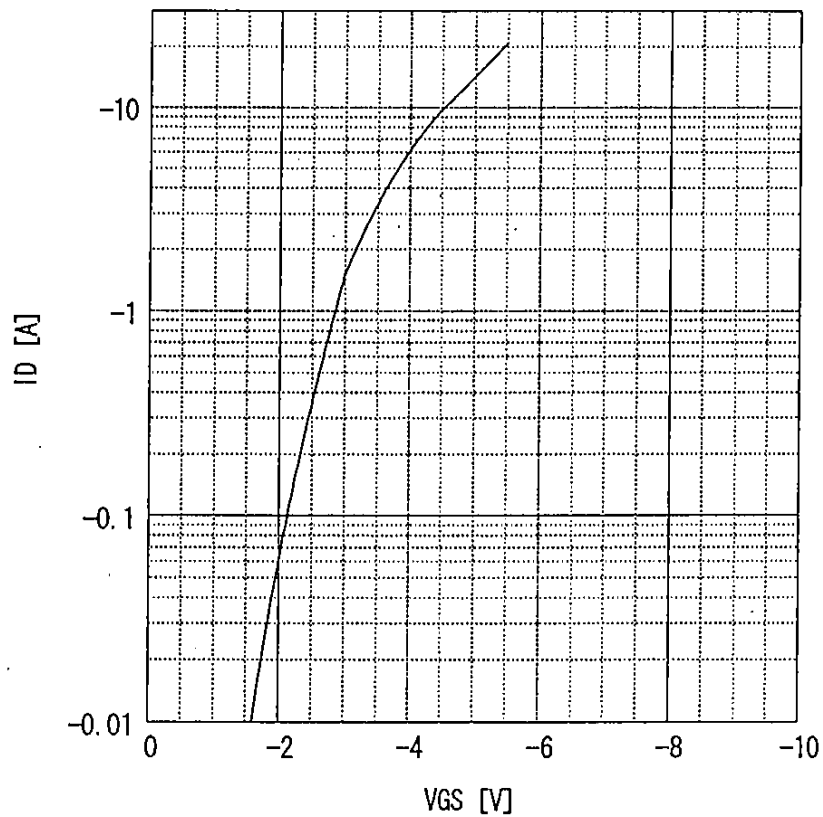


Typical forward transconductance

$g_{fs}=f(I_D)$: 80 μ s pulse test, $V_{DS}=-25V$, $T_{ch}=25^\circ C$

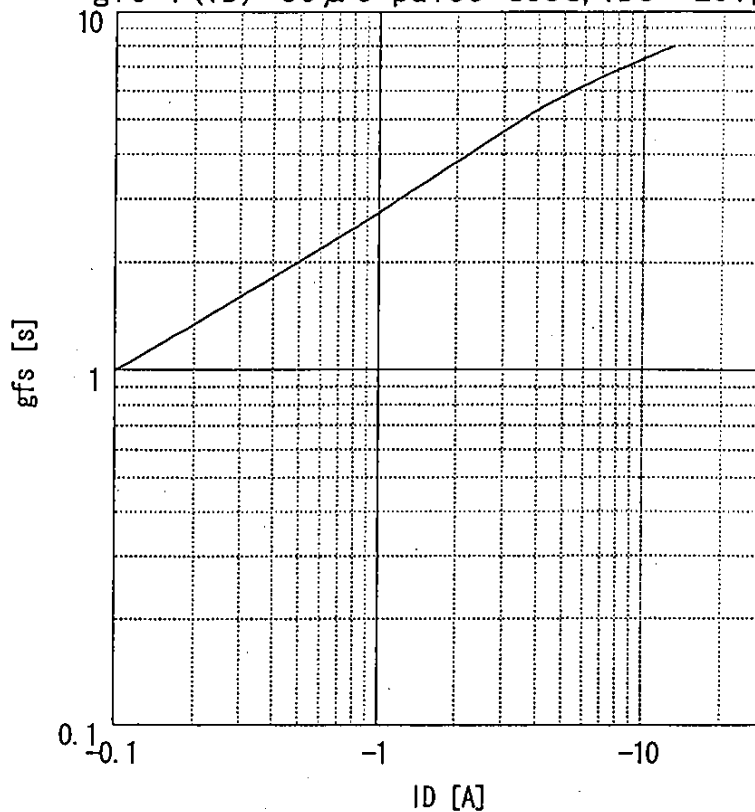


Typical drain-source on-state resistance

$R_{DS(on)}=f(I_D)$: 80 μ s pulse test, $T_c=25^\circ C$

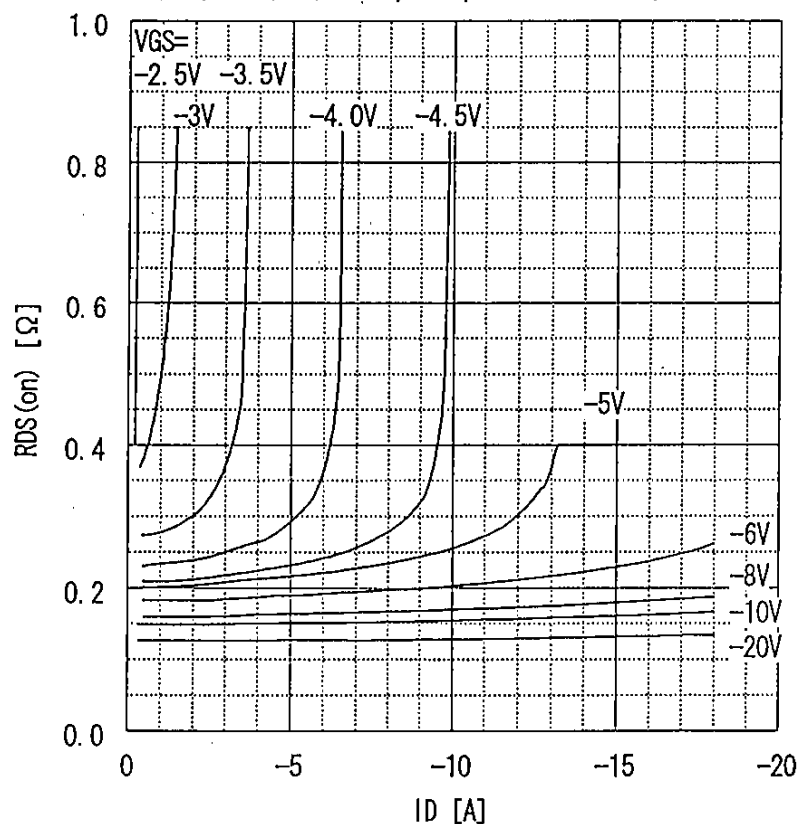


Drain-source on-state resistance

$R_{DS(on)} = f(T_{ch}) : I_D = -3.5A, V_{GS} = 10V$

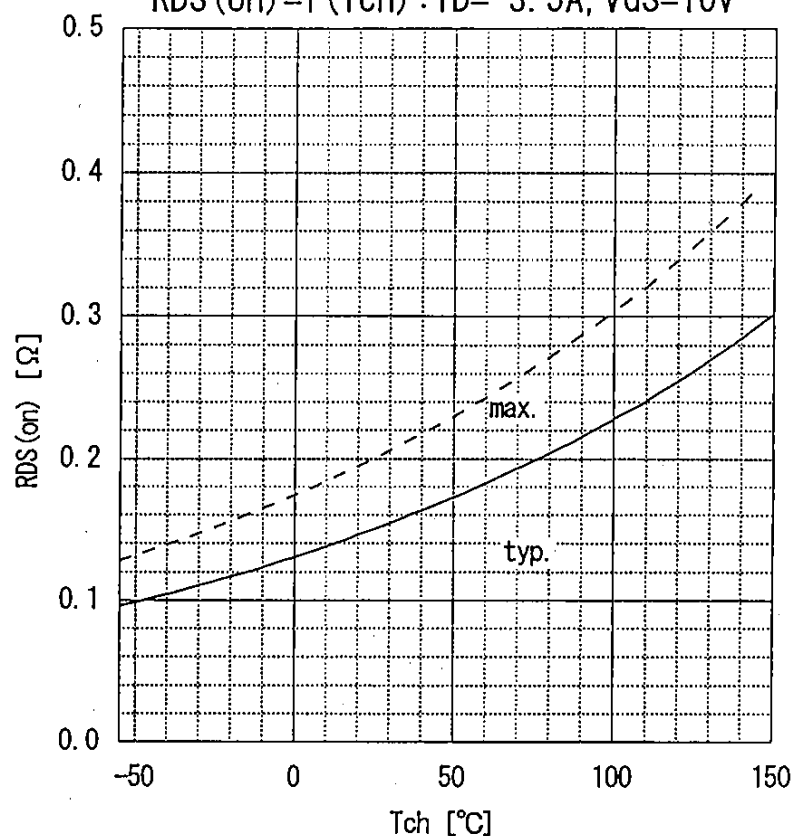


Gate threshold voltage


$V_{GS(th)} = f(T_{ch}) : I_D = -1mA, V_{DS} = V_{GS}$

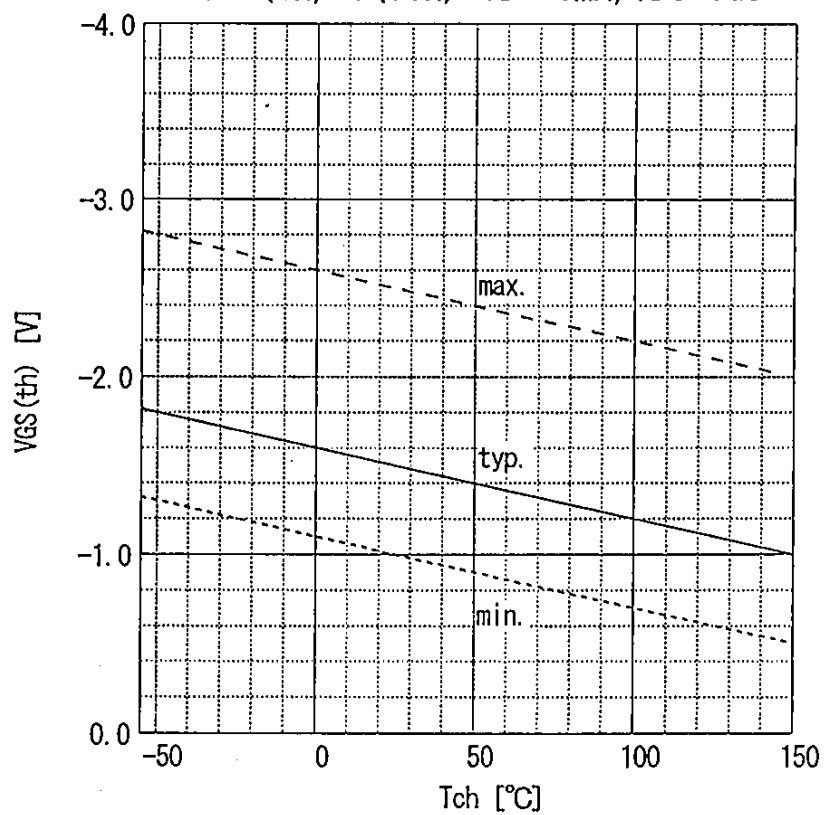


Typical gate charge characteristic
 $V_{GS}=f(Q_g) : I_D=-7A, T_c=25^\circ C$

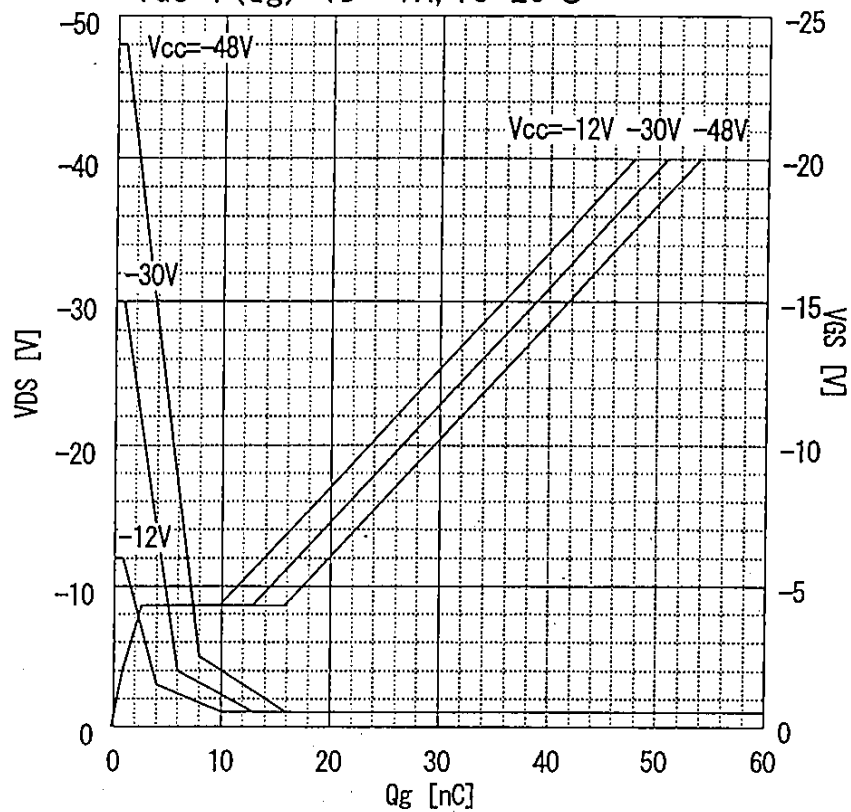


Typical capacitances
 $C=f(V_{DS}) : V_{GS}=0V, f=1MHz$

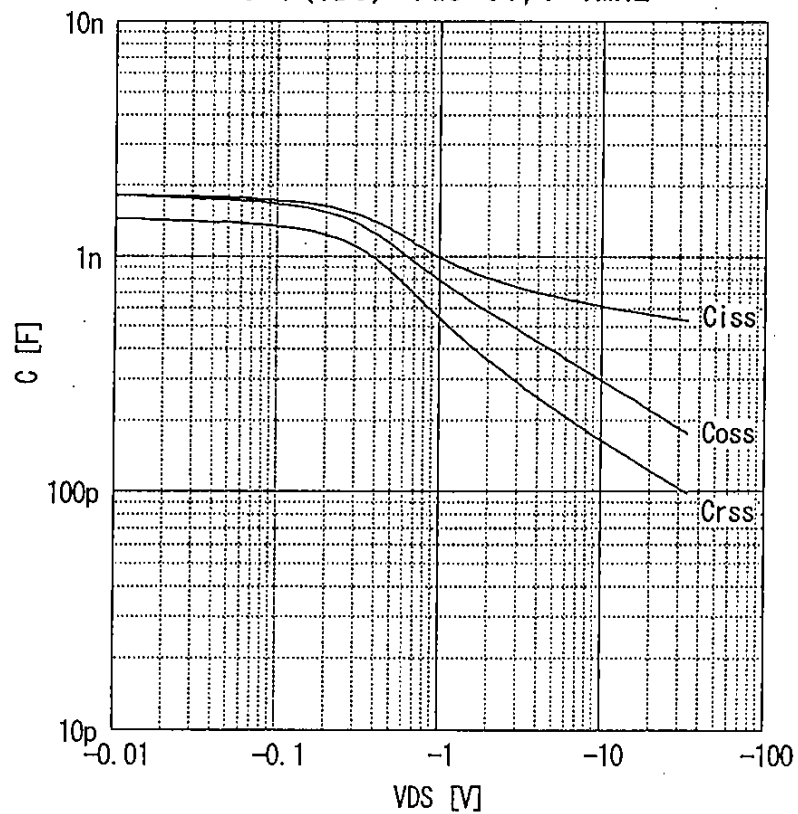


Maximum Avalanche Current vs. starting Tch
 $I(AV)=f(\text{starting Tch})$

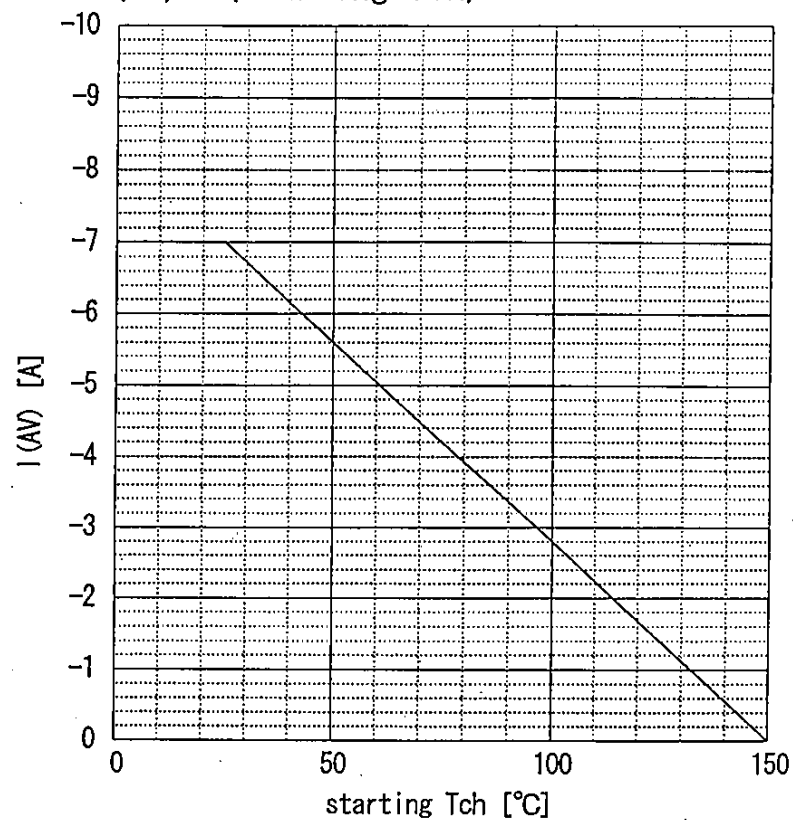

Maximum Avalanche Energy vs. starting Tch
 $E(AV)=f(\text{starting Tch}) : V_{CC}=-24V, I(AV) \geq -7A$

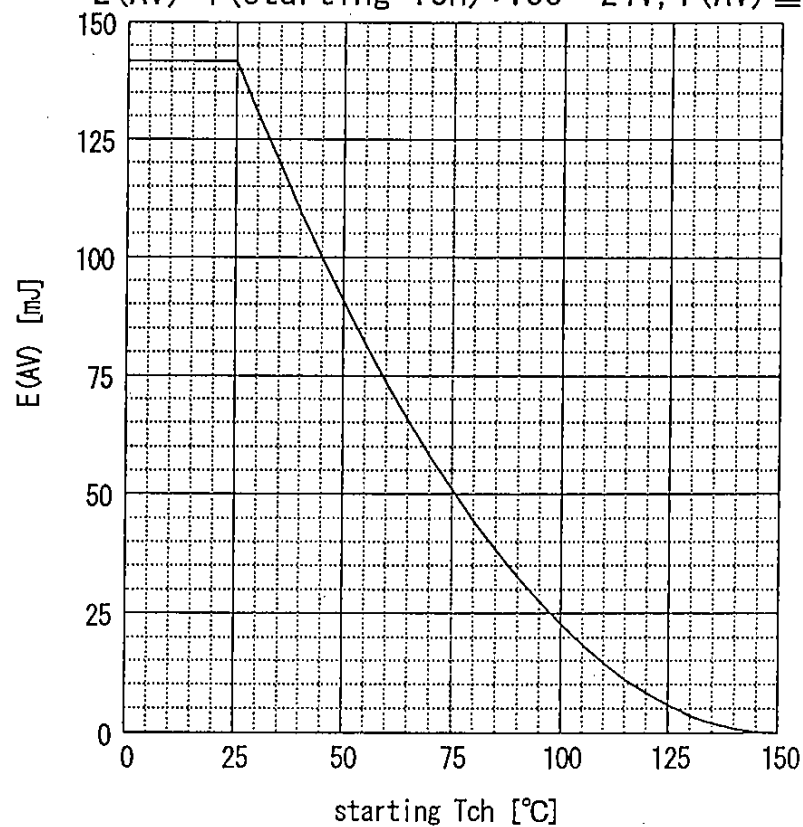

Forward characteristic of reverse of diode
 $I_F = f(V_{SD})$: 80 μ s pulses test, $V_{GS} = 0V$

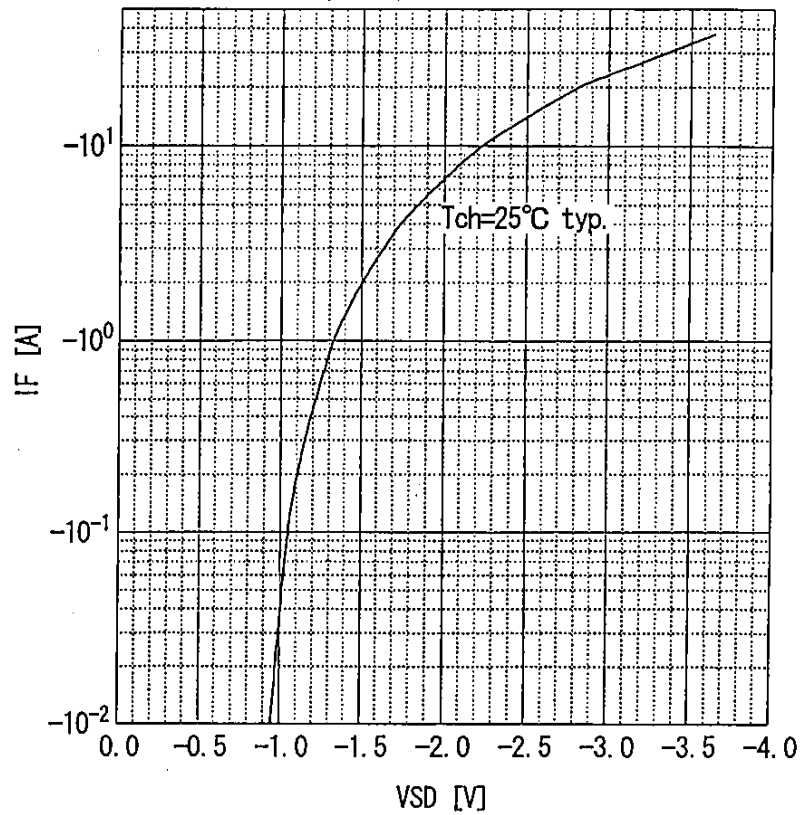

Transient thermal impedance
 $Z_{thch} = f(t)$ parameter: $D = t/T$

