

SANYO

No.3332

2SC4461

NPN Triple Diffused Planar Silicon Transistor

500V/25A Switching Regulator Applications**Features**

- High breakdown voltage, high reliability
- Fast switching speed
- Wide ASO
- Adoption of MBIT process
- Micaless package facilitating mounting

Absolute Maximum Ratings at $T_a = 25^\circ\text{C}$

Collector-to-Base Voltage	V_{CBO}	800	V
Collector-to-Emitter Voltage	V_{CEO}	500	V
Emitter-to-Base Voltage	V_{EBO}	7	V
Collector Current	I_C	25	A
Collector Current (Pulse)	I_{CP}	40	A
Base Current	I_B	8	A
Collector Dissipation	P_C	3	W
Junction Temperature	T_j	65	W
Storage Temperature	T_{stg}	150	$^\circ\text{C}$
		-55 to +150	$^\circ\text{C}$

 $PW \leq 300 \mu\text{s}, \text{duty cycle} \leq 10\%$ $T_c = 25^\circ\text{C}$ **Electrical Characteristics at $T_a = 25^\circ\text{C}$**

			min	typ	max	unit
Collector Cutoff Current	I_{CBO}	$V_{CB} = 500\text{V}, I_E = 0$			10	μA
Emitter Cutoff Current	I_{EBO}	$V_{EB} = 5\text{V}, I_C = 0$			10	μA
DC Current Gain	$h_{FE(1)}$	$V_{CE} = 5\text{V}, I_C = 2.4\text{A}$	15※		50※	
	$h_{FE(2)}$	$V_{CE} = 5\text{V}, I_C = 12\text{A}$	8			
Gain-Bandwidth Product	f_T	$V_{CE} = 10\text{V}, I_C = 2.4\text{A}$		18		MHz
Output Capacitance	C_{ob}	$V_{CB} = 10\text{V}, f = 1\text{MHz}$		260		pF
C-E Saturation Voltage	$V_{CE(sat)}$	$I_C = 12\text{A}, I_B = 2.4\text{A}$			1.0	V
B-E Saturation Voltage	$V_{BE(sat)}$	$I_C = 12\text{A}, I_B = 2.4\text{A}$			1.5	V
C-B Breakdown Voltage	$V_{(BR)CBO}$	$I_C = 1\text{mA}, I_E = 0$	800			V
C-E Breakdown Voltage	$V_{(BR)CEO}$	$I_C = 5\text{mA}, R_{BE} = \infty$	500			V
E-B Breakdown Voltage	$V_{(BR)EBO}$	$I_E = 1\text{mA}, I_C = 0$	7			V
C-E Sustain Voltage	$V_{CEX(sus)}$	$I_C = 10\text{A}, I_{B1} = -I_{B2} = 2\text{A},$ $L = 200 \mu\text{H}, \text{clamped}$	500			V


Continued on next page.

※ : For the $h_{FE(1)}$ of the 2SC4461, specify two ranks or more in principle.

15 L 30	20 M 40	30 N 50
---------	---------	---------

Package Dimensions 2039D

(unit : mm)

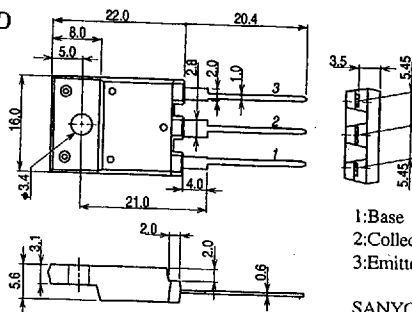

1:Base
2:Collector
3:Emitter

SANYO:TO3PML

SANYO Electric Co., Ltd. Semiconductor Business Headquarters
TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110 JAPAN

7190MH, TA(KOTO) No.3332-1/3

7997076 0020218 859

Continued from preceding page.


Turn-ON time
Storage Time
Fall Time

t_{on}
 t_{stg}
 t_f

$V_{CC}=200V$,
 $5I_{B1} = -2.5I_{B2} = I_C = 14A$,
 $R_L = 14.3\Omega$

min.	typ	max	unit
		0.5	μs
		3.0	μs
		0.3	μs

Switching Time Test Circuit

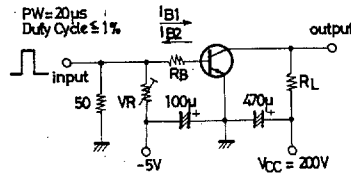Unit (resistance : Ω , capacitance : F)