

2SA1729

T-37-15

2038

PNP Epitaxial Planar Silicon Transistor

High-Speed Switching Applications

©3133

Features

- Adoption of FBET, MBIT processes
- Large current capacity
- Low collector-to-emitter saturation voltage
- Fast switching speed
- Small-sized package

Absolute Maximum Ratings at $T_a = 25^\circ\text{C}$

			unit
Collector to Base Voltage	V_{CBO}	-50	V
Collector to Emitter Voltage	V_{CEO}	-40	V
Emitter to Base Voltage	V_{EBO}	-5	V
Collector Current	I_C	-1.5	A
Peak Collector Current	i_{cp}	-3	A
Collector Dissipation	P_C	1.3	W
Junction Temperature	T_J	150	$^\circ\text{C}$
Storage Temperature	T_{stg}	-55 to +150	$^\circ\text{C}$



Mounted on ceramic board (250mm² × 0.8mm)**Electrical Characteristics at $T_a = 25^\circ\text{C}$**

			min	typ	max	unit
Collector Cutoff Current	I_{CBO}	$V_{CB} = -40\text{V}, I_E = 0$			-1	μA
Emitter Cutoff Current	I_{EBO}	$V_{EB} = -3\text{V}, I_C = 0$			-1	μA
DC Current Gain	$h_{FE}(1)$	$V_{CE} = -2\text{V}, I_C = -100\text{mA}$	70※		280※	
	$h_{FE}(2)$	$V_{CE} = -2\text{V}, I_C = -1.5\text{A}$	25			
Gain-Bandwidth Product	f_T	$V_{CE} = -2\text{V}, I_C = -100\text{mA}$		300		MHz
Output Capacitance	c_{ob}	$V_{CB} = -10\text{V}, f = 1\text{MHz}$		18		pF
C-E Saturation Voltage	$V_{CE(sat)}$	$I_C = -800\text{mA}, I_B = -40\text{mA}$	-0.3	-0.8		V
B-E Saturation Voltage	$V_{BE(sat)}$	$I_C = -800\text{mA}, I_B = -40\text{mA}$	-0.9	-1.3		V
C-B Breakdown Voltage	$V_{(BR)CBO}$	$I_C = -10\mu\text{A}, I_E = 0$	-50			V
C-E Breakdown Voltage	$V_{(BR)CEO}$	$I_C = -1\text{mA}, R_{BE} = \infty$	-40			V
E-B Breakdown Voltage	$V_{(BR)EBO}$	$I_E = -10\mu\text{A}, I_C = 0$	-5			V
Turn-ON Time	t_{on}	See specified Test Circuit.		50	100	ns
Storage Time	t_{stg}	"		120	220	ns
Turn-OFF Time	t_{off}	"		150	300	ns

※ : The 2SA1729 is classified by 100mA h_{FE} as follows :

70	Q	140	100	R	200	140	S	280
----	---	-----	-----	---	-----	-----	---	-----

Marking : AG








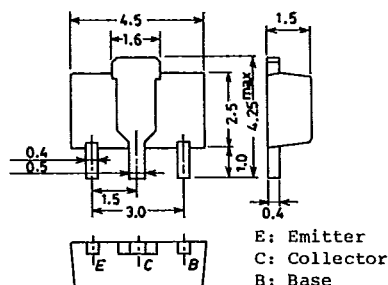
 h_{FE} rank : Q, R, S**Switching Time Test Circuit****Case Outline 2038**
(unit : mm)E: Emitter
C: Collector
B: Base

SANYO: PCP

6089MO, TS No. 3133-1/3



2SA1729

T-37-15

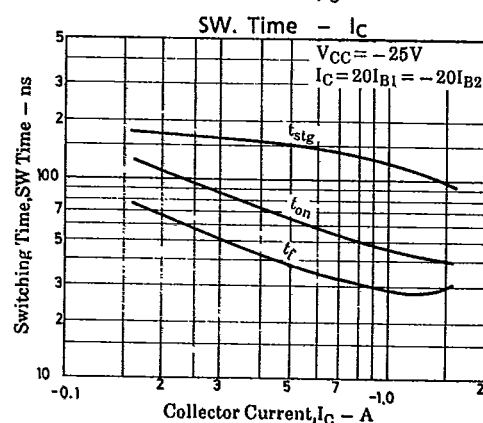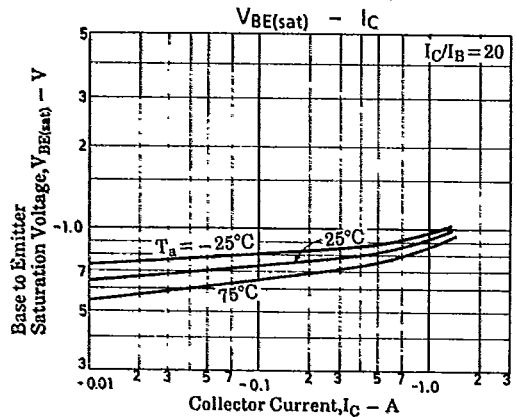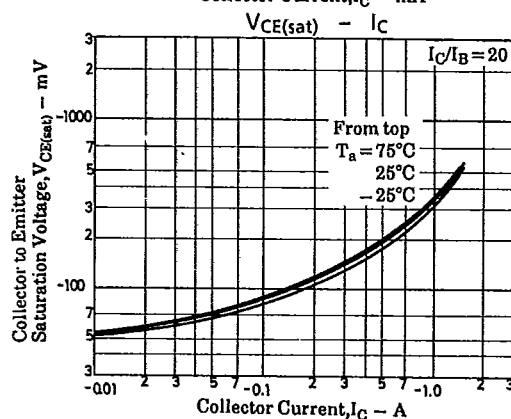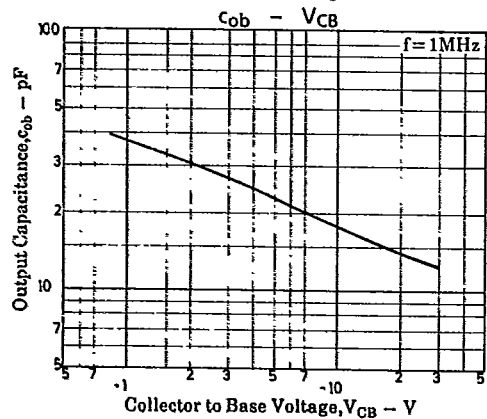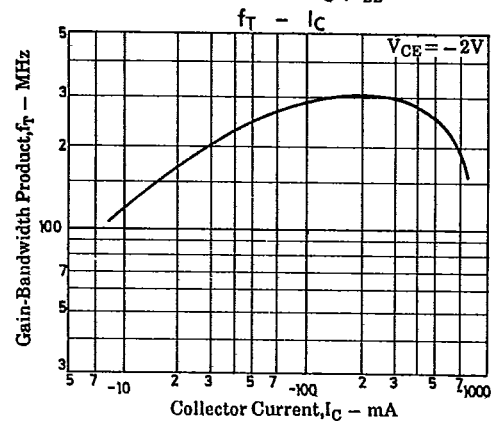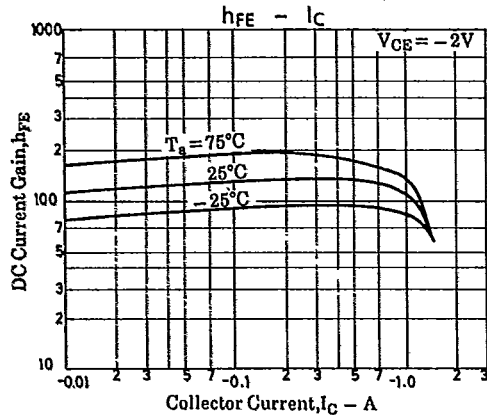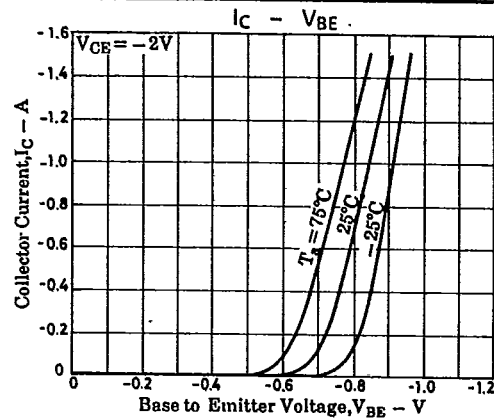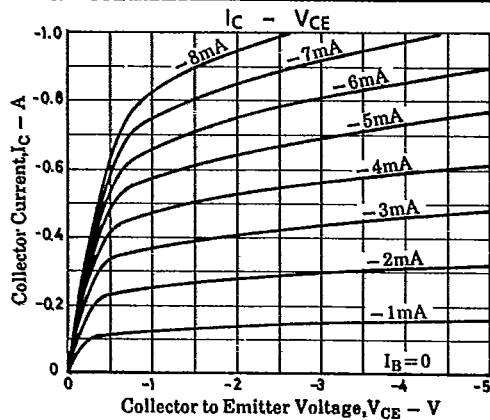

2SA1729

T-37-15

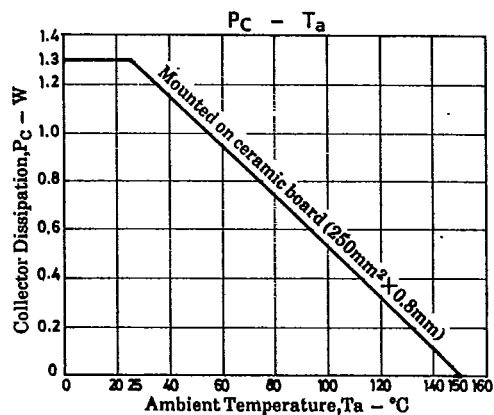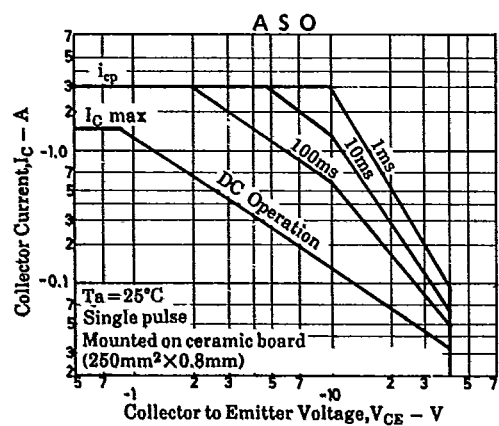


T-91-20


CASE OUTLINES OF SURFACE MOUNT TRANSISTORS

- All of Sanyo surface mount transistor case outlines are illustrated below.
- All dimensions are in mm, and dimensions which are not followed by min. or max. are represented by typical values.
- No marking is indicated.


Case Outline—[2018A] unit: mm




Case Outline—[2038] unit: mm

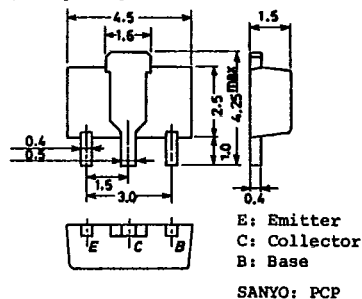


Case Outline—[2024A] unit: mm




Case Outline—[2044] unit: mm




Case Outline—[2028A] unit: mm




Case Outline—[2046] unit: mm



Case Outline—[2030A] unit: mm




Case Outline—[2050] unit: mm

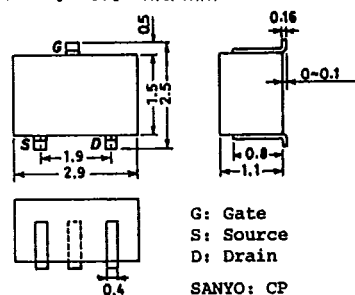


T-91-20


Case Outline—[2057] unit: mm




Case Outline—[2066] unit: mm




Case Outline—[2058] unit: mm




Case Outline—[2067] unit: mm




Case Outline—[2059] unit: mm




Case Outline—[2068] unit: mm




Case Outline—[2062] unit: mm




Case Outline—[2069] unit: mm




Case Outline—[2065] unit: mm

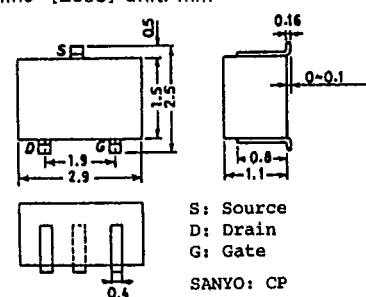

Case Outline—[2070] unit: mm




Case Outline—[2071] unit: mm



T-9120

Case Outline—[2072] unit: mm



Case Outline—[2073] unit: mm

